This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEW ACTIVITY YD, MC, 82, DCSC
USER ACTIVITY ME, EL

DD FORM 1 SEP 67 672-1 (Coordinated)

P.A. Army - ME
Other Cust Navy - YD
Air Force - 82

PROCUREMENT SPECIFICATION MIL-E-46717

SUPERSEDES


TITLE ENGINE, GASOLINE, AIR-COOLED, INDUSTRIAL-TYPE 4-CYCLE, 3 NET CONTINUOUS H P


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


MILITARY STANDARD MS39298

SHEET 1 OF 2

FED SUP CLASS 2805

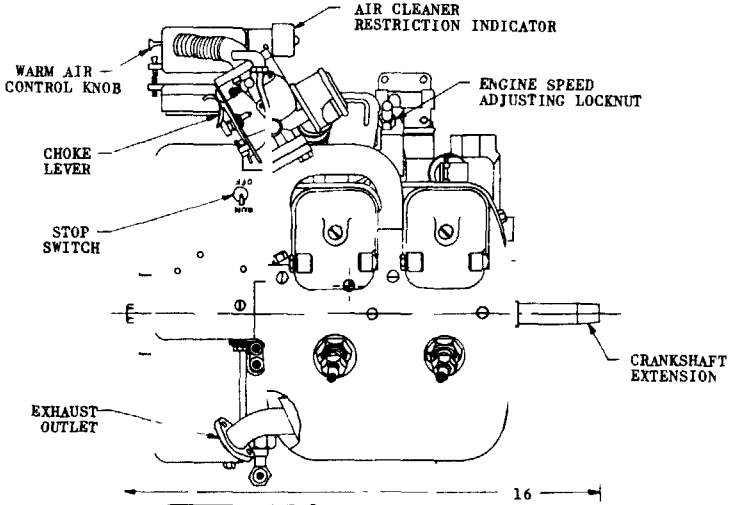

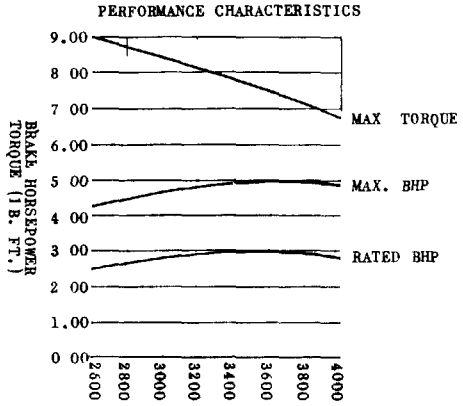

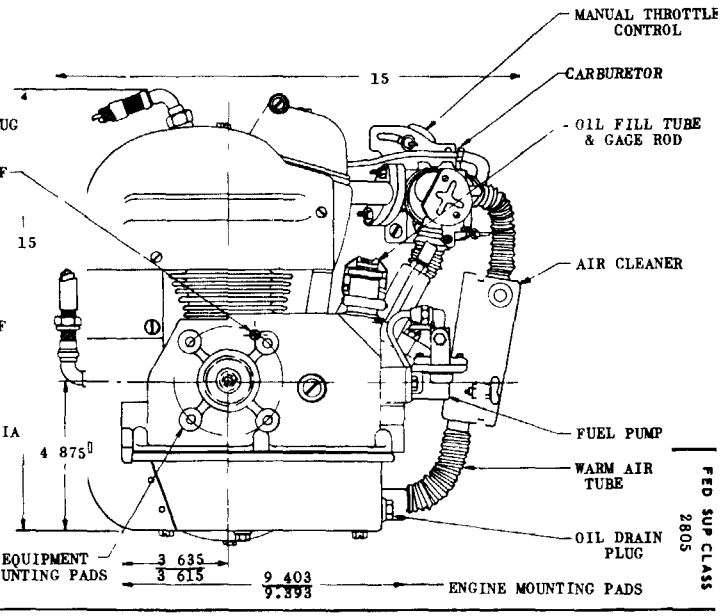

APPROVED 13 JULY 66 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

REVIEW ACTIVITY YD, MC, 82, DCSC
USER ACTIVITY: ME, KL

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

ENGINE CHARACTERISTICS

MODEL 2A016	FSN-2805-072-4871
TYPE	4-CYCLE, OVERHEAD VALVE, AIR COOLED, GASOLINE
NUMBER OF CYLINDERS	2
BORE X STROKE (IN)	2 25 X 2 00
DISPLACEMENT (CU IN.)	15 90
RATED HORSEPOWER (CONTINUOUS)	3 0 BHP AT 3600 RPM
MAXIMUM HORSEPOWER (AS SHIPPED) W O.T	4 2 BHP AT 3600 RPM
MAXIMUM HORSEPOWER (AFTER BREAK-IN) W.O.T	4 8 BHP AT 3600 RPM
OPERATING SPEED RANGE	2600 TO 4000 RPM
ACCESSORIES FURNISHED WITH ENGINE	AIR CLEANER, FUEL FILTER, FUEL PUMP, ROPE STARTER, GOVERNOR, AND MUFFLER
MILITARY SPECIFICATION	MIL-E-46717
TECHNICAL MANUAL	TM5-2805-206-14 & 24P
LUBRICATION ORDER	1 05-2805-206-14
INSTALLATION MANUAL	MIL-STD-1227
ACCESSORIES NOT FURNISHED WITH ENGINE	FUEL TANK
DRY WEIGHT (LBS)	46

NOTES

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
3. ALL DIMENSIONS ARE IN INCHES
4. UNLESS OTHERWISE SPECIFIED TOLERANCE SHALL BE $\pm 1/64$.

APPROVED 13 JULY 66 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.