
MILITARY SPECIFICATION SHEET

INSULATORS, STANDOFF
(STYLE 21)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

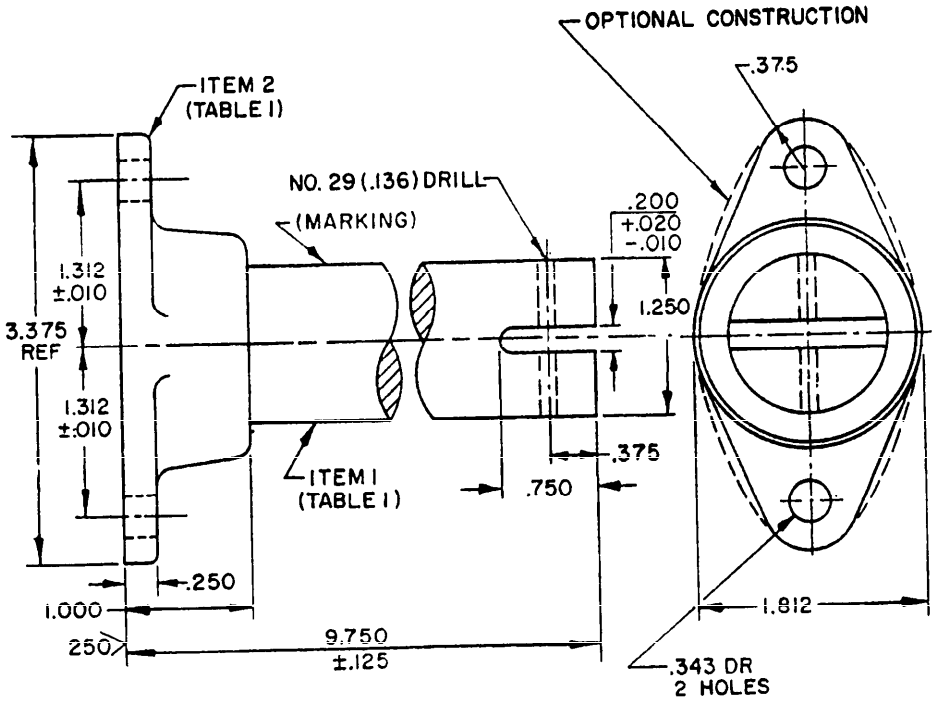

INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.250	6.35	1.250	31.75
.020	.51	.343	8.71	1.312	33.32
.125	3.18	.375	9.53	1.812	46.02
.136	3.45	.750	19.05	3.375	85.73
.200	5.08	1.000	25.40	9.750	247.65

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style 21 standoff insulator.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:06Z
Check the source to verify that this is the current version before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Insulator	Ceramic, type A, grade 422 or better, brown glaze, per MIL-I-10	1
2	Base	Brass per QQ-B-637 or QQ-B-621; or bronze per QQ-L-225	1

TABLE II. Type designation.

Type designation	Dimensions
NL422B21-078	See figure 1

REQUIREMENTS:

Dimensions: See figure 1.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ±.020 inch.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0153)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:06Z
Check the source to verify that this is the current version before use.