MIL-S-15825A

21 June 1972

SUPERSEDING
MIL-S-15825(BuMed)
15 November 1950

MILITARY SPECIFICATION

SCRIBER, DIAMOND POINT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers diamond marking pencils for inscribing glass surfaces.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-A-200/3	-	Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded, 2024.
PPP-P-40	-	Packaging and Packing of Hand Tools.

STANDARD

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:05Z
Check the source to verify that this is the current version before use.

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Iron and Steel Institute (AISI)

C1213 - Carbon Steel

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East Fourth Second Street, New York, New York 10017.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Material.- Material shall conform to the requirements specified herein.

* 3.1.1 Diamond.- Diamond shall be a South or West African natural diamond, grade AA drill material, free from fractures or large inclusions (no Congos will be accepted).

* 3.1.2 Steel.- Steel shall conform to AISI Standard C1213.

* 3.1.3 Aluminum.- Aluminum shall conform to temper T4, 2024 of QQ-A-200/3, and have an anodized finish.

* 3.2 Style and design.- Style and design shall be in accordance with figure 1 with a ± 1/16 inch tolerances in the specified dimension. The diamond shall be mounted in a nib made of steel specified in 3.1.2 and may be bonded or welded directly to the steel nib in a vacuum furnace, and coned to an included angle of 105° ± 1° after mounting. Diamond shall weigh not less than 6 points before coning. Loss of weight in shaping shall be not more than 30 percent. Nib shall be securely set in an hexagonal rod shaped handle, made of aluminum specified in 3.1.3, 0.20 to 0.25 inch across the flats, by tight force fit and spinning or by epoxy cement. Overall length of scriber shall be 6 inches ± 1/4 inch. The handle shall have a dull matte finish.

3.3 Workmanship.- The scriber shall be clean, well made, and free of burrs, scratches, or sharp edges (except for point of diamond).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:05Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.2.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, standards, and drawings unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item inspection.- The lot shall consist of all finished diamond point scribers offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated and finished scriber.

4.2.2.1 Visual examination.- The end item shall be examined for defects listed in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0, expressed in terms of defects per hundred units.

TABLE I.- Examination of visual defects

Examine	Defect
Finish	Not type specified Evidence of corrosion
Material	Not as specified
Workmanship	Burrs, sharp edges, scratches, or loose nib

* 4.2.2.2 Dimensional examination.- Inspection shall be made of scribers for compliance with dimensions specified. Any dimension that is not within the specified tolerances shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:05Z
Check the source to verify that this is the current version before use.

* 4.2.2.3 Diamond certification.- Certification that diamond is a South or West African natural grade AA drill material diamond shall be made available to the Government representative.

4.2.3 Examination for preparation for delivery requirements.- Inspection shall be made for preservation, packaging, packing and marking in accordance with PPP-P-40.

5. PREPARATION FOR DELIVERY

* 5.1 Preservation, packaging, packing, and marking for level A, B, or C shall be in accordance with PPP-P-40 (see 6.1).

6. NOTES

6.1 Ordering data.- Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Selection of applicable levels of preservation, packaging, and packing (see 5.1).

6.2 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Preparing activity:

Army - GL

Project No. 5120-0748

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:05Z
Check the source to verify that this is the current version before use.

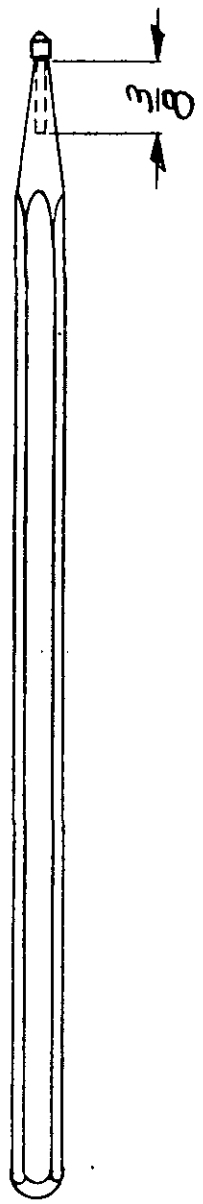


FIG 1- SCRIBER, DIAMOND POINT

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:05Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:05Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Scriber, Diamond Point MIL-S-15825A

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:05Z
Check the source to verify that this is the current version before use.