MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

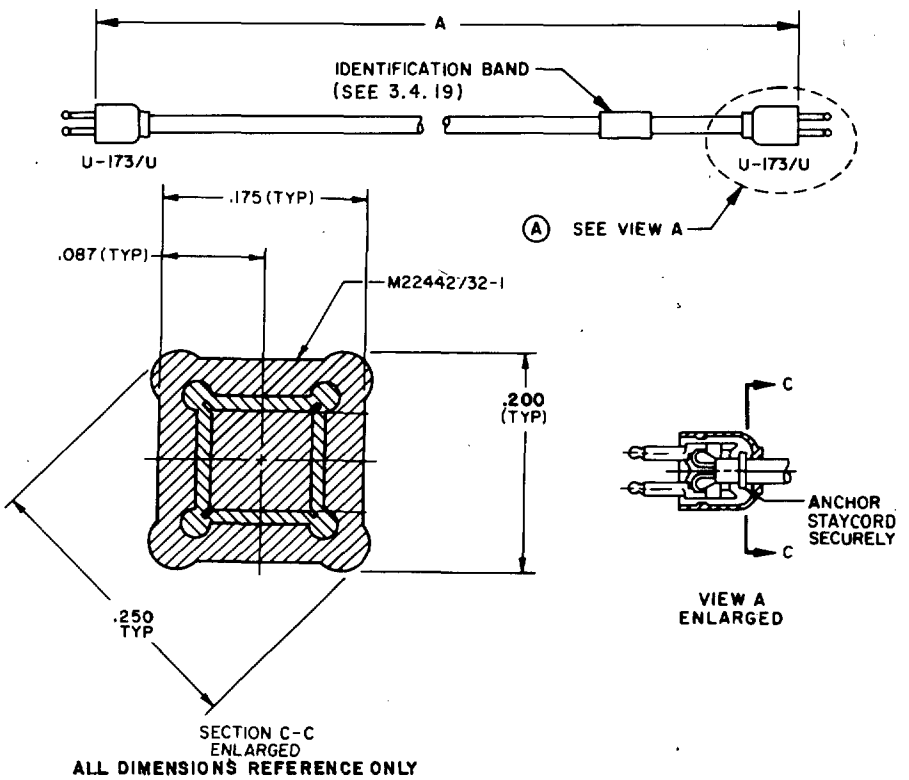


FIGURE 1. Cable assembly.

TABLE I.

Dimension A	Part Number
6.25	M22442/36-1
9.00	M22442/36-2
13.00	M22442/36-3
16.25	M22442/36-4
19.50	M22442/36-5
23.00	M22442/36-6

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.




FIGURE 2. Cable assembly P/N M22442/36-X.

APPLICABLE DOCUMENTS:

MIL-C-55668	Cord, Electrical, Radio Subminiature (Retractile and Straight)
MIL-C-10392	Cord, Electrical (Audio Miniature)

APPLICABLE DRAWINGS

AIR FORCE

57B12662	Connector, Plug Electrical U-173/U
57B12664	Tip - Electrical, Plug Connector

REQUIREMENTS:

1. The cable shall be in accordance with MIL-C-55668 Type III 2 conductor or MIL-C-10392 Type WD-27.

2. The stay cord shall be firmly attached to the connectors.

(A) 3. The DC resistance shall be less than 2 ohms between the following contacts:

   (a) Contact 1 of U-173/U and contact 1 of U-173/U.

   (b) Contact 2 of U-173/U and contact 2 of U-173/U.

4. The cable assembly shall be tested in accordance with the tests listed in Table II.

(A) 5. The weight of the cable assemblies shall not be greater than 1 ounce.

6. The U-173/U connector shall be made in accordance with Air Force drawings 57B12662 and 57B12664.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Tolerances are +.5 -0 inches for cables under 10 inches and +1 -0 for cables over 10 inches.
3. These cables are for use with microphone assemblies only and are not approved for individual procurement.

Custodians:
Air Force - 85
Army - CR

Review Activities:
Air Force - 11
Air Force - 99
DLA - ES

Preparing Activity:
Navy - AS
Project No. 5995-0120-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

(A) TABLE II.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
GROUP C					
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.

Source: https://assist.dla.mil Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.