
REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL
SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN TH
DODISS SPECIFIED IN THE SOLICITATION MIL-T-27535.


ST OF THIS
ISSUE OF THE

THIS SPECIFI N IS APPROVED FOR USE BY all Departments and Agencies
of the Depa ment of Defense.

Form Approved
OMB No 0704-0188

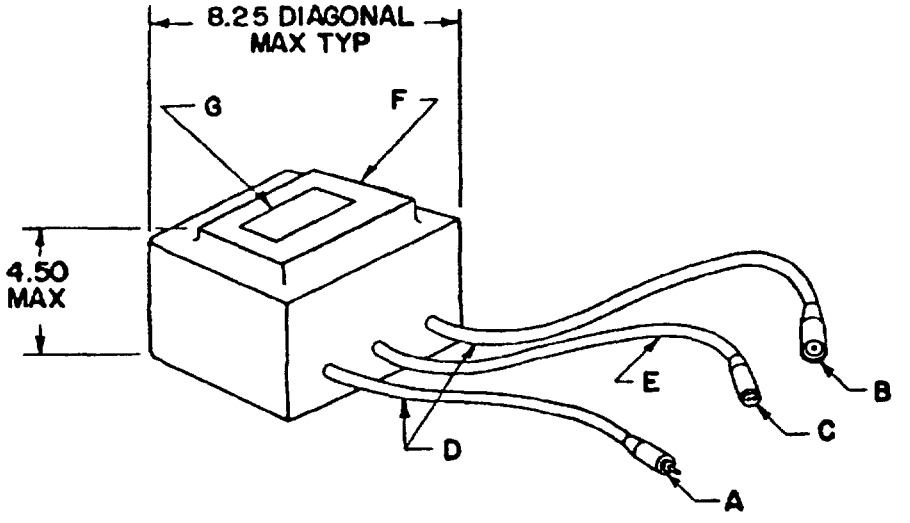

© ENVELOPE OPTION 1

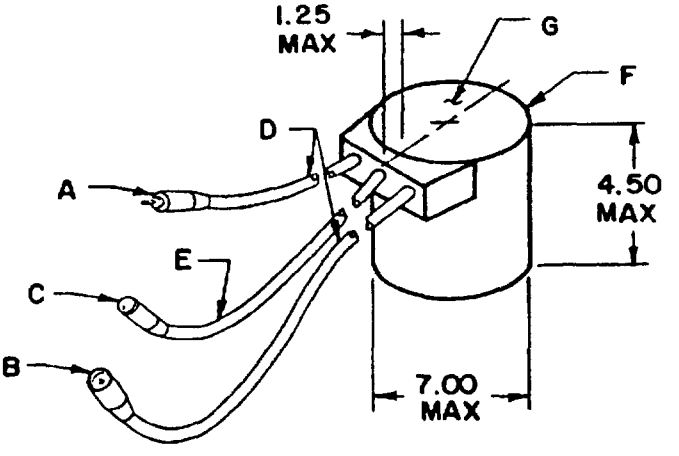

© ENVELOPE OPTION 2

© Denotes Changes

PREPARING ACTIVITY Air Force-85 CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA Navy-AS REVIEW Air Force-99, 11, DLA-ES USER PROJECT NUMBER 5950-0762	MILITARY SPECIFICATION SHEET TITLE TRANSFORMER, POWER, ISOLATION, AIRPORT LIGHTING, 200W/6 6A/6 6A/5000V	SPECIFICATION SHEET NUMBER MS27288C 15 Nov 1990 SUPERSEDING MS27288B 18 Aug 1965 AMSC N/A FSC 5950
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited		Page 1 of 2

Source: https://assist.dla.mil - Downloaded: 2026-02-23T15:21Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-T-27535

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704-0188

ELECTRICAL CHARACTERISTICS					
PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS	LOAD
6.6	95	90		6 53-6 67	4 8 OHMS (a)
6 6				6 6 -7 1	SHORT CIRCUITED
6 6			100	0	OPEN CIRCUITED
5.2				5 1 -5 4	3 9 OHMS (a)
4.1				4 0 -4.3	3 2 OHMS (a)
3 4				3 3 -3.6	2 8 OHMS (a)
2 8				2 7 - 3.0	2 3 OHMS (a)

(a) THE LOAD MAY BE EITHER A 200W, 6 6A LAMP OR THE OHMIC RESISTANCE SPECIFIED

A PLUG FIGURE 6a FAA SPECIFICATION L-823

B. RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823.

C RECEPTACLE FIGURE 1c FAA SPECIFICATION L-823

D. PRIMARY CABLE

E. SECONDARY CABLE.

F. CASE

G IDENTIFICATION MARKING (LOCATION OPTIONAL)

PART NO.	LEAD LENGTH INCHES	
	D	E
MS27288-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES

MAXIMUM WEIGHT 13 POUNDS

DIMENSIONS IN INCHES

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

PREPARING ACTIVITY Air Force-85
CUSTODIANS ARMY NAVY-
AIR FORCE 85 DLA
Navy-AS
REVIEW Air Force-99, 11, DLA-ES
USER
PROJECT NUMBER 5950-0762

MILITARY SPECIFICATION SHEET
TITLE TRANSFORMER, POWER, ISOLATION, AIRPORT LIGHTING, 200W/6 6A/6 6A/5000V

SPECIFICATION SHEET NUMBER
MS27288C
SUPERSEDING MS27288B 18 Aug 1965
AMSC N/A FSC 5950

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Page 2 of 2

DD Form 672, MAY 88 Previous editions are obsolete

GPO 5 GOVERNMENT PRINTING OFFICE 1988 240 979/80020

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:21Z
Check the source to verify that this is the currenversion before use.