
FED. SUP CLASS
6640

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - OS
AIR FORCE - 82

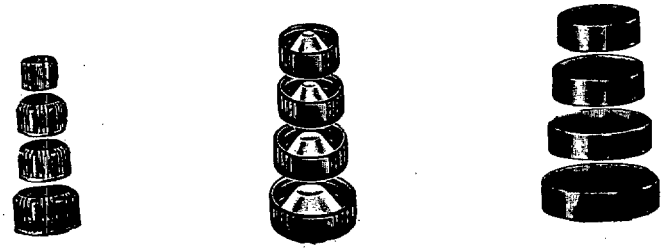

PART NUMBER	THREAD SIZE (mm)	TYPE OF LINER (See LEGEND)
MS36409-1	8	A
MS36409-2	10	A
MS36409-3	13	A
MS36409-4	15	A, D, E
MS36409-5	18	A, B, D, E
MS36409-6	20	A, B, C, D, E
MS36409-7	22	A, B, C, D, E
MS36409-8	24	A, B, C, D, F
MS36409-9	28	A, B, C, D, F
MS36409-10	33	A, B, C, D
MS36409-11	38	A, B, C, D, F
MS36409-12	43	A, D
MS36409-13	45	A
MS36409-14	48	A, D
MS36409-15	51	D
MS36409-16	53	A
MS36409-17	58	A, D
MS36409-18	63	A
MS36409-19	70	A, D
MS36409-20	89	A
MS36409-21	100	A

LEGEND

TYPES OF LINERS

A - Pulp Backed Vinyl Plastic
B - Conical Polyethylene
C - Aluminum Foil
D - Tin Foil
E - Rubber Faced With Tetrafluoroethylene
F - Rubber

MATERIAL: Caps shall be made of molded black phenol-formaldehyde resin. The liners shall be as specified in the legend and indicated by suffix letters in the table.

DESIGN: Caps shall be molded to fit bottle finish GPI (Glass Packaging Institute) thread size as specified. Style I and II caps shall have ribs for easy gripping. Style III caps shall have a smooth surface. Liners shall be cemented to the inside top of caps.

Vinyl plastic liners may be used on bottles containing dilute acids and alkalies. Polyethylene cone liners (Type B) eliminate leakage, evaporation,

APPROVED 30 JUN 1983 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		CAP, SCREW, BOTTLE AND JAR	MS36409
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 2

PROJECT NUMBER 6640-1181

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:40Z
Check the source to verify that this is the current version before use.

contamination, binding and backoff; resistant to moisture fungi, high and low temperature; wetting by aqueous solutions and vapor transfer.

Size numbers are equivalent to inside diameter of cap in millimeters measured at bottom of threads.

Part number shall be specified with a suffix letter (MS36409-1A) to indicate the type of liner.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVISED

APPROVED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust		CAP, SCREW, BOTTLE AND JAR	MS36409
Procurement Specifications	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1181

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:40Z
Check the source to verify that this is the current version before use.