MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, SOCKET HEAD, ELECTRONIC COMPONENTS, TYPE II, CLASS I, COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool described herein shall consist of this document and the latest issue of specification MIL-I-81969.

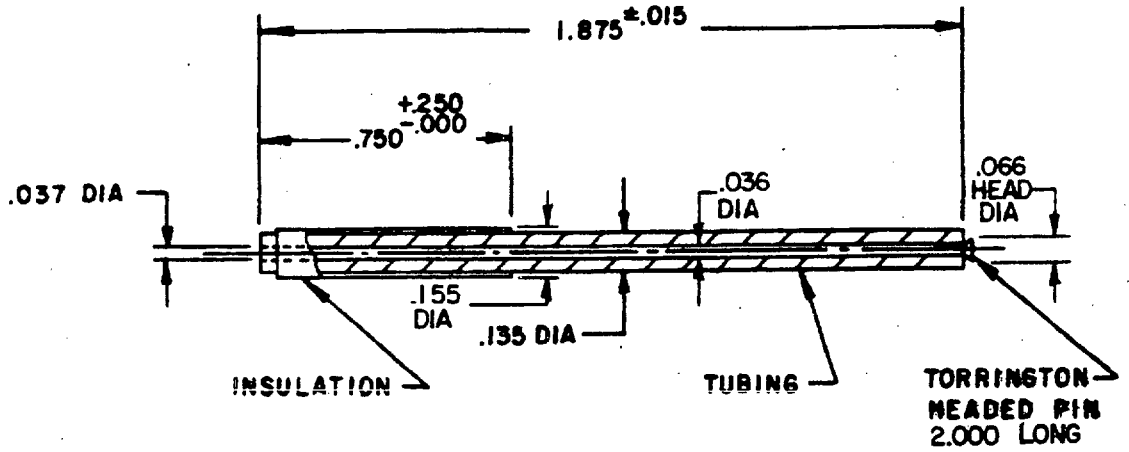


FIGURE 1A.

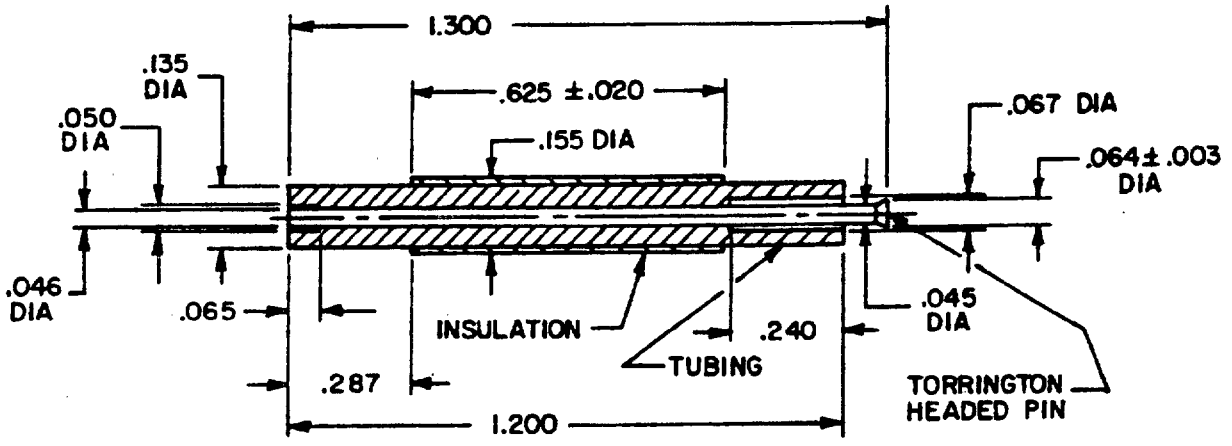


FIGURE 1B.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 inch (.13 mm).
4. Each tool shall be legibly and permanently marked in accordance with MIL-STD-130.

FIGURE 1. Removal tool.

FSC 5120

(A) Entire Specification Revised.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

Inches	MM	Inches	MM
.003	.08	.067	1.70
.015	.38	.135	3.43
.020	.51	.155	3.94
.036	.91	.240	6.10
.037	.94	.250	6.35
.045	1.14	.287	7.25
.046	1.17	.625	15.88
.050	1.27	.750	19.05
.064	1.63	1.200	30.48
.065	1.65	1.300	33.02
.066	1.68	1.875	47.63
		2.000	50.80

REQUIREMENTS:

Dimensions and configuration: See figure 1A or figure 1B (as applicable).

Materials:
Torrington headed pin: Tool steel.
Insulation: Polyolefin heat shrinkable tubing (red).
Tubing: 304 stainless steel half hard temper.
Rotation and Thrust: Not Applicable.

Table I

Dash No.	Applicable Figure	Applicable Contact From MIL-S-83505/6
01	1A	-001, -002 and -003
02	1B	-004

Part Number: M81969/43 - (Dash number from Table I).

Application: This tool shall be used to remove the applicable contacts from MIL-S-83505/6 as specified in Table I.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review Activities:
Army - AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 17, 85, 99
DLA - ES

User Activites:
Army - ME
Navy - MC
Air Force - 19

Preparing Activity:
Air Force - 85

Agent:
DLA - ES

(Project 5120-B008)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.