
MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, (TYPE CR CONNECTOR) TYPE II, CLASS 1, COMPOSITION A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

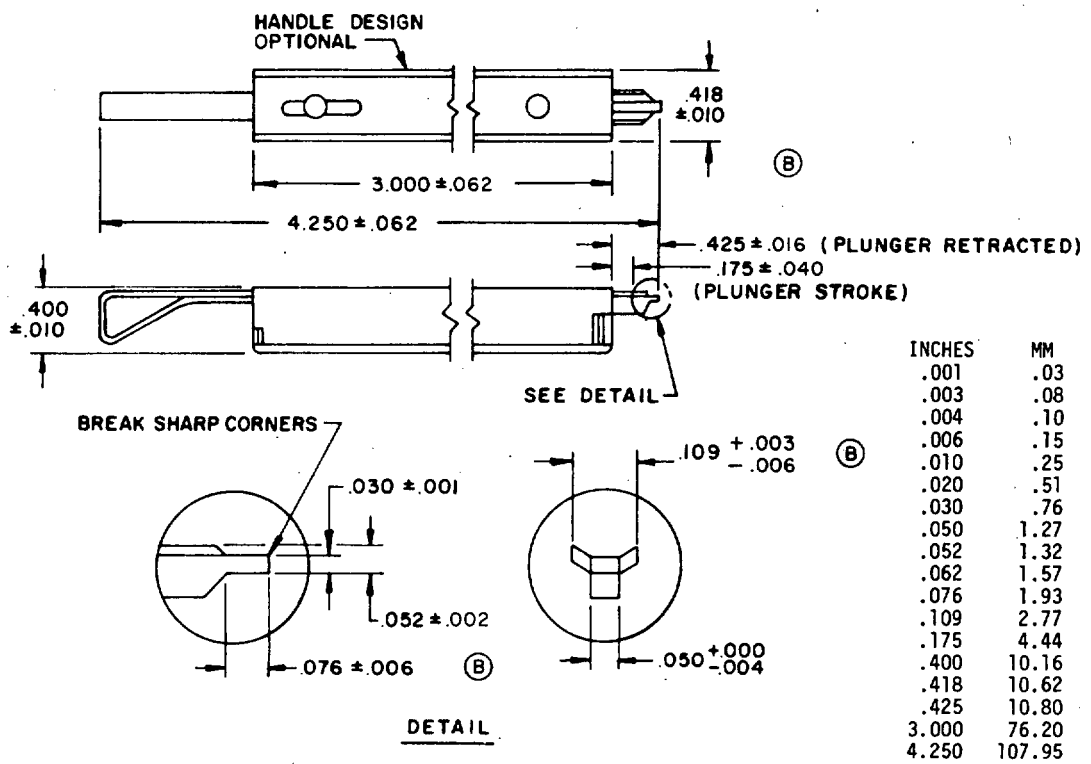

INCHES	MM
.001	.03
.003	.08
.004	.10
.006	.15
.010	.25
.020	.51
.030	.76
.050	1.27
.052	1.32
.062	1.57
.076	1.93
.109	2.77
.175	4.44
.400	10.16
.418	10.62
.425	10.80
3.000	76.20
4.250	107.95

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 inch (.13 mm).
4. The probe and plunger shall be permanently attached to the body of the tool, therefore, the tool is nonreparable.
5. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.

FIGURE 1. Removal tool.

Ⓑ Denotes changes.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—703-023/4292

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Steel.

Finish: Blackened.

Rotation: Not applicable.

Thrust: Not applicable.

Impact strength: Not applicable.

Part number: M81969/6-01.

Application: This tool shall be used to remove contacts conforming to MIL-C-21097/16 and 17, when assembled in connectors conforming to MIL-C-21097/13.

(B) Supersession data: MIL-C-21097/18C, dated 10 October 1972.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

(Project 5120-0967)

☆U.S. GOVERNMENT PRINTING OFFICE: 1979 — 603-022/526

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.