
MIL-B-3628 / 36C
10 February 1988
SUPERSEDING
MIL-B-3628 / 36B
31 October 1969

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.



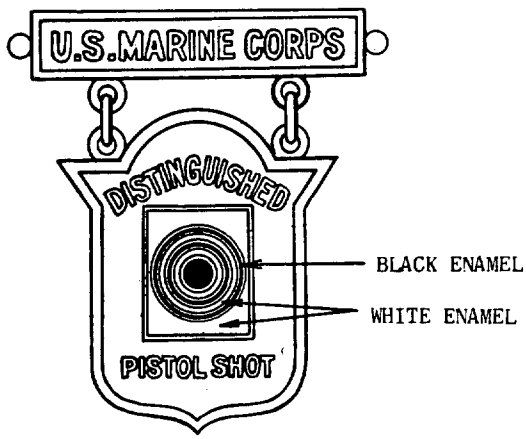

MATERIAL: 1/10 10 KARAT GOLD FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)

DIMENSIONS (INCHES):
- HEIGHT (OVERALL):
  - PENDANT: 1-17/64 (REF)
  - SUSPENSION BAR: 9/32 (REF)
- WIDTH (OVERALL):
  - PENDANT: 1-1/16 (REF)
  - SUSPENSION BAR: 1-1/2 (REF)
- THICKNESS (AT RIM):
  - PENDANT: .062 (REF)
  - SUSPENSION BAR: .062 ± .005 (REF)

FINISH:
- PENDANT:
  - OBVERSE: ENAMELED, GOLD PLATED, SMUDGED, HIGHLIGHTS POLISHED
  - REVERSE: MIRROR-LIKE POLISHED
- SUSPENSION BAR:
  - OBVERSE: GOLD PLATED, SMUDGED, HIGHLIGHTS POLISHED
  - REVERSE: MIRROR-LIKE POLISHED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.

NOTES:

1. LINKS SHALL BE 7/32 + 1/64 INCH IN LENGTH BY 5/32 + 1/64 INCH IN WIDTH AND SHALL BE FABRICATED FROM .044 + .002 INCH IN DIAMETER WIRE.

2. THE LUGS SHALL BE FABRICATED FROM .044 + .002 INCH DIAMETER GOLD PLATED WIRE AND SHALL BE GOLD SOLDERED TO THE PENDANT AND SUSPENSION BAR 3/4 + 1/64 INCH ON CENTERS. THE LUGS SHALL HAVE AN OUTSIDE DIAMETER OF 5/16 + 1/64 INCH. AT OPTION OF THE MANUFACTURER, THE LUGS ON THE PENDANT MAY BE MADE AN INTEGRAL TYPE, PROVIDED THE FINISHED DIMENSIONS ARE THE SAME AS THOSE SPECIFIED FOR THE SOLDERED TYPE.

3. THE ATTACHING DEVICE SHALL BE THE PRONG AND FLAT BALL TYPE CLUTCH. THE PRONGS AND CLUTCH SHALL BE FABRICATED FROM NICKEL SILVER AND SHALL BE CENTERED ON THE BACK OF THE SUSPENSION BAR EQUIDISTANT FROM THE ENDS AND 1-1/16 + 1/32 INCHES ON CENTERS.

4. ENAMELED AREAS SHALL BE AS INDICATED. THE ENAMEL SHALL MATCH THE ENAMEL ON THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIP NUMBERS LISTED BELOW:

COLOR	CHIP NO.
WHITE	28
BLACK	26

Custodian:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

★ U.S. GOVERNMENT PRINTING OFFICE: 1988 505-033/90863

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.