A-A-51032
16 October 1985

COMMERCIAL ITEM DESCRIPTION

FORCEPS, CASTING REMOVING, DENTAL

The General Services Administration has authorized this commercial item description in preference to Military Specification, MIL-F-36571.

This commercial item description covers dental casting removing forceps for use in removing precious metal castings from pickling acid solutions.

Salient characteristics:

The forceps shall be a tweezer type, of two-piece construction, with the proximal ends of the two members secured together by spot welding. Each member shall be fabricated of a chromium or nickel plated carbon steel. The spring section of the forceps shall have a Rockwell hardness of C15 to C25 under 150 kgf load or a Vickers hardness of 211 to 266 (see ASTM Designation E 140). The operative end of the forceps shall be coated with a fused, tough, resilient, abrasive-resistant plastistol and shall be of such thickness and durability to resist attack of corrosive pickling solutions, such as aqua regia and a 20% sodium hydroxide solution. The coating shall be smooth and rounded over its entire surface and shall be free from pits and voids. The beak of the operative end shall be bent to form a 40 degree ± 10 degree angle with respect to the long axis of the handle. The tips shall be rounded and capable of touching each other. The forceps shall not cause electrochemical corrosion when used to remove gold castings from pickling solutions. The forceps shall have an overall length of 6-3/4 ± 3/8 inch, with the plastisol coating covering 2-1/2 ± 1/4 inch from the tip. The width of the handle shall have a minimum convexity of 11/32 inch and the length of the beak (metal tip to radial center of bend) shall be 5/8 ± 3/16 inch. Forceps shall be in accordance with Figure 1.

The exposed metal portions shall have a polished, plated finish.

Workmanship. The forceps shall be free from defects which detract from their appearance or impair their serviceability.

Unit. Each (EA). One pair of forceps, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

FSC 6520

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

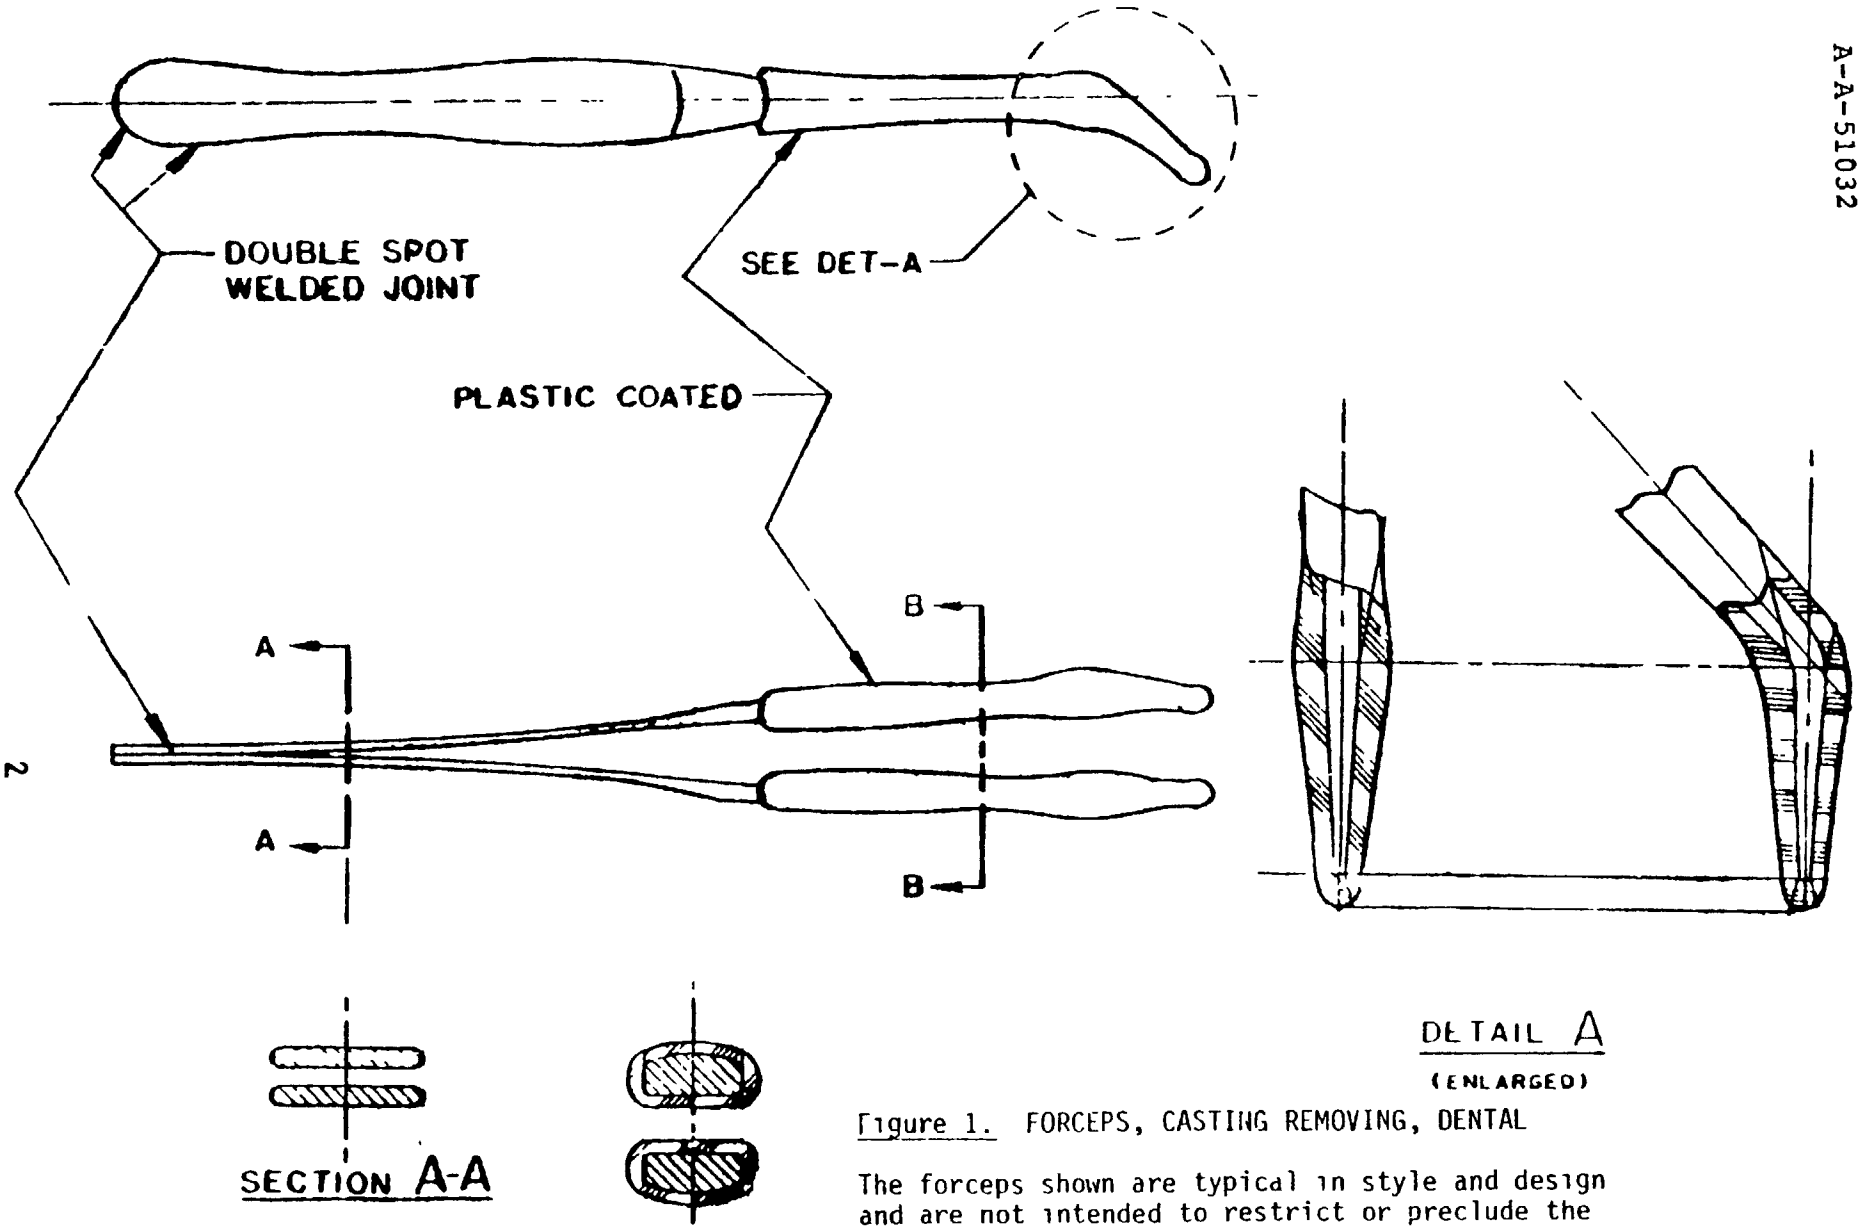


Figure 1. FORCEPS, CASTING REMOVING, DENTAL

The forceps shown are typical in style and design and are not intended to restrict or preclude the purchase of forceps which are otherwise in accordance with the requirements of this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for inspection. Sampling for inspection shall be conducted in accordance with MIL-STD-105. Where feasible, the sample shall be used for the determination of two or more inspection characteristics. The unit of product for test purposes shall be one forceps. Unless otherwise specified, sampling for examination shall be conducted at inspection level II, AQL 2.5, and sampling for tests (when applicable) shall be conducted at inspection level S-1, AQL 1.0.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U. S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

A-A-51032

NOTE: The following National Stock Number is covered by this document:

6520-00-817-2529 FORCEPS, CASTING REMOVING, DENTAL

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be as specified in the contract and/or order.

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD-MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITY:

VA-OSS

Project No. 6520-1809

Location S2-8-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.