COMMERCIAL ITEM DESCRIPTION

RETAINER, CAPACITOR

The General Services Administration has authorized the use of this commercial item description (CID).

Abstract. This CID covers the general requirements for oval retainers for capacitors.

Part or Identifying Number (PIN). The PIN for the CID shall be as shown in the following example:

A-A-55424	-	01	A
CID number		Dash number (see figure 1 dimensions)	Configuration (see figure 1)

Salient characteristics.

Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified herein.

Material.

Configuration A. Material shall be .030 steel spot welded to feet of .060 steel (three-piece construction).

Configuration B. Material shall be .035 steel (one-piece construction).

Finish. Finish shall be zinc plated.

Workmanship. Retainers shall be free of burrs and sharp edges.

Design and construction. Retainers supplied to this CID shall be as specified herein (see figure 1).


Marking. Retainers supplied to this CID shall be identified and marked with paper labels with the manufacturer's standard commercial PIN.

Regulatory requirements. Not applicable.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

CONFIGURATION A

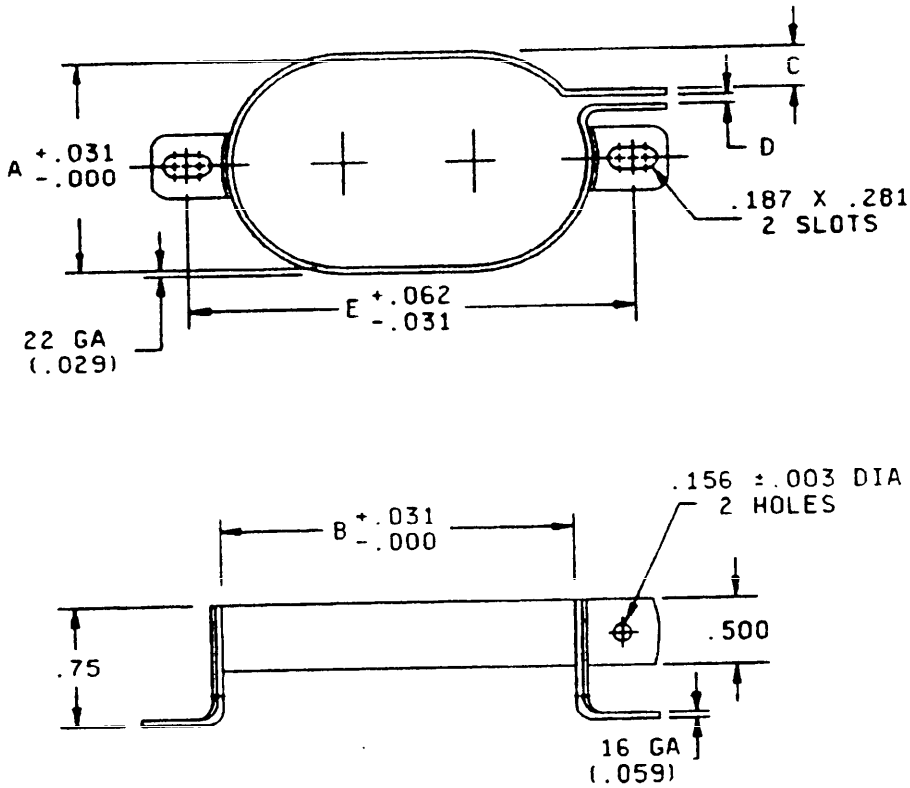


CID PIN A-A-55424-	Dimension chart				
	Dimension A	Dimension B	Dimension C	Dimension D	Dimension E
-01A	1.250	2.062	.125	.125	2.688
-02A	1.812	2.812	.312	.125	3.438
-03A	1.875	3.562	.500	.125	4.188
-04A	2.125	2.844	.500	.125	3.469
-05A	1.500	2.641	.188	.125	3.188

Inches	mm
.125	3.18
.188	4.78
.312	7.92
.500	12.70
1.250	26.04
1.500	37.10
1.812	46.02
1.875	47.63
2.062	52.37
2.125	53.98
2.641	67.08
2.688	68.02
2.812	71.42
2.844	72.24
3.188	79.98
3.438	86.33
3.469	87.11
3.562	89.47
4.188	106.38

Figure 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

CONFIGURATION B

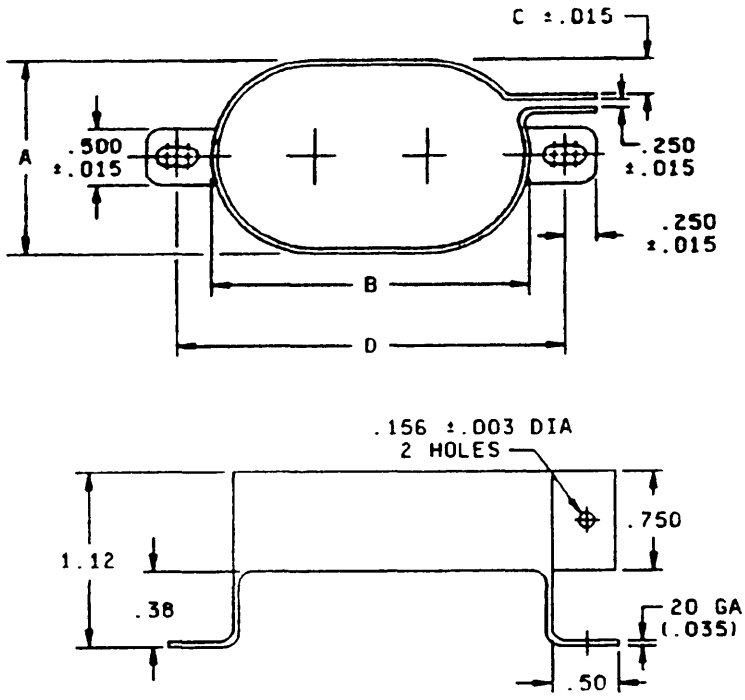

CID PIN A-A-55424-	Dimension chart			
	Dimension A	Dimension B	Dimension C	Dimension D
-06B	1.234	2.062	.125	2.688
-07B	1.797	2.797	.312	3.438
-08B	1.859	3.547	.500	4.188
-09B	1.484	2.609	.188	3.266
-10B	1.254	2.072	.125	2.688
-11B	1.750	2.766	.312	3.438

Inches	mm
.125	3.18
.188	4.78
.312	7.92
.500	12.70
1.234	31.34
1.250	31.85
1.484	37.69
1.750	44.45
1.797	45.64
1.859	47.22
2.062	52.37
2.072	52.63
2.609	66.27
2.688	68.28
2.766	70.26
2.797	71.04
3.266	81.96
3.438	89.33
3.547	89.09
4.188	106.38

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.003 (0.08 mm) for three place decimals and ±.02 (0.5 mm) for two place decimals.

Figure 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

Quality assurance provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance. A certificate of compliance shall accompany all retainers supplied to this CID.

Packaging.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order.

Notes. This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory.

Ordering data. Acquisition documents should specify the following:

a. CID document number and revision and CID PIN.

b. Quality assurance provisions.

c. Packaging requirements.

Comments. Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN: DESC-EMM, Dayton, OH 45444-5270, or telephone (513) 296-6003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

Suggested sources of supply. A suggested source of supply is listed in table I. Additional sources will be added as they become available.

TABLE I. Suggested source of supply.

CID PIN A-A-55424-	Vendor commercial PIN	Vendor CAGE number
01A	1C1747-01Z1	09166
02A	1C1747-02Z1	09166
03A	1C1747-03Z1	09166
04A	1C1747-04Z1	09166
05A	1C1747-05Z1	09166
06B	1C1748-01Z1	09166
07B	1C1748-02Z1	09166
08B	1C1748-03Z1	09166
09B	1C1748-05Z1	09166
10B	1C1748-06Z1	09166
11B	1C1748-07Z1	09166

Vendor CAGE number	Vendor name and address
09166	Stone City Products Company 1206 Seventh Street Bedford, IN 47421

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5910-D468)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.