A-A-55485/11
September 30, 1993
SUPERSEDING
MIL-M-38527/11
June 14, 1985

COMMERCIAL ITEM DESCRIPTION

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, VERTICAL TYPE

The General Services Administration has authorized the use of this commercial item description (CID) in preference to MIL-M-38527/11.

Abstract. This CID covers vertical type mounting pads.

Part or Identifying Number (PIN). The PIN shall be A-55485/11- (plus a dash number from figure 1). Complete PIN example: A-55485/11-001.

Salient characteristics.

Material. Material shall be acetal copolymer (A) or polyterephthalate thermoplastic (C).

Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1.

Regulatory requirements. This section is not applicable to this CID.

Quality assurance provisions. Quality assurance provisions shall be as specified in A-A-55485.

Packaging. Packaging shall be as specified in A-A-55485.

Suggested sources of supply. Suggested sources of supply are shown in table I.

Supersession data. Supersession data shall be as specified in table II.

Notes. The following information may be useful in acquiring the items described, but is not directive in nature.


Ordering data Ordering data shall be as specified in A-A-55485.

Comments. Comments and requests for changes to this CID should be directed to Defense Electronics Supply Center, ATTN DESC-EMM, 1507 Wilmington Pike, Dayton, OH 45444-5270, telephone (513) 296-5255, FAX (513) 296-8868.

AMSC N/A
FSC 5999

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

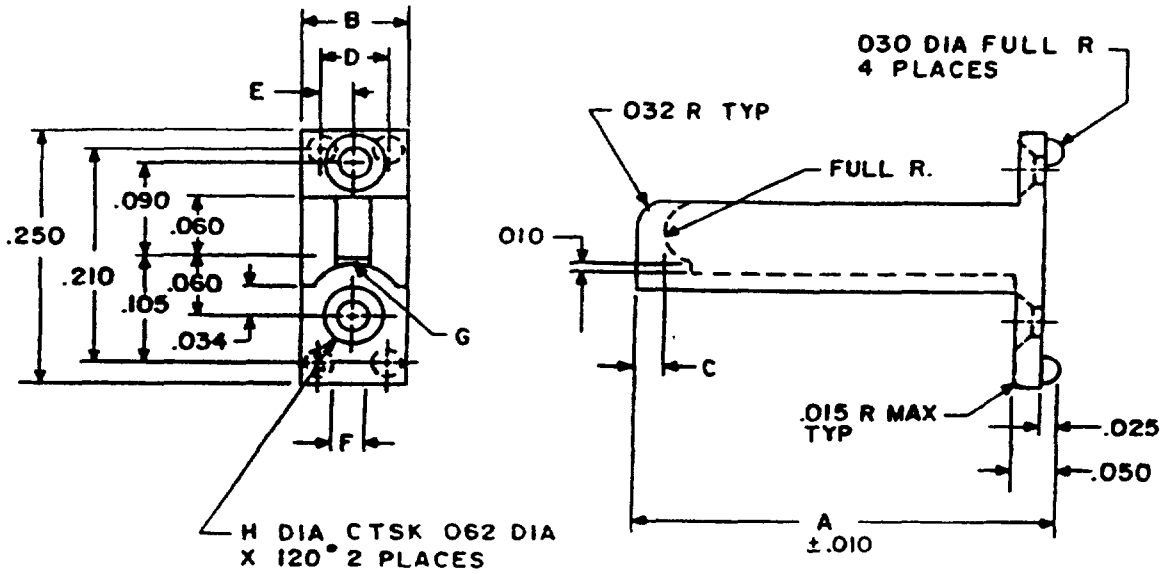


Inches	mm
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.032	0.81
.034	0.86
.040	1.02
.050	1.27
.055	1.40
.060	1.52
.062	1.57
.080	2.03
.090	2.29
100	2.54
.105	2 67
.110	2.79
.150	3.81
.210	5.33
250	6.35
.312	7 92
.437	11.10
.562	14.27

PIN A-55485/11-	Dimensions								Material
	A	B	C	D	E	F	G	H	
001	.312	.100	030	.060	.030	.030	.055R	.030	A
002	.437	100	.030	.060	.030	.030	.055R	.030	A
003	.562	.150	.040	.110	.055	.040	.080R	.040	A
004	.312	.100	.030	.060	.030	.030	.055R	.030	C
005	.437	100	.030	.060	.030	.030	.055R	.030	C
006	.562	150	.040	.110	.055	.040	.080R	040	C

NOTES.
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0 13 mm).

Figure 1. Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

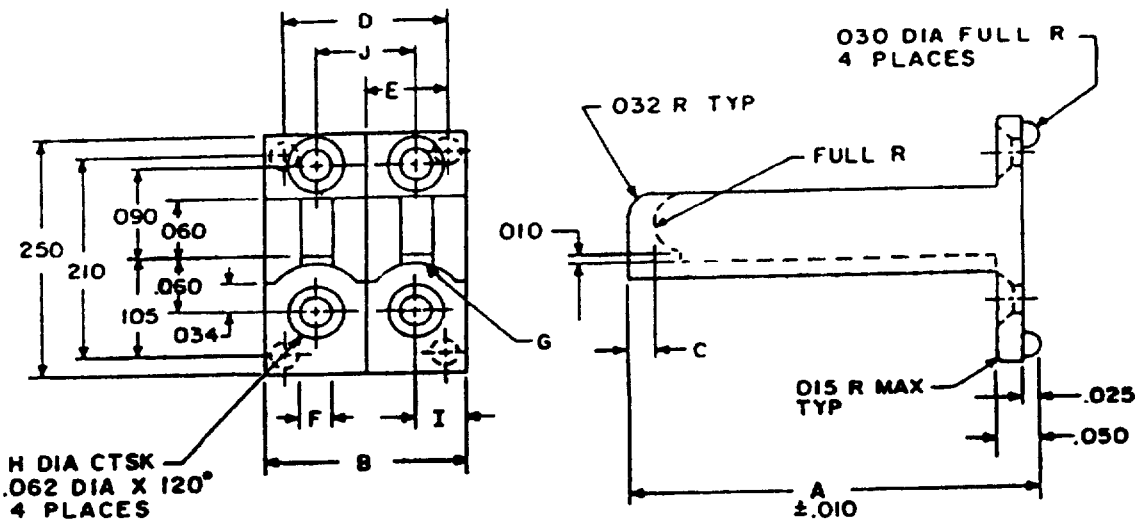


Inches	mm
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.032	0.81
.034	0.86
.040	1.02
.050	1.27
.055	1 40
.060	1.52
.062	1.57
.075	1.91
.080	2.03
.090	2.29
.100	2.54
.105	2.67
.130	3.30
.150	3.81
.160	4.07
.200	5.08
.210	5.33
.250	6.35
.260	6.60
.300	7.62
.312	7.92
.437	11.10
.562	14.27

PIN A-55485/11-	Dimensions										Material
	A	B	C	D	E	F	G	H	I	J	
007	.312	.200	.030	.160	.080	.030	.055R Typ	.030	.050	.100	A
008	.437	.200	.030	.160	.080	.030	.055R Typ	.030	.050	.100	A
009	.562	.300	.040	.260	.130	.040	.080R Typ	.040	.075	.150	A
010	.312	.200	.030	.160	.080	.030	.055R Typ	.030	.050	.100	C
011	.437	.200	.030	.160	.080	.030	.055R Typ	.030	.050	.100	C
012	.562	.300	.040	.260	.130	.040	.080R Typ	.040	.075	.150	C

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm)

Figure 1. Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

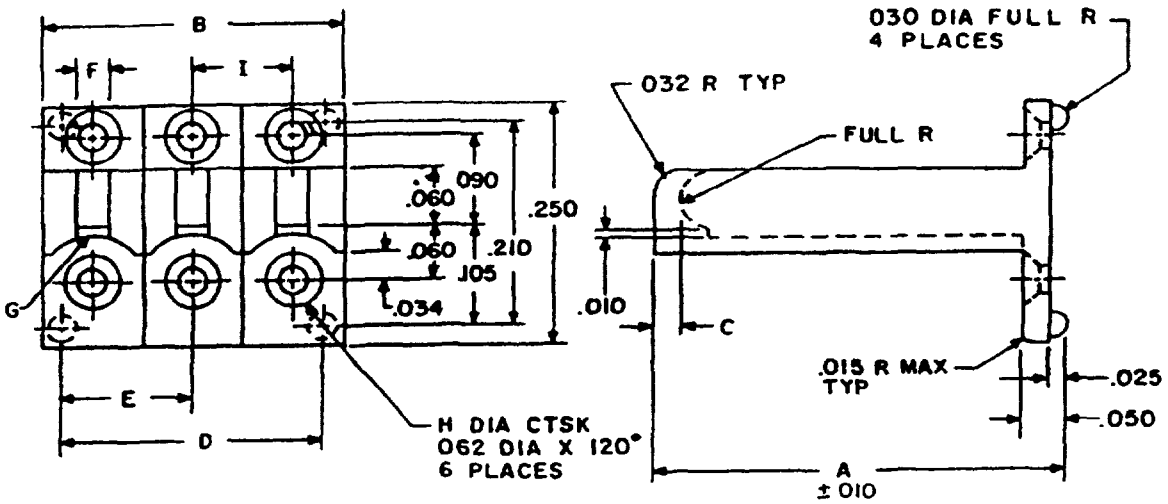


Inches	mm
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.032	0.81
.034	0.86
.040	1.02
.050	1.27
.055	1.40
.060	1.52
.062	1.57
.080	2.03
.090	2.29
.100	2.54
.105	2.67
.130	3.30
.150	3.81
.205	5.21
.210	5.33
.250	6.35
.260	6.60
.300	7.62
.312	7.92
.410	10.41
.437	11 10
.450	11.43
.562	14.27


PIN A-55485/11-	Dimensions									Material
	A	B	C	D	E	F	G	H	I	
013	.312	.300	.030	.260	.130	.030	.055R	.030	.100	A
014	.437	.300	.030	.260	.130	.030	.055R	.030	.100	A
015	.562	.450	.040	.410	.205	.040	.080R	040	.150	A
016	.312	.300	.030	.260	.130	.030	.055R	.030	.100	C
017	.437	.300	.030	.260	.130	.030	.055R	.030	100	C
018	.562	.450	.040	.410	.205	.040	.080R	.040	.150	C

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

Figure 1. Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

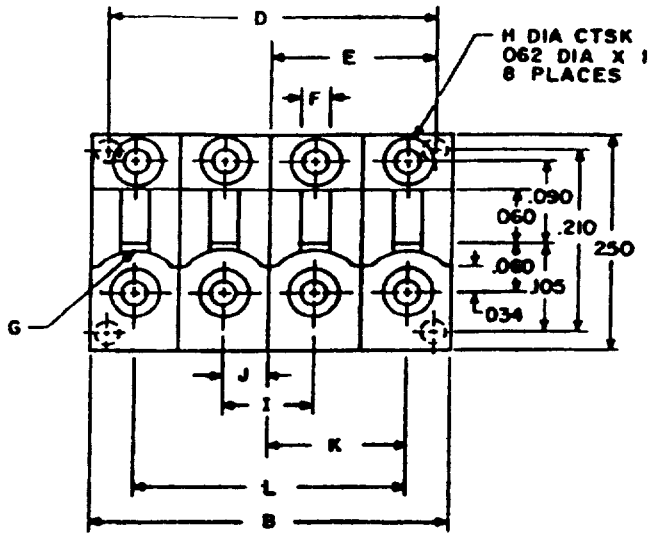

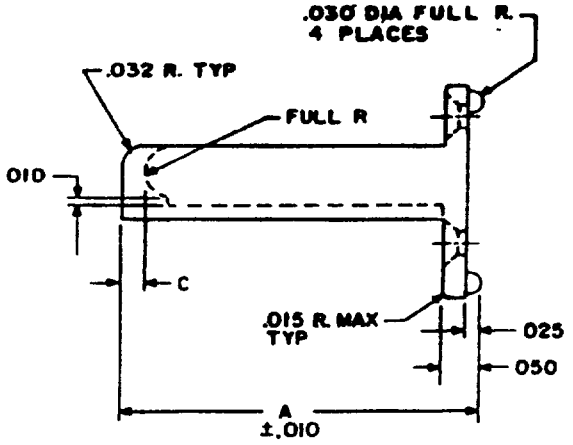

Inches	mm
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.032	0.81
.034	0.86
.040	1.02
.050	1.27
.055	1.40
.060	1.52
.062	1.57
.075	1.91
.080	2.03
.090	2.29
.100	2.54
.105	2.67
.150	3.81
.180	4.57
.210	5.33
.225	5 72
.250	6.35
.280	7.11
.300	7.62
.312	7.92
360	9.14
.400	10.16
437	11.10
.450	11.43
.560	14.22
.562	14.27
600	15.24

PIN A-55485/11-	Dimensions												Material
	A	B	C	D	E	F	G	H	I	J	K	L	
019	.312	.400	.030	.360	.180	.030	.055R	.030	.100	.050	.150	.300	A
020	.437	.400	.030	.360	.180	.030	.055R	.030	.100	050	.150	.300	A
021	.562	.600	.040	.560	.280	.040	.080R	.040	.150	.075	.225	.450	A
022	.312	.400	.030	.360	.180	.030	.055R	.030	.100	.050	.150	.300	C
023	.437	.400	.030	.360	.180	.030	.055R	.030	.100	050	.150	.300	C
024	.562	.600	.040	.560	.280	.040	.080R	.040	.150	.075	.225	450	C

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

Figure 1 Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply. 1/

CID PIN (see figure 1) A-55485/11-	Vendor commercial PIN 2/					
	CAGE code 21071	CAGE code 32559	CAGE code 53174	CAGE code 54355	CAGE code	CAGE code
001						
002	10880-4			965-702A		
003						
004	10904-3	3121-004	AP-9004/C	965-703C		
005		4371-005	AP-9005/C	965-701C		
006		5621-006	AP-9006/C	965-724C		
007						
008						
009						
010		3122-010	AP-9010/C	965-708C		
011		4372-011	AP-9011/C	965-706C		
012		5622-012	AP-9012/C	965-704C		
013						
014						
015						
016		3123-016	AP-9016/C	965-720C		
017		4373-017	AP-9017/C	965-741C		
018		5623-018	AP-9018/C	965-743C		
020						
021						
022		3124-022	AP-9022/C	965-726C		
023		4374-023	AP-9023/C	965-729C		
024		5624-024	AP-9024/C	965-710C		

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DESC-EMM, however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID.

2/ Vendor commercial PIN's are given for reference only. Do not use these numbers for ordering purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

Vendor CAGE number	Vendor name and address
21071	Globe Plastics, Incorporated 13477 Twelfth Street Chino, CA 91710-9998 (909) 464-1520
32559	Bivar, Incorporated 4 Thomas Irvine, CA 92718-2512 (714) 951-8808
53174	APX Plastics Company 3407 Dalworth Street Arlington, TX 76011-6815 (817) 275-3883
54355	Accessories for Electronics, Incorporated 800 Merrick Road Baldwin, NY 11510-3593 (516) 546-1751

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information. 1/

Superseded (old) PIN in accordance with MIL-M-38527/11: M38527/11-	Superseding (new) CID PIN A-55485/11-
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013
014	014
015	015
016	016
017	017
018	018
019	019
020	020
021	021
022	022
023	023
024	024

1/ Complete PIN shall include a suffix letter to denote material.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5999-0313-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.