This military standard has been approved by the Department of the Air Force and is for use by that activity. All other military activities are required to employ this standard where suitable.

AMSC N/A (LIMITED COORDINATION)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-F319-03

P.A. AF-85
Other Cust

International interest

Procurement Specification
MIL-C-38999

SUPERSEDES:

TITLE
CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNTING FLANGE, SOLDER TYPE, HERMETIC SEAL, SERIES II.


MILITARY STANDARD

MS27482 (USAF)

SHEET 1 OF 2

FED. SUP CLASS
5935

CANCELED
FOR PROCUREMENT
USE MS27475

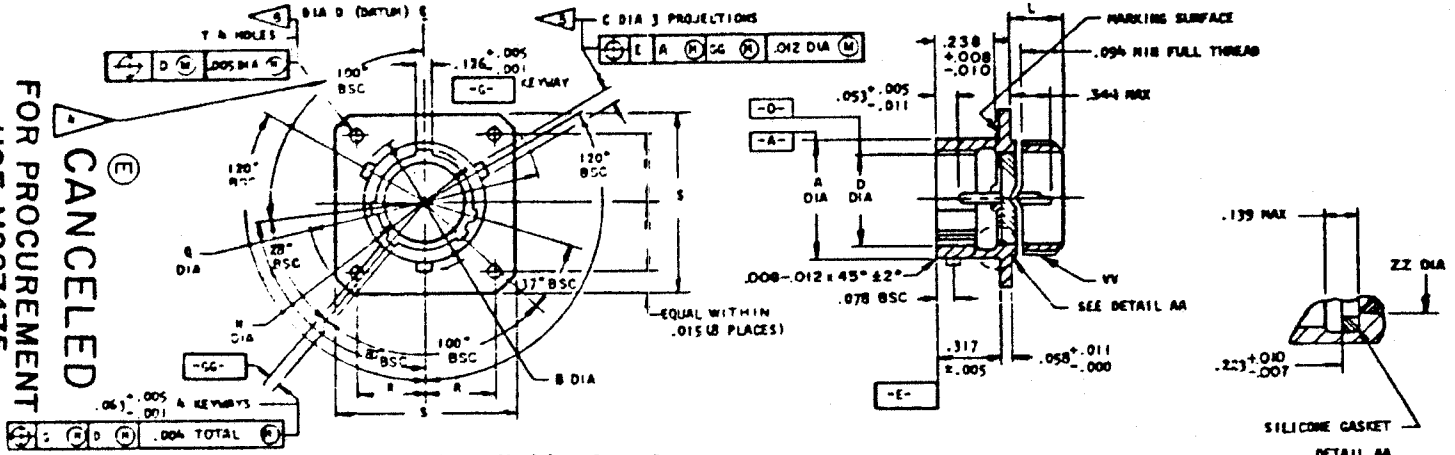

CLASS T STYLE P FINISH E

SHELL SIZE	A +.001 -.005 DIA	B +.000 -.016 DIA OVER PROJ	C +.006 -.002 DIA	D +.005 -.001 DIA	L MAX	N +.005 -.005 DIA	Q MAX DIA	R BSC	S MAX	T +.010 -.005	CC		VV THREAD CLASS 2A UNEF	ZZ MIN DIA	FOR INSERT ARR. SEE DWG MS
8	.473	.561	.078	.362	.250	.412	1.078	.297	.828	.120	.004		9/16-24	.403	27343, 27516
10	.598	.686		.487		.540	1.266	.3595	.954		.010		11/16-24	.515	27344, 27517
12	.750	.850		.607		.689	1.391	.406	1.047				13/16-20	.629	27345, 27518
14	.875	.944		.732		.814	1.516	.453	1.141				15/16-20	.754	27346, 27519
16	1.000	1.108		.857		.939	1.641	.4845	1.234				1 1/16-18	.879	27347, 27520
18	1.125	1.237		.962		1.039	1.766	.531	1.328				1 3/16-18	.980	27348, 27521
20	1.250	1.358	.125	1.087		1.164	1.891	.578	1.453				1 5/16-18	1.105	27349, 27522
22	1.375	1.483		1.212	.375	1.289	2.016	.625	1.579				1 7/16-18	1.230	27350, 27523
24	1.500	1.610		1.337		1.414	2.204	.6875	1.793	.147			1 9/16-18	1.355	27351, 27524

NOTES:
1. DIMENSIONS IN INCHES.
2. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T.I.R.
3. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER B, SHALL BE CONCENTRIC AT MMC.
4. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE FIGURE 6 OF PROCUREMENT SPECIFICATION.
5. THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION.
6. THE GAGE FEATURES FOR GG SHALL BE DIO SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION.

EXAMPLE OF PART NUMBER:
MS27482 Y 24 E 61 P A

MS NO.	CLASS	SHELL SIZE	FINISH (COLOR)	INSERT ARR. NUMBER	STYLE (P OR S)	POLARIZATION NO LETTER REQUIRED FOR NORMAL

INACTIVE FOR NEW DESIGN AFTER 13 AUG 74

USE **MS27475**

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 8-SEPT-66 REVISED (D) 13 AUG 74 (E) 17 FEB 88

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:41Z
Check the source to verify that this is the current version before use.