
FED. SUP CLASS
5935

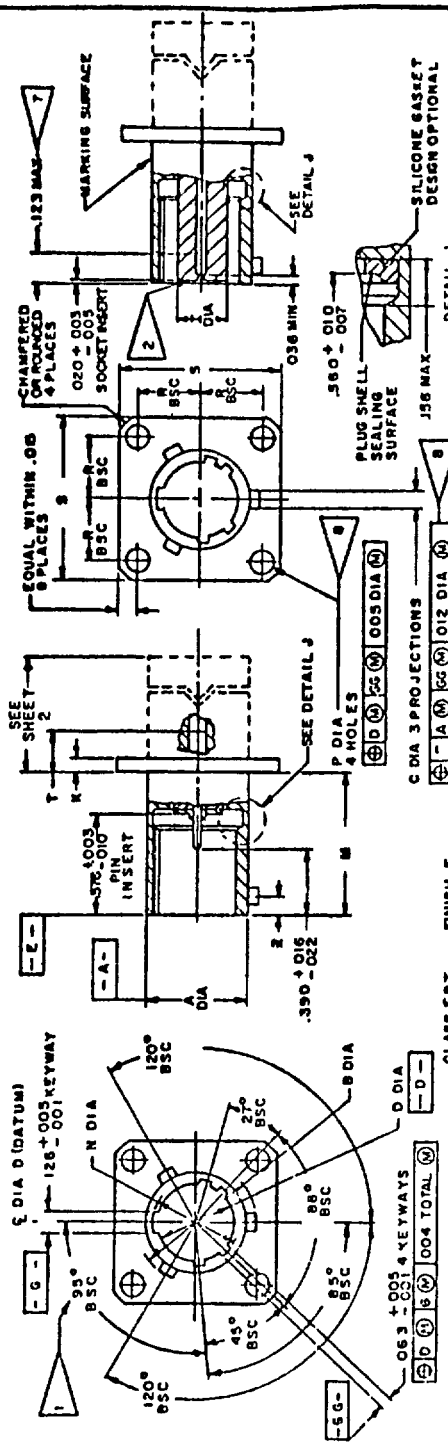

SHELL SIZE	A DIA +.001 -.005	C DIA +.006 -.002	D DIA +.005 -.001	I MAX DIA	K +.015 -.000	M +.000 -.005	N DIA +.005 -.006	P DIA +.010 -.005	R BSC	S ±.020	T MAX	2 BSC	FOR INSERT ARR SEE DWG NO
9	.572	.078	.442	.290	.085	.820	.492	1.28	.3595	.938	1.56	1.00	20049,27525
11	.700		.570	.418			.620		.406	1.031			20050,27526
13	.850		.687	.532			.769		.453	1.125			20051,27527
15	.975		.812	.657			.894		.484	1.219			20052,27528
17	1.100		.937	.782			1.019		.531	1.312			20053,27529
19	1.207		1.042	.871			1.124		.578	1.438			20054,27530
21	1.332		1.167	.996			1.249		.625	1.562			20055,27531
23	1.457		1.292	1.121			1.374		.687	1.688			20056,27532
25	1.582	.125	1.417	1.246	.115	.790	1.499	.147	.750	1.812	.188	1.09	20057,27533

CLASS E&T FINISH F

APPROVED 22 MAR 1971 REVISED (A) 7 JUL 1971 (C) 20 Feb 78

(C) **INACTIVE FOR NEW DESIGN** AFTER 20 Feb 78

USE MS 27656 (C) Denotes Changes

P A AF-85	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BACK PANEL WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS27654
Other Cust. Army EL–Navy ES			
Procurement Specification MIL-C-38999		SUPERSEDES (C) MS27654A and MSC027654B(USAF)	SHEET 1 OF 3

DD FORM 1 SEP 63 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3052-6

Reviewer activities: Army AVC, Navy EC, Air Force DSA-ES 11, 15, 17, 99

User activities: Army, Navy, Air Force

This standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:47Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army AR, Navy EC, Air Force 11, 15, 17, 99, DSA-ES

User activities: Army, Navy, Air Force

DD FORM 1 SEP 63 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PA AF-85

Other Cust. - Army EL-Navy ES

International interest

Procurement Specification MIL-C-38999

SUPERSEDES (C) MS27654A & MS0027654B(USAF)

TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BACK PANEL WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I


MILITARY STANDARD

MS 27654

SHEET 2 OF 3

FED SUP CLASS 5935

CLASSES E & T

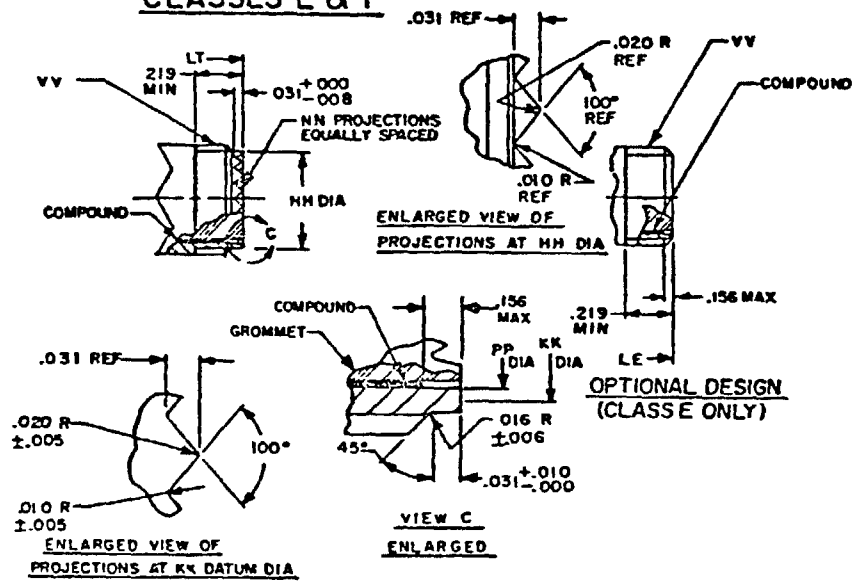


SHELL SIZE	HH DIA +.000 -.005	KK DATUM DIA	NN	PP DIA ±.003	LE MAX OVER-ALL LENGTH	LT MAX OVER-ALL LENGTH	VV THREAD CLASS 2A UNEF (PLATED)
9	.387	.366	12	.344	469	469	7/16 - 28
11	.515	.487	16	.472			9/16 - 24
13	.628	.609	20	.586			11/16 - 24
15	.754	.731	24	.711			13/16 - 20
17	.879	.853	28	.836			15/16 - 20
19	.985	.974	32	.942			1 1/16 - 18
21	1.110	1.097	36	1.067	500	500	1 3/16 - 18
23	1.235	1.218	40	1.192			1 5/16 - 18
25	1.360	1.340	44	1.317			1 7/16 - 18

APPROVED 22 MAR 1971 REVISED (A) 7 JUL 1971 (C) For Changes See pages 1, 2 & 3

Source: https://assist.dla.mil -- Downloaded: 20240-23T16:47Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

EXAMPLE OF PART NUMBER

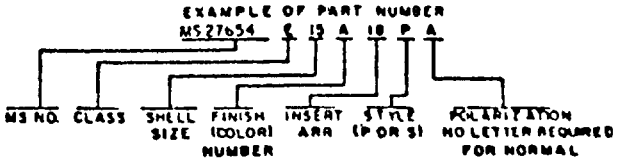

NOTES

1. NORMAL KEYWAY POSITION FOR OTHER KEYWAY POSITIONS SEE FIGURE 6 OF PROCUREMENT DOCUMENT
2. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .003 TOTAL INDICATOR READING.
3. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T I R
4. DIAMETERS D AND I SHALL BE CONCENTRIC WITHIN .005 T I R AT MMC
5. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER H, SHALL BE CONCENTRIC AT MMC
6. DIMENSIONS IN INCHES
7. THE POINT AT WHICH A GAGE PIN, HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE, TOUCHES SOCKET CONTACT SPRING.
8. THE GAGE FEATURES FOR 66 SHALL BE .010 SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.000	.00	.128	3.25	570	14 48	.850	21 59	1.207	30 66
.001	.03	.147	3 73	.572	14.53	.853	21 67	1.210	30.73
.002	.05	156	3.96	576	14.63	.871	22 12	1.218	30.94
.003	.08	188	4.78	.578	14.68	.879	22.33	1 219	30 96
.004	.10	219	5.56	.586	14 88	.894	22 71	1.235	31.37
.005	.13	.290	7.37	.609	15 47	.937	23.80	1.246	31 65
.007	.18	344	8.74	.620	15 75	938	23 83	1.249	31 72
.008	.20	.3595	9 13	.625	15 88	.942	23 93	1.292	32.82
010	.25	.366	9 30	628	15 95	.960	24 38	1.312	33 32
.012	.30	.387	9.83	.657	16 69	.974	24 74	1.317	33 45
.015	.38	.390	9.91	.662	16 81	975	24.77	1.332	33 83
.016	.41	.406	10.31	.687	17.45	.985	25 02	1.340	34.04
.020	.51	.418	10 62	.6875	17.46	.996	25.30	1.360	34.54
.022	.56	.442	11.23	.700	17.78	1 019	25.88	1.374	34 90
.031	.79	.453	11.51	711	18.06	1.031	26 19	1.417	35.99
.036	.91	.469	11.91	.734	18.64	1 042	26.47	1.438	36 53
.063	1.60	.472	11.99	.750	19 05	1.067	27.10	1.442	36.63
.078	1.98	4845	12.31	.754	19 15	1 085	27.56	1.457	37 01
.085	2.16	.487	12.37	.769	19 53	1.097	27.86	1.499	38.07
.100	2.54	.492	12.50	.782	19 86	1.100	27 94	1.562	39.67
.109	2.77	500	12 70	.790	20 07	1.110	28.19	1.567	39.80
.115	2 92	.515	13.08	810	20 57	1.121	28 47	1.582	40.18
123	3.12	531	13.49	.812	20.62	1.124	28 55	1.688	42 88
.125	3.18	.532	13.51	820	20 83	1.167	29 64	1.692	42 98
.126	3.20	.560	14.22	.836	21.23	1 192	30.28	1.812	46.02

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 22 MAR 71 REVISED (A) 7 JUL 1971 (C) For Changes See pages 1, 2 & 3

User activities: Army, Navy, Air Force

Reviewer activities: Army AR, Navy EC, Air Force 11, 15, 17, 99, DSA-ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A AF-85 Other Cust Army EL–Navy ES	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BACK PANEL WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS 27654
Procurement Specification MIL-C-38999		SUPERSEDES (C) MS27654A and MS0027654B(USAF)	SHEET 3 OF 3

DD FORM 1 SEP 63 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T16:47Z
Check the source to verify that this is the current version before use.