FED. SUP CLASS
5315

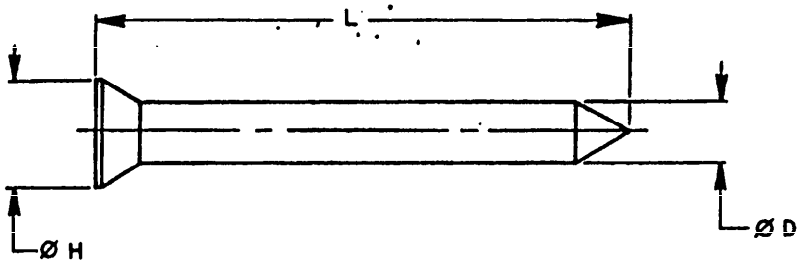


TABLE I. DASH NUMBERS AND DIMENSIONS.

SINKER NAIL					
DASH NUMBER	COMM. SIZE	L LENGTH	Ø D	Ø H	NUMBER PER LB (APPROX)
1	3d	1 1/8 ±1/16	.067 ±.002	.172 ±.017	923
2	4d	1 3/8 ±1/16	.080 ±.004	.203 ±.020	527
3	5d	1 5/8 ±1/16	.086 ±.004	.219 ±.021	387
4	6d	1 7/8 ±1/16	.092 ±.004	.234 ±.023	293
5	7d	2 1/8 ±1/16	.099 ±.004	.250 ±.025	223
6	8d	2 3/8 ±1/16	.113 ±.004	.266 ±.026	153
7	10d	2 7/8 ±3/32	.120 ±.004	.281 ±.028	111
8	12d	3 1/8 ±3/32	.135 ±.004	.312 ±.031	81
9	16d	3 1/4 ±3/32	.148 ±.004	.344 ±.034	64
10	20d	3 3/4 ±3/32	.177 ±.004	.375 ±.037	40
11	30d	4 1/4 ±3/32	.192 ±.004	.406 ±.040	30
12	40d	4 3/4 ±3/32	.207 ±.004	.438 ±.043	23
13	60d	5 3/4 ±3/32	.244 ±.004	.500 ±.050	14

REQUIREMENTS:

1. MATERIAL: NAIL TYPE II, STYLE 8 SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.
2. CHARACTERISTICS. NAIL SHALL HAVE FLAT COUNTERSUNK HEAD, ALTERED OR T-HEAD (FOR USE WITH MECHANICAL DRIVERS) WHEN SPECIFIED, DIAMOND POINT, ROUND SMOOTH SHANK IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
3. PROTECTIVE COATING AND SURFACE TREATMENT. NAIL SHALL BE CEMENT COATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
4. SHANK DIAMETERS. TOLERANCES ON SHANK DIAMETERS SHALL BE ±.004 INCH FOR DIAMETERS .076 INCH AND LARGER; AND ±.002 INCH FOR DIAMETERS SMALLER THAN .076 INCH. TOLERANCE SHALL APPLY BEFORE APPLICATION OF PROTECTIVE COATINGS AND FINISHES.

REVIEWER ACTIVITIES: CIVIL AGENCIES COORDINATING ACTIVITIES:USER ACTIVITIES:
ARMY- CE,GL,ME GSA-FSS ARMY- AV, MI
NAVY- MC, SA NAVY- AS, SH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 28 OCT 86 REVISED

P. A. ARMY-AR Other Cust NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE NAIL, SINKER	MILITARY STANDARD MS 51541
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES:		PAGE 1 OF 2

AMSC N/A DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315-0398

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:06Z
Check the source to verify that this is the current version before use.

5. LENGTHS. TOLERANCES ON LENGTHS SHALL BE +1/32 INCH FOR LENGTHS UP TO AND INCLUDING 1 INCH; +1/16 INCH FOR LENGTHS OVER 1 INCH UP TO AND INCLUDING 2 1/2 INCHES; +3/32 INCH FOR LENGTHS OVER 2 1/2 INCHES UP TO AND INCLUDING 7 INCHES AND +1/8 INCH FOR LENGTHS OVER 7 INCHES.


6. HEAD DIAMETERS.

A. HAND DRIVEN. THE DIFFERENCE IN DIAMETERS ACROSS THE LONG AXIS SHALL NOT EXCEED THAT ACROSS THE SHORT AXIS BY MORE THAN 10 PERCENT. HEADS WILL BE WELL CENTERED.

B. MECHANICALLY DRIVEN. TOLERANCES ON HEAD DIAMETERS OF MECHANICALLY DRIVEN NAILS SHALL COMPLY WITH MANUFACTURER'S SPECIFICATIONS AND SHALL BE SUITABLE FOR USE IN THE MAKE AND MODEL OF GUN SPECIFIED.

7. PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, PLUS THE DASH NUMBER FROM TABLE I.

EXAMPLE: MS51541-7



MS51541-7 INDICATES - NAIL, SINKER, 10d COMMERCIAL SIZE, .120 SHANK DIAMETER, .281 HEAD DIAMETER, 2 7/8 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

REVIEWER ACTIVITIES: CIVIL AGENCIES COORDINATING ACTIVITIES: USER ACTIVITIES:
ARMY-CE,GL,ME GSA-FSS ARMY-AV,MI
NAVY-MC,SA NAVY-AS,SH

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 28 OCT 86 REVISED

P. A. ARMY-AR Other Cust NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE NAIL, SINKER	MILITARY STANDARD MS51541
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:06Z
Check the source to verify that this is the current version before use.