
MILITARY SPECIFICATION SHEET


CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (PLUG-FLARELESS TUBE END), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plugs described herein shall consist of this specification and the latest issue of MIL-C-5501.

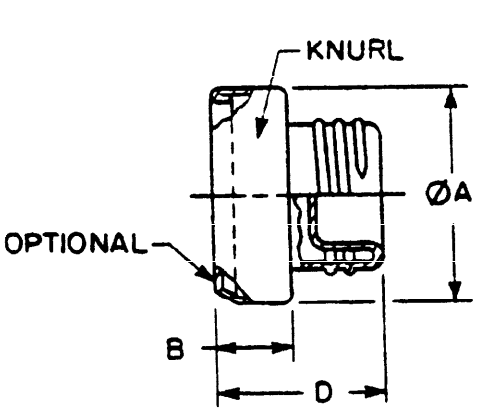

ALUMINUM ALLOY PLUG

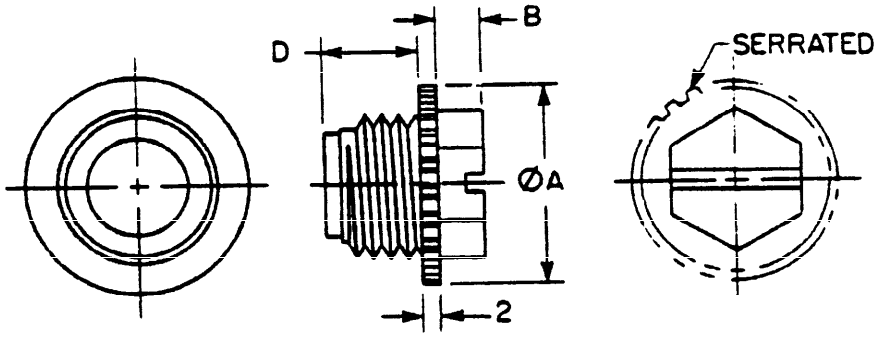

RIGID PLASTIC PLUG

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL, (PLUG-FLARELESS TUBE END), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Aluminum alloy 3003 and rigid plastic (see general specification).


Z

2. Protective coating: Aluminum alloy shall be chemically treated in accordance with MIL-C-5541, Class 1A

3. Threads: Standard fine pitch "M" profile tolerance class 6g, in accordance with FED-STD-H28/21. Acceptability of screw threads shall be in accordance with FED-STD-H28/20, system 21.

4. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from TABLE I or TABLE II.

EXAMPLE: D5501/19-2

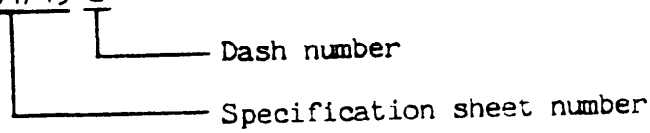

D5501/19-2 indicates - Caps and Plugs, Protective, Dust and Moisture Seal (Plug-Flareless Tube End), Metric; Aluminum alloy plug; Thread M8 X 1.25.

D5501/19-R2 indicates - Rigid plastic plug; Thread M8 X 1.25.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:56Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (ALUMINUM ALLOY PLUGS)

DASH NUMBER	THREAD	ØA ±1.0	B ±0.5	D ±0.5
2	M8 x 1.25	11.5	7	17
3	M10 x 1.25	13	7	18
4	M11 x 1	17	7	18
5	M14 x 1.50	18	7	19
8	M20 x 1.5	25.5	8	20
10	M22 x 1.5	29	8	24.5
12	M27 x 2	33	8	25.5
16	M33 x 2	39	7	25.5
20	M42 x 2	49	13	26
24	M48 x 2	57	14	31
28	M58 x 2	66.5	14	32.5
32	M64 x 2	72	14	33

TABLE II. DASH NUMBERS AND DIMENSIONS (RIGID PLASTIC PLUGS)

DASH NUMBER	THREAD	ØA ±1.0	B ±0.5	D ±0.5
R2	M8 x 1.25	16	7	8
R3	M10 x 1.25	16	7	8
R4	M11 x 1	16	7	8
R5	M14 x 1.5	16	7	8
R8	M20 x 1.5	26	8	12
R10	M22 x 1.5	26	8	12
R12	M27 x 2	33	8	16

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:56Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1757)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:56Z
Check the source to verify that this is the current version before use.