
METRIC
MIL-C-5501/21
30 June 1989

MILITARY SPECIFICATION SHEET

CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL
(CAP-BEADED HOSE CONNECTION), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the caps described herein shall consist of this specification and the latest issue of MIL-C-5501.

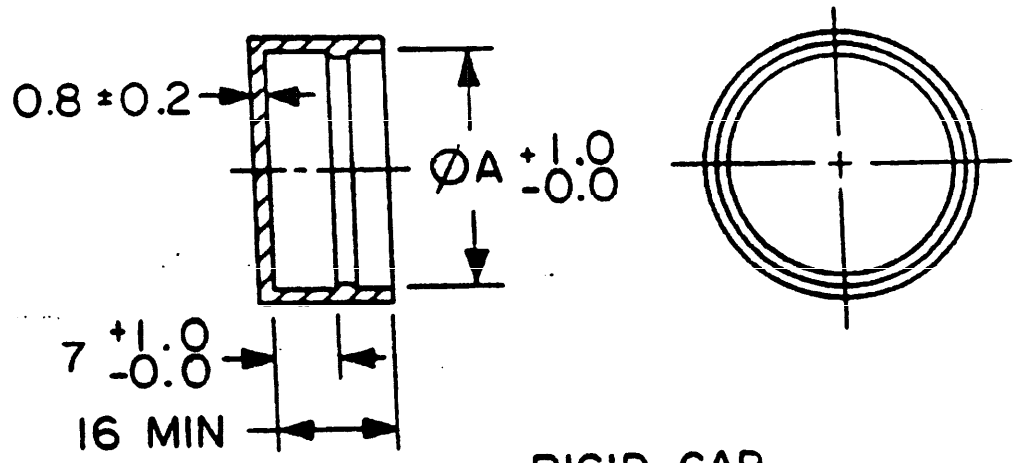

RIGID CAP

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (CAP-BEADED HOSE CONNECTION), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Rigid plastic (see general specification)

2. Sealing pressure: The sealing pressure requirements of the general specification does not apply to these caps.

3. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from Table I.

EXAMPLE: D5501/21R4

D5501/21R4 Indicates - Caps and Plugs, Protective, Dust and Moisture Seal (Cap-Beaded Hose Connection), Metric; Rigid Plastic Cap; Diameter 6.

TABLE I. DASH NUMBERS AND DIMENSIONS (PLASTIC CAPS)

DASH NUMBER	ØA	DASH NUMBER	ØA	DASH NUMBER	ØA
R4	6	R12	20	R28	45
R6	10	R16	25	R32	50
R8	12	R20	32	R40	63
R10	16	R24	38	R48	70

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1759)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.