
METRIC
MIL-C-5501/23
30 June 1989

MILITARY SPECIFICATION SHEET

CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL
(CAP-PIPE THREAD), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the caps described herein shall consist of this specification and the latest issue of MIL-C-5501.

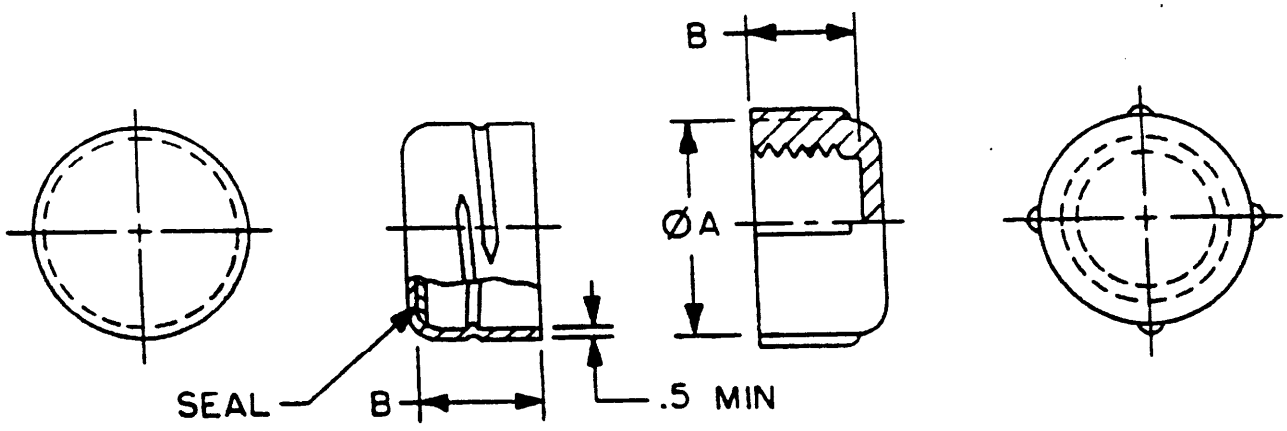

ALUMINUM ALLOY PLASTIC

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (CAP-PIPE THREAD), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Aluminum Alloy 3003, flexible plastic and neoprene seal (see general specification).

2. Protective coating: Aluminum alloy shall be chemically treated in accordance with MIL-C-5541, Class 1A

3. Threads: Capable of mating with threads in accordance with ISO7/1.

4. Part number code letter:

   "G" After dash number - Aluminum alloy cap with neoprene seal.

5. These caps shall be suitable for use with external taper pipe threads.

6. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from Table I and a code letter after the dash number when applicable.

EXAMPLE: D5501/23-2



D5501/23-2 Indicates - Caps and Plugs, Protective, Dust and Moisture Seal (Cap-Pipe Thread), Metric; Aluminum Alloy Cap; Thread 1/8-28.

D5501/23-2G Indicates - Same as above except code letter "G" indicates Aluminum Alloy Cap with Neoprene Seal; Thread 1/8-28.

D5501/23-F2 indicates - Flexible plastic cap; Thread 1/8-28.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (ALUMINUM AND PLASTIC CAPS)

DASH NUMBER		THREAD	A ±0.5	B MAX
ALUMINUM ALLOY	PLASTIC			
2	F2	1/8-28	14	10
4	F4	1/4-19	17	10
6	F6	3/8-19	21	11
8	F8	1/2-14	27	13
12	F12	3/4-14	32	14
16	F16	1-11	38	19
20	F20	1 1/4-11	46	19
24	F24	1 1/2-11	52	19

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1761)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.