
METRIC
MIL-C-5501/24
30 June 1989

MILITARY SPECIFICATION SHEET

CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL
(CAP-PLUG, GENERAL PURPOSE), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the caps-plugs described herein shall consist of this specification and the latest issue of MIL-C-5501.

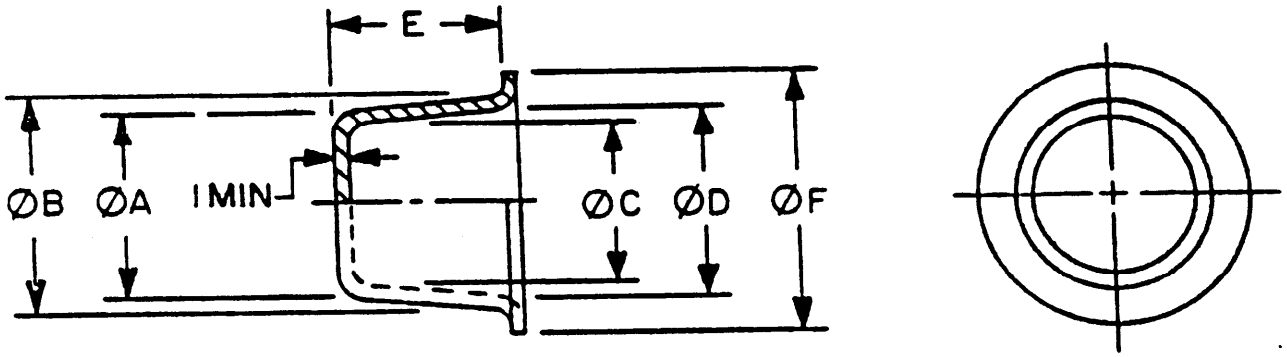

CAP PLUG

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL, (CAP-PLUG, GENERAL PURPOSE), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


1. Material: Flexible plastic (see general specification).

2. When plugging, "B" dimensions should be at least .5mm larger than the hole to be plugged.

   When capping, "C" dimension should be at least 1% smaller than the diameter to be capped. Minimum of .5mm.

3. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from TABLE I.

EXAMPLE: D5501/24F1



D5501/24F1 indicates - Caps and Plugs, Protective Dust and Moisture Seal (Cap-Plug, General Purpose), Metric; Plug and Cap Dimensions from TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.(PLASTIC CAPS AND PLUGS)

DASH NUMBER	ØA PLUG MINOR ±0.5	ØB PLUG MAJOR ±0.5	ØC CAP MINOR ±0.5	ØD CAP MAJOR ±0.5	E HEIGHT ±0.5	ØF FLANGE ±0.5
F1	3.0	4.6	1.4	3.1	9.5	7.9
F2	4.4	6.1	2.8	4.5	9.5	9.5
F3	6.0	7.7	4.4	6.1	9.5	11.9
F4	7.6	9.3	6.0	7.7	9.5	13.5
F5	8.4	10.1	6.8	8.5	9.5	14.3
F6	9.2	10.9	7.6	9.3	9.5	15.1
F7	9.9	11.6	8.3	10.0	9.5	15.8
F8	10.7	12.3	9.0	10.7	9.5	15.8
F9	11.4	13.0	9.8	11.5	9.5	16.7
F10	12.0	13.9	10.4	12.3	11.1	18.3
F11	13.5	15.5	11.9	14.0	11.1	19.1
F12	14.0	16.0	12.4	14.4	12.7	19.9
F13	14.7	17.0	13.2	15.4	12.7	21.4
F14	16.3	18.5	14.7	16.9	12.7	22.2
F15	17.2	19.2	15.6	17.6	12.7	22.2
F16	17.5	20.0	16.0	18.4	14.3	23.8
F17	18.4	20.9	16.9	19.3	14.3	24.6
F18	19.1	21.5	17.5	19.9	14.3	26.2
F19	20.4	23.1	18.8	21.6	15.6	27.8
F20	22.0	24.8	20.4	23.2	15.6	28.4
F21	23.2	26.4	21.2	24.4	17.5	29.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.(PLASTIC CAPS AND PLUGS) - CONTINUED

DASH NUMBER	ØA PLUG MINOR ±0.5	ØB PLUG MAJOR ±0.5	ØC CAP MINOR ±0.5	ØD CAP MAJOR ±0.5	E HEIGHT ±0.5	ØF FLANGE ±0.5
F22	24.5	27.7	22.9	26.1	19.0	32.5
F23	27.8	30.9	26.2	29.3	19.0	35.7
F24	29.9	32.6	28.3	31.0	19.0	36.5
F25	31.1	34.4	29.5	32.8	19.0	38.1
F26	33.3	37.2	31.7	35.6	22.2	41.1
F27	36.8	40.6	35.2	39.0	22.2	44.5
F28	39.6	42.7	38.1	41.2	19.0	47.7
F29	44.5	47.8	42.9	46.2	19.0	51.6
F30	45.2	49.5	43.6	48.0	25.4	53.8
F31	48.3	52.7	46.7	51.1	25.4	57.2
F33	38.4	40.6	36.9	39.0	12.7	45.2
F34	45.5	46.0	44.1	44.8	9.7	50.8
F39	52.5	57.0	50.9	55.4	25.4	62.0
F40	54.3	58.7	52.7	57.2	25.4	65.0
F41	56.6	57.4	55.1	55.8	12.7	63.5
F43	58.4	62.6	56.8	61.0	25.4	67.5
F44	60.8	66.1	59.3	64.5	28.4	72.1
F48	67.1	70.9	65.5	69.3	19.0	75.5
F49	69.1	76.0	67.5	74.2	25.4	79.2
F50	72.4	75.7	70.8	74.1	19.0	82.6
F51	75.8	80.2	74.0	78.2	19.0	86.6
F54	84.5	87.8	82.4	85.8	19.0	93.7
F55	82.6	90.5	80.2	88.7	28.4	95.3

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1762)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.