MILITARY SPECIFICATION SHEET

# CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (PLUG-PIPE THREAD)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the plugs described herein shall consist of this document and the latest issue of specification MIL-C-5501.

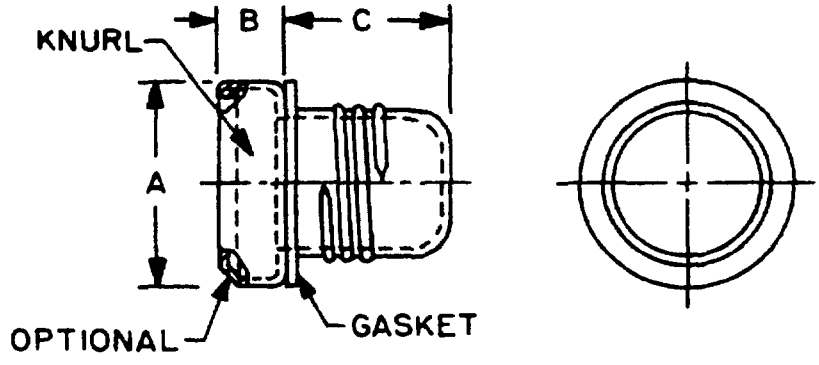


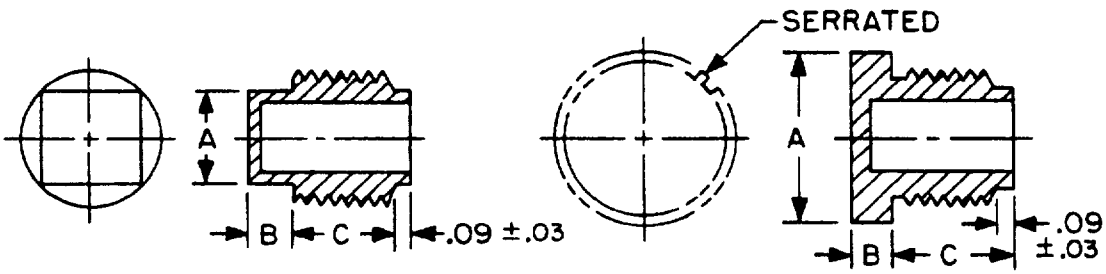

TABLE I - ALUMINUM ALLOY

| DASH NO. | THREAD (NPT) | A ±.04 | B ±.03 | C ±.03 |
|---|---|---|---|---|
| 2 | 1/8-27 | .72 | .25 | .28 |
| 4 | 1/4-18 | .84 | .25 | .38 |
| 6 | 3/8-18 | .97 | .31 | .41 |
| 8 | 1/2-14 | 1.22 | .31 | .50 |
| 12 | 3/4-14 | 1.47 | .38 | .53 |
| 16 | 1 -11-1/2 | 1.72 | .38 | .66 |
| 20 | 1-1/4-11-1/2 | 1.97 | .50 | .69 |
| 24 | 1-1/2-11-1/2 | 2.22 | .50 | .69 |



FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:55Z
Check the source to verify that this is the current version before use.




SQUARE HEAD ROUND HEAD

TABLE II - RIGID PLASTIC

| DASH NO. | THREAD (NPT) | SQUARE HEAD | | | ROUND HEAD | | |
|---|---|---|---|---|---|---|---|
| | | A ±.03 | B ±.03 | C ±.03 | A-DIA ±.03 | B ±.03 | C ±.03 |
| R2 | 1/8-27 | .28 | .25 | .31 | .56 | .25 | .31 |
| R4 | 1/4-18 | .38 | .25 | .38 | .75 | .25 | .31 |
| R6 | 3/8-18 | .44 | .25 | .44 | .88 | .25 | .34 |
| R8 | 1/2-14 | .56 | .25 | .50 | 1.12 | .38 | .56 |
| R12 | 3/4-14 | .62 | .25 | .56 | 1.31 | .41 | .62 |
| R16 | 1 -11-1/2 | .88 | .25 | .62 | 1.62 | .56 | .75 |
| R20 | 1-1/4-11-1/2 | 1.00 | .38 | .88 | | | |
| R24 | 1-1/2-11-1/2 | 1.25 | .38 | .88 | | | |

REQUIREMENTS:

1. Material - Aluminum alloy (3003-0) and rigid plastic. The gasket shall be neoprene.
2. Protective Coating - Aluminum alloy shall be chemically treated per MIL-C-5541, Class 1A.
3. Dimensions - All dimensions are in inches.
4. The part number consists of M5501/5 and a dash number taken from Table I or II. Example: M5501/5-2.
   For aluminum alloy plug with neoprene gasket, add "G" after the dash number. Example: M5501/5-2G.
5. Plugs covered by the dash numbers in Table I and II supersede the Type V plugs of MIL-C-5501E.
6. Plugs covered by the dash numbers in Table II supersede the Type II, Form B, Class 1, Style a thru e plugs of MIL-C-52078. (See Table III.)
7. These plugs shall be suitable for use with internal taper pipe threads.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:55Z
Check the source to verify that this is the current version before use.

TABLE III

Cross-reference between plugs covered by MIL-C-5501/5 and the cancelled plugs covered by MIL-C-52078, Type II, Form B, Class 1, Style (see below).

| DASH NO. | SIZE | | | | |
|---|---|---|---|---|---|
| MIL-C-5501/5 | Style a | Style b | Style c | Style d | Style e |
| R2 | 1 | 1 | 1 | | |
| R4 | 2 | 2 | 2 | 1 | |
| R6 | 3 | | 3 | 2 | |
| R8 | 4 | | 4 | 3 | 1 |
| R12 | 5 | | | 4 | 2 |
| R16 | 6 | | | 5 | 3 |
| R20 | 7,8 | | | 6 | |
| R24 | 9 | | | 7 | |
| ** | 10 | | | | |

** No replacement

Custodians:
Army - WC
Navy - AS
Air Force - 82

Reviewer Activities:
Army - AV, EL, GL, MU
Navy - None
Air Force - None
DSA - IS

Preparing Activity:
Army - WC

Project No. 5340-0941

User Activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD
Air Force - None



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:55Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS. This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENT ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO (If "yes" in what way?)

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity - Optional) | DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
HEADQUARTERS
U. S. ARMY WEAPONS COMMAND
ROCK ISLAND, ILLINOIS 61201

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300



POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commander
Rock Island Arsenal
Weapons Laboratory
ATTN: SWERR-E-SC
Rock Island, Illinois 61201

FOLD

To detach this form, cut along this line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:55Z
Check the source to verify that this is the current version before use.