Z-2875

This standard reflects the agreement of the Army, the Navy, and Air Force to limit the design of power type square drive sockets and attachments to be procured for stock in the supply systems of the respective Military Departments, to those shown hereon.

FED. SUP CLASS
3460

Ⓐ CANCELED AFTER 22 NOVEMBER 1967
USE TABLE III OF GGG-W-660

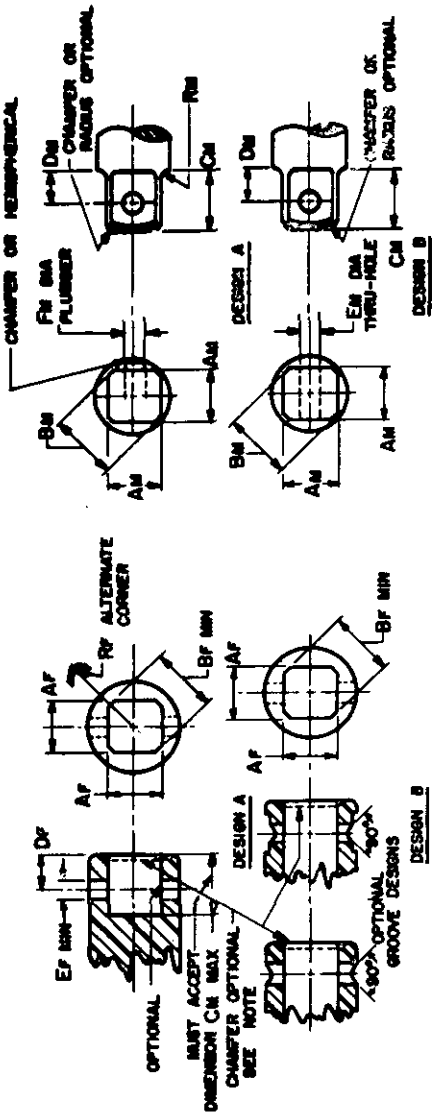

DRIVE SIZE	Design	FEMALE END Af MAX.	Af MIN.	Bf MIN.	Df MAX.	Ef MIN.	Rf MAX.	Minimum clearance across flats male to female	MALE END Design	Am MAX.	Am MIN.	Bm MAX.	Cm MIN.	Dm MAX.	Em MIN.	Fm MAX.	Rm MAX.	DRIVE SIZE
INCHES		INCHES	INCHES	INCHES	INCH	INCH	INCH	INCH		INCHES	INCHES	INCHES	INCHES	INCH	INCH	INCH	INCH	INCHES
1/4	A	.256	.253	.335	.199	.147	.090	.001	A	.252	.247	.330	.312	.185	.153	.078	.035	1/4
3/8	A	.383	.378	.506	.221	.208	.170	.003	A	.377	.372	.500	.438	.227	.230	.156	.08	3/8
1/2	A	.509	.503	.670	.315	.303	.201	.001	A	.502	.497	.665	.625	.321	.306	.187	.031	1/2
5/8	A	.633	.628	.839	.315	.303	.201	.003	A	.627	.622	.834	.656	.321	.306	.187	.047	5/8
3/4	B	.756	.753	1.006	.406	.397	.216	.001	B	.752	.747	1.000	.938	.445	.760	.250	.047	3/4
1	B	1.009	1.004	1.340	.596	.584	.234	.002	B	1.002	.997	1.340	1.125	.601	1.000	.250	.063	1
1 1/2	B	1.510	1.505	1.993	.847	.838	.340	.002	B	1.503	1.498	1.988	1.625	.853	1.562	.390	.094	1 1/2

NOTE: Incorporating fillet radius (Rm) at shoulder of male tang precludes use of minimum diameter cross-hole in socket (Ef), unless female drive end is chamfered (shown as option). If female drive end is not chamfered, socket cross-hole diameter (Ef) shall be increased to compensate for fillet radius Rm (max).

(PROJECT 3460-0050)

APPROVED 7 MAR 1965 REVISED Ⓐ 22 NOVEMBER 1967

CUSTODIANS	OTHER INT.
Ord Ships AF	A - CEC N - AMC AF -

MILITARY STANDARD

SQUARE DRIVE END STANDARDS, POWER TYPE (MALE AND FEMALE)

(FOR USE WITH SQUARE DRIVE SOCKET WRENCHES AND ATTACHMENTS)

MS15775

PROCUREMENT SPECIFICATION
GGG-W-660

SUPERSEDING:

SHEET 1 OF 1

DD FORM 1673-1

☆ U.S. GOVERNMENT PRINTING OFFICE: 1967-301-514/2875

Source: https://assist.dla.mil -- Downloaded: 20260-23113:51Z
Check the source to verify that this is the current version before use.