FED. SUP CLASS
6210

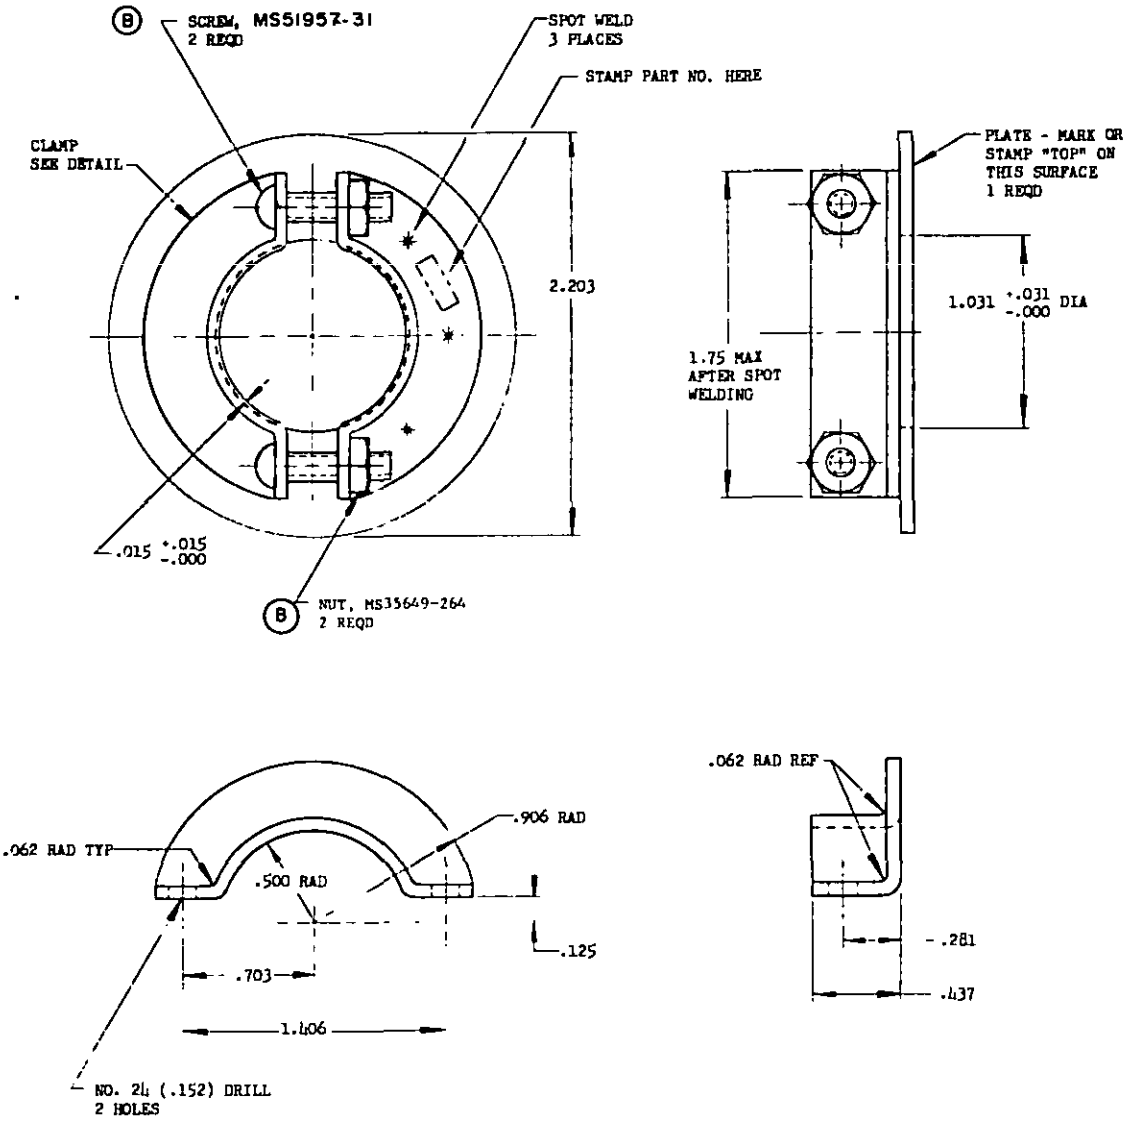

CLAMP
2 REQD PER ASSY

(B) MATERIAL: ALUMINUM ALLOY, QQ-A-250/8. TEMPER H24, THICKNESS .064.

ANODIC COATINGS, MIL-A-8625, TYPE I.

BREAK ALL SHARP EDGES .010 MAX.

CHECK TO SEE THAT CLAMP ACCOMMODATES 1 INCH DIAMETER PLUG, AND PLATE DOES NOT CUT INTO PLUG WHEN CLAMP IS TIGHTENED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

STANDARD REDRAWN.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 21 Mar 62 REVISED (B) 17 June 1983

P.A. AIR FORCE - 82 Other Cust NAVY - AS AIR FORCE - 99 (B)	TITLE CLAMP, CABLE, AVIATION GROUND LIGHTS	MILITARY STANDARD MS17815
PROCUREMENT SPECIFICATION NONE MIL-B-8954	SUPERSEDES: USAF DWGS 49B7053 AND 49B7054	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureaus (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.