
MILITARY SPECIFICATION SHEET

LIGHT, WAKE, WHITE, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOL 200.2

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the light described herein shall consist of this specification and the latest issue of MIL-L-24560(SH).

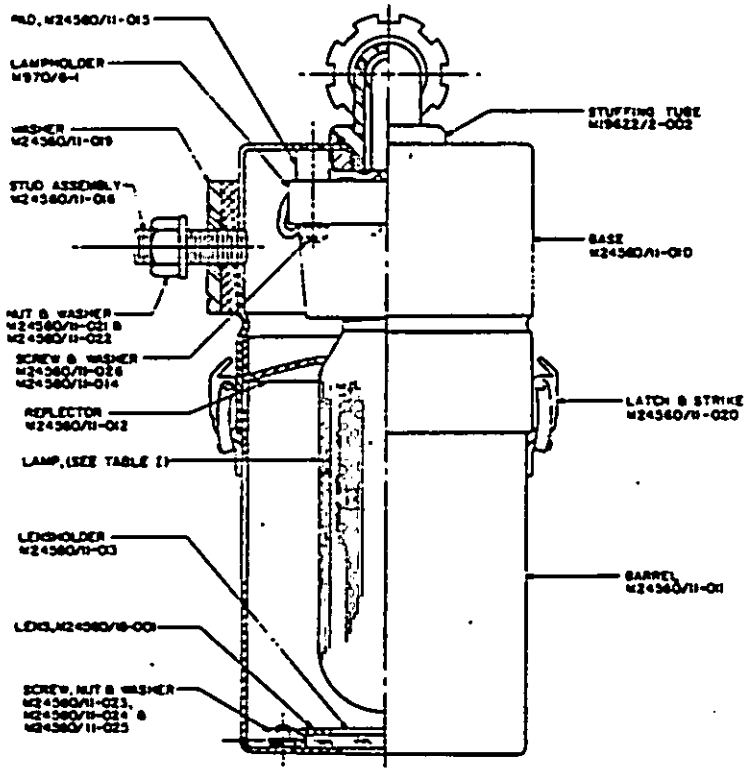


M24560/11-001
ASSEMBLY, WAKE, SYM 200.2


All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.


(A) denotes changes.

FSC 6220


Source: https://assist.dla.mil -- Downloaded: 20261019T22:57Z
Check the source to verify that this is the current version before use.

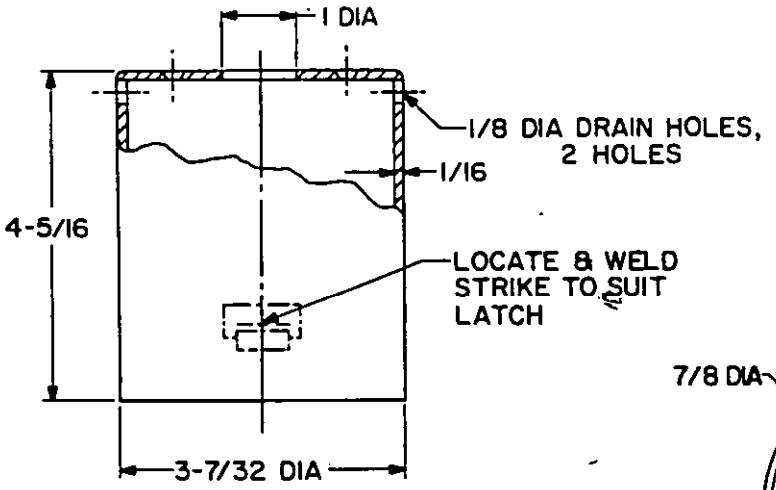

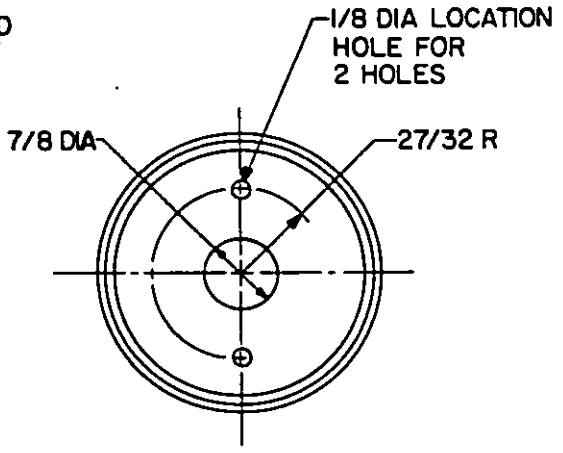

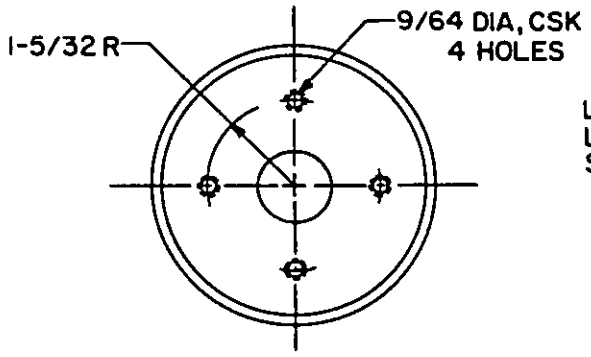


M24560/11-011
BARREL

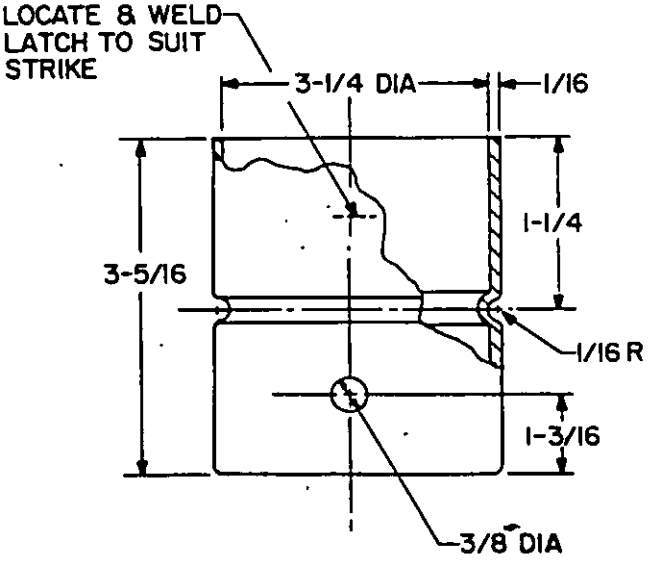

M24560/11-010
BASE

SH11418-1


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:57Z
Check the source to verify that this is the current version before use.

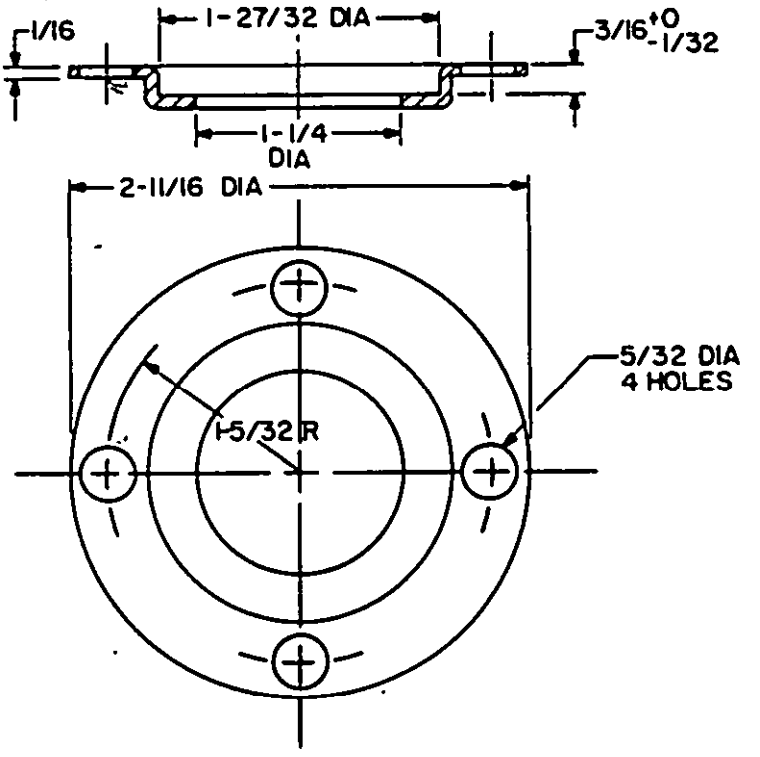


M24560/11-013
LENSHOLDER

SH11418-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

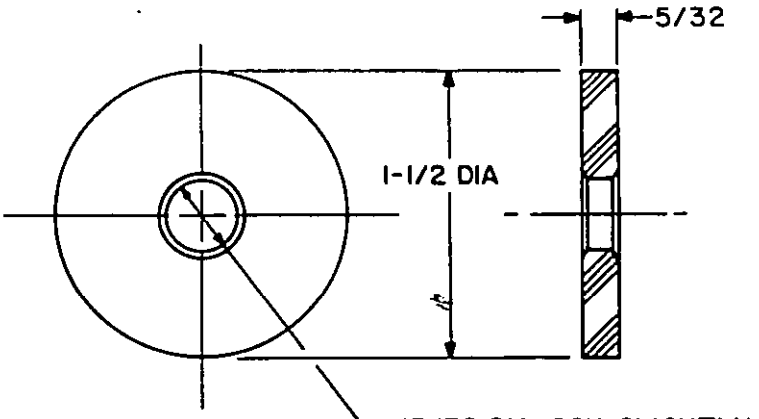

M24560/11-019
WASHER

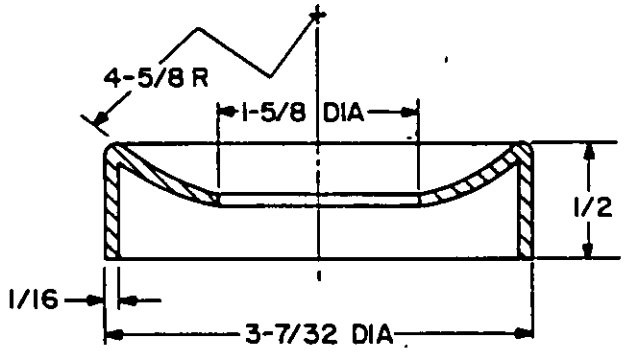


M24560/11-012
REFLECTOR

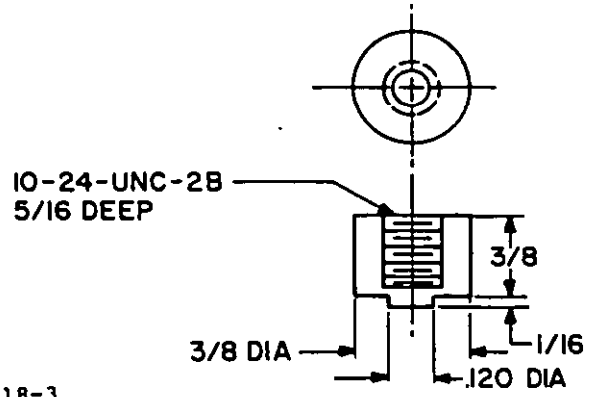

SH11418-3

M24560/11-015
PAD

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:57Z
Check the source to verify that this is the current version before use.

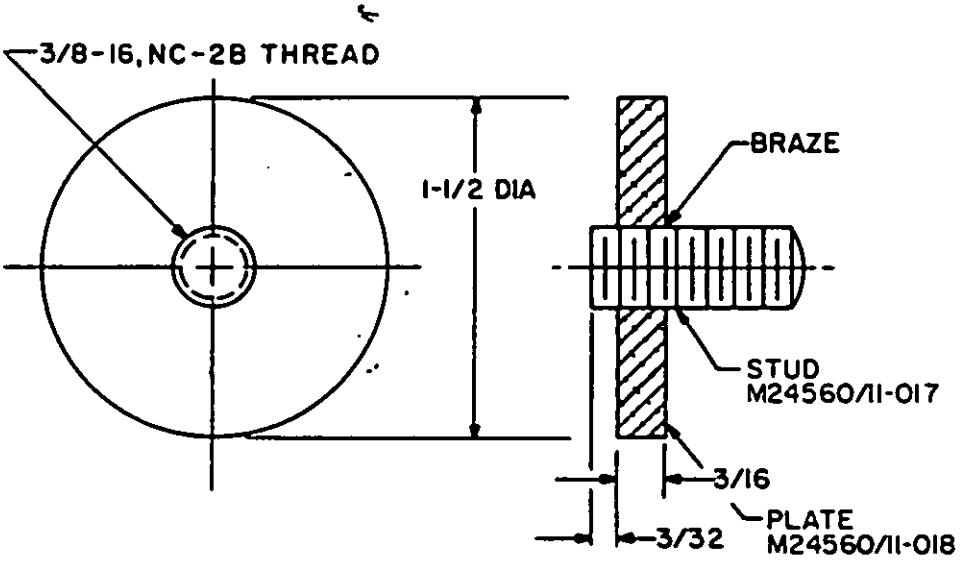

M24560/11-016
STUD ASSEMBLY

SH11418-4

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Electrical rating: 120 volts, 60 Hertz, 50 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (type I)
Parts: See table I
First article: Examination of product, magnetic permeability, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

a. Military part number: M24560/11-001 - (light assembly - Sym 200.2)
(A) b. Supersedes MS17780(SHIPS) symbol 200.2 except lens, piece 6. Lens is now covered on MIL-L-24560/18.
c. Weight: The weight of this light assembly shall be 1.5 pounds maximum.

NOTES:

1. The end of the stuffing tube entering the base shall be cut flush with the locknut, to permit installation and wiring of lampholder.
2. The exterior surfaces shall be given two coats of gray enamel and the interior surfaces shall be given two coats of white baked enamel of a good commercial grade.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/11-010	Base	1	QQ-A-250/8	AL
M24560/11-011	Barrel	1	QQ-A-250/8	AL
M24560/11-012	Reflector	1	QQ-A-250/8	AL
M24560/11-013	Lens holder	1	QQ-A-250/8	AL
M24560/11-014	Washer, lock	2	COML	CRES, #10
M24560/11-015	Pad	1	QQ-A-225/7	AL
M24560/11-016	Stud assembly	-	----	----
M24560/11-017	Stud	1	QQ-A-225/7	AL, 3/8-16 NC-2A x 1-1/4 LG
M24560/11-018	Plate	1	QQ-A-250/8	AL
M24560/11-019	Washer	1	COML	Nylon
M24560/11-020	Latch & strike	2	COML	AL (minature type)
M24560/11-021	Lock washer	1	COML	CRES, 3/8
M24560/11-022	Nut	1	COML	CRES, 3/8
M24560/11-023	Screw, mach F.H.	4	COML	CRES, #6-32 NC-2A x 3/8 LG
M24560/11-024	Washer, lock	4	COML	Phosphor bronze, #6
M24560/11-025	Nut, hex	4	COML	CRES, #6
M24560/11-026	Screw, mach fil hd	2	COML	CRES, #10-24 NC-2A x 3/4 LG
M19622/2-002	Stuffing tube	1	MIL-S-19622/2	
M970/6-1	Lampholder	1	MIL-L-970/6	
	Lamp	1	COML	50/50T12
M24560/18-001	Lens	1	MIL-L-24560/18	Clear

1/ Part numbers M24560/11-010 through M24560/11-026 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N298)

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:57Z
Check the source to verify that this is the current version before use.