INCH-POUND


MIL-DTL-24560/11B(SH)
5 February 1999
SUPERSEDING
MIL-L-24560/11A(SH)
18 November 1981

DETAIL SPECIFICATION SHEET

LIGHT, WAKE, WHITE, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOL 200.2


This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the light described herein shall consist of this specification and MIL-DTL-24560.

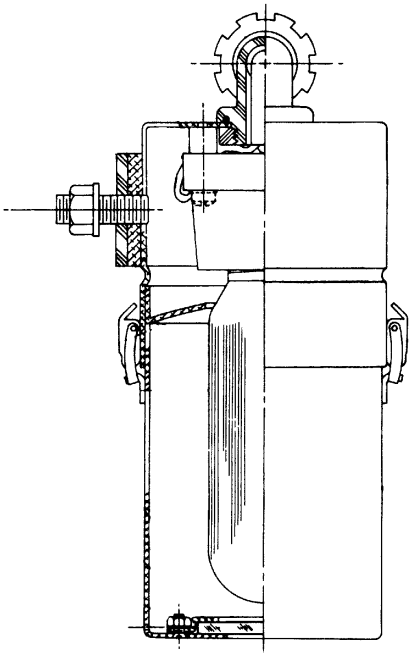

AMSC N/A FSC 6220
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

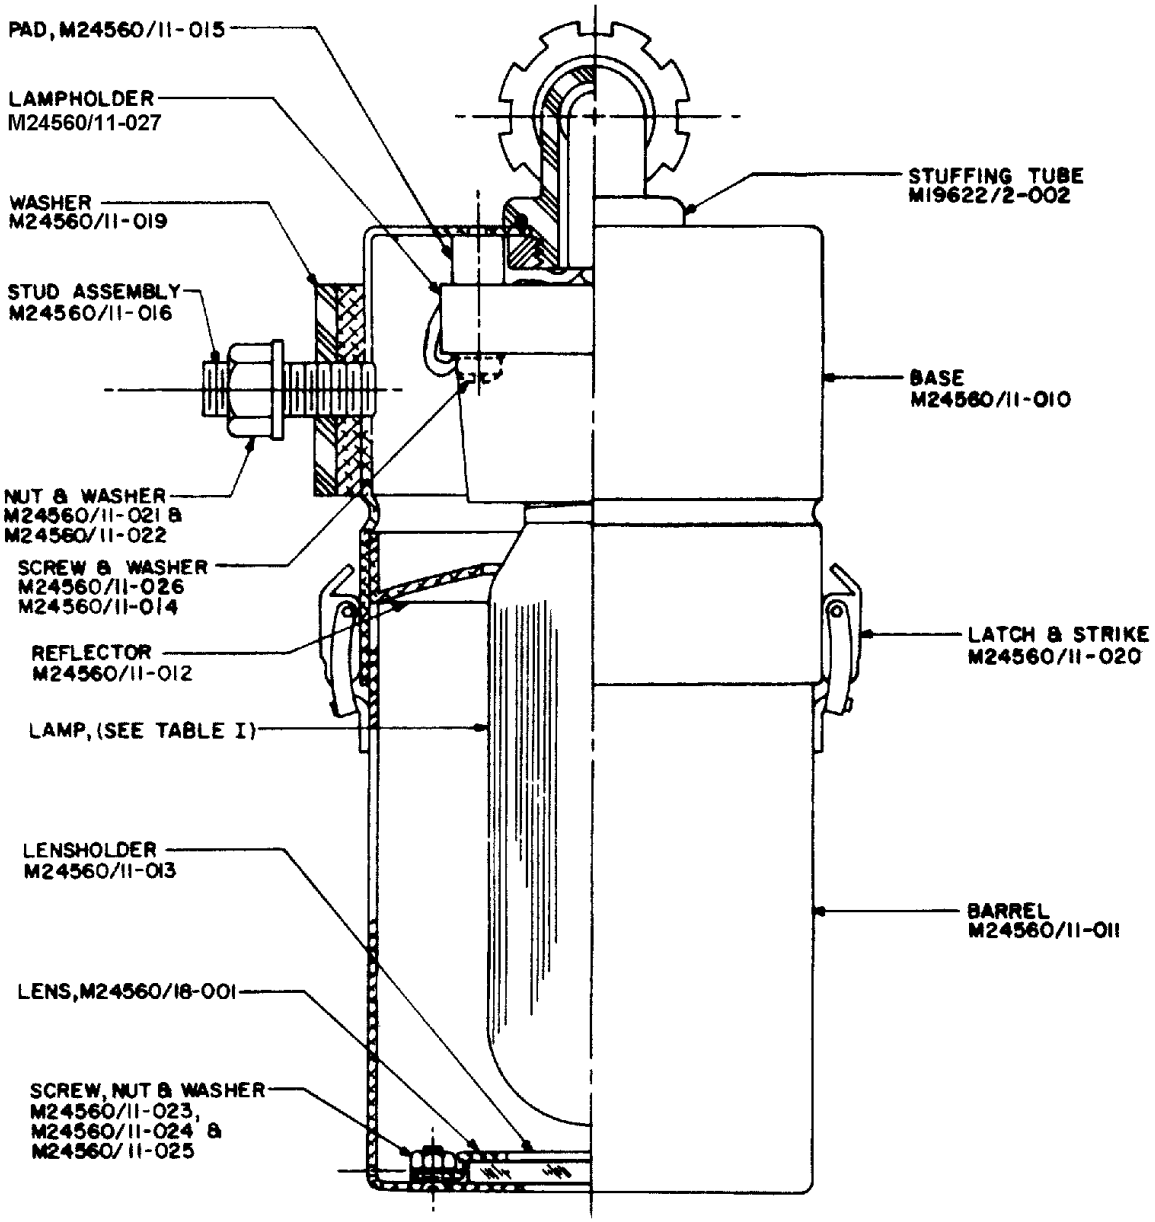

M24560/11-001
ASSEMBLY, WAKE, SYM 200.2

NOTES:

1. All dimensions are in inches.
2. For tolerances other than those specified herein, see MIL-DTL-24560.

FIGURE 1. Light assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

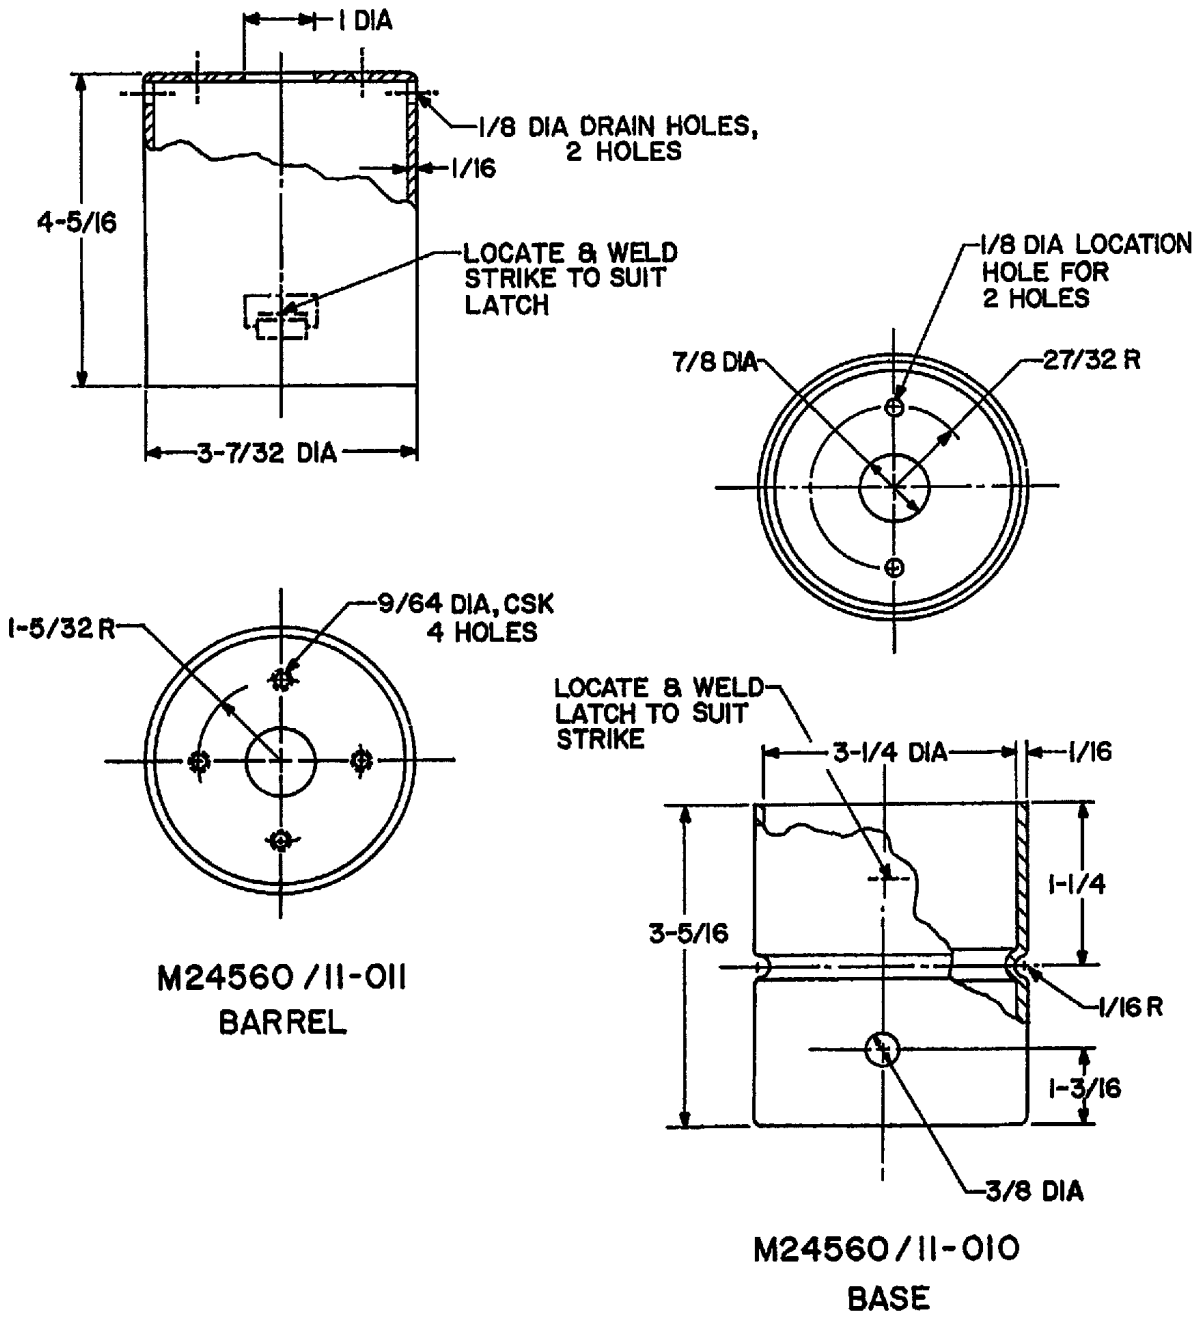


FIGURE 2. Barrel and base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

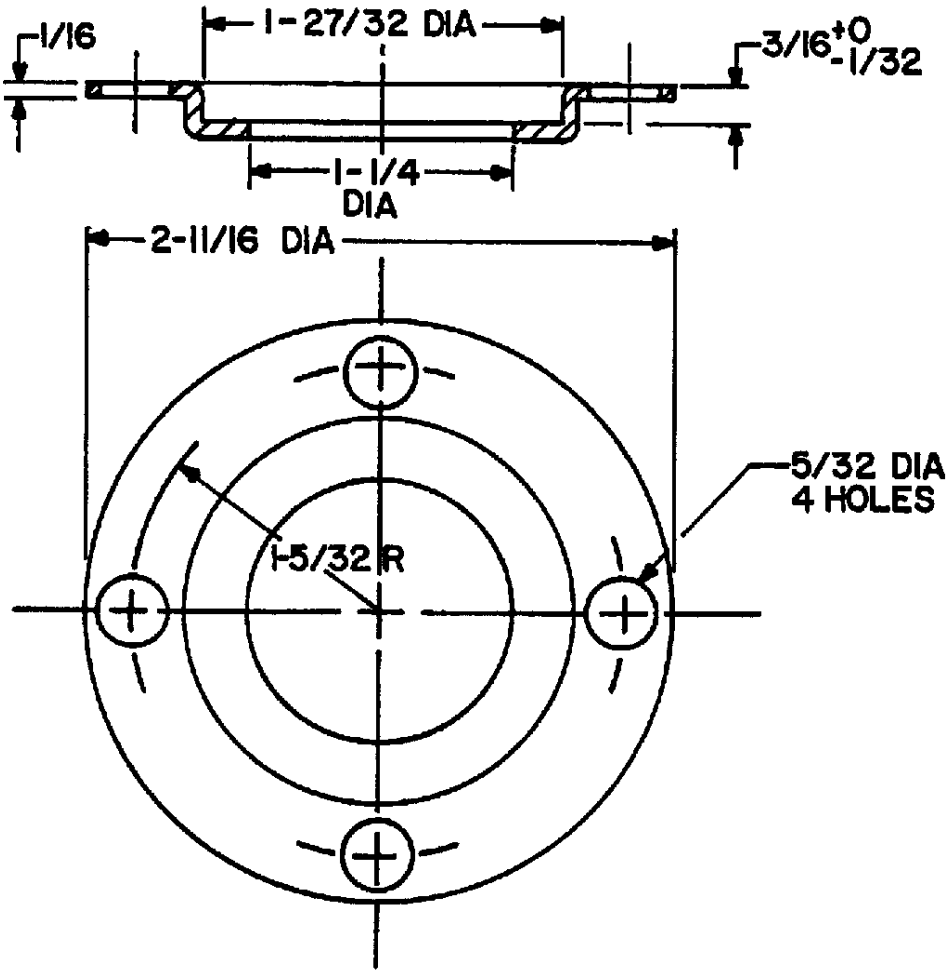


FIGURE 3. Lensholder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

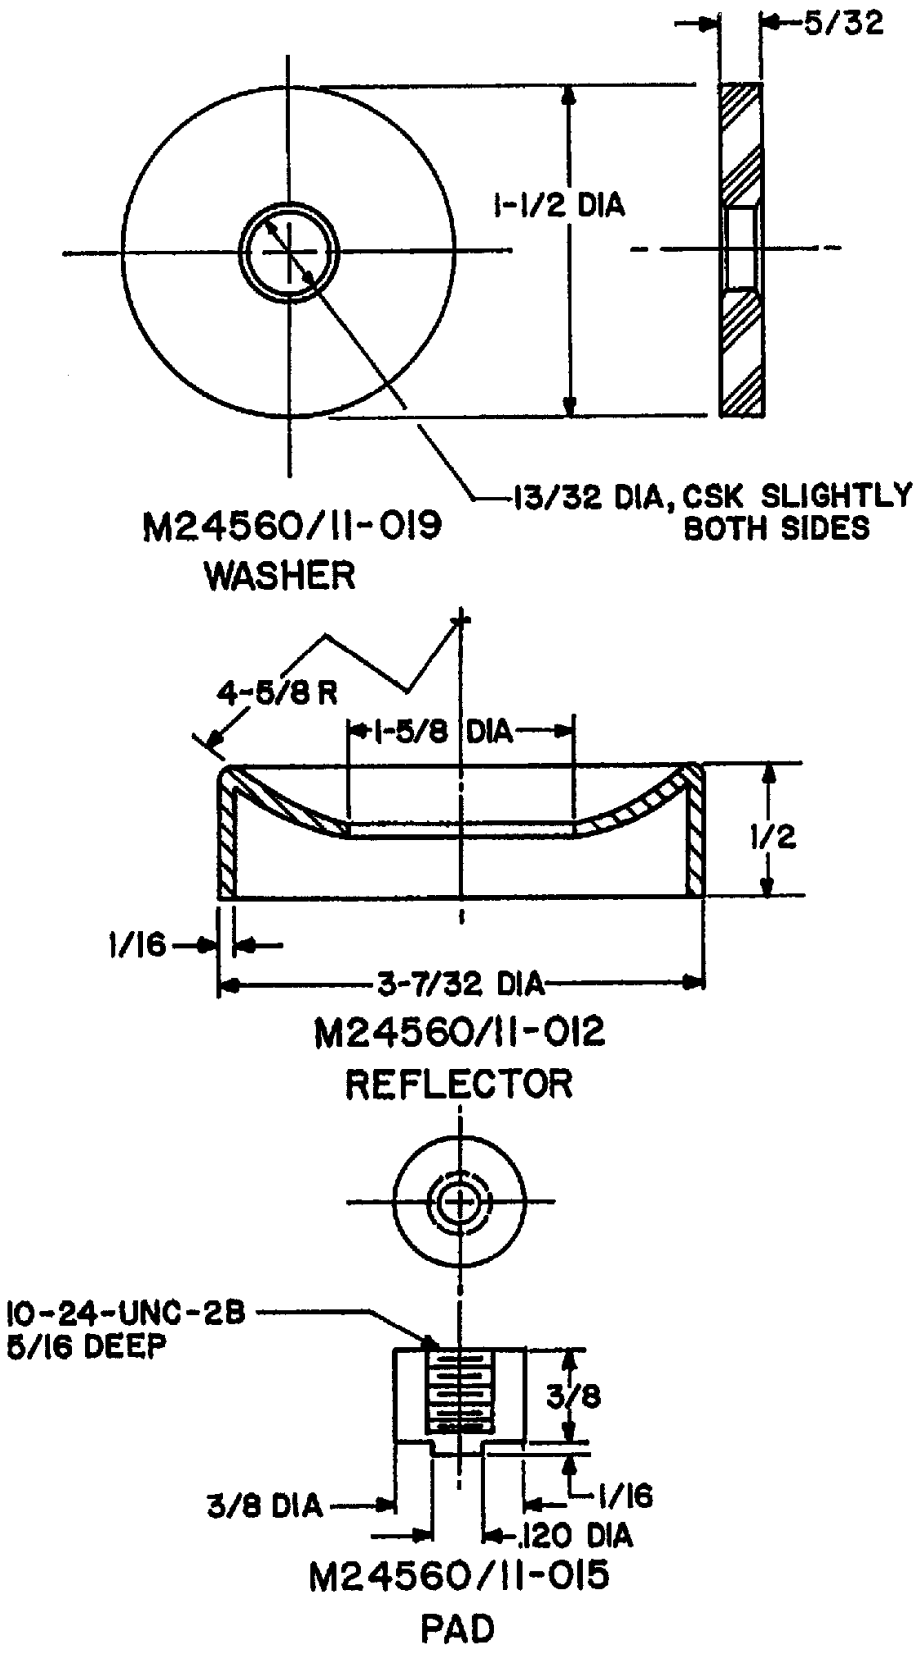


FIGURE 4. Washer, reflector, and pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

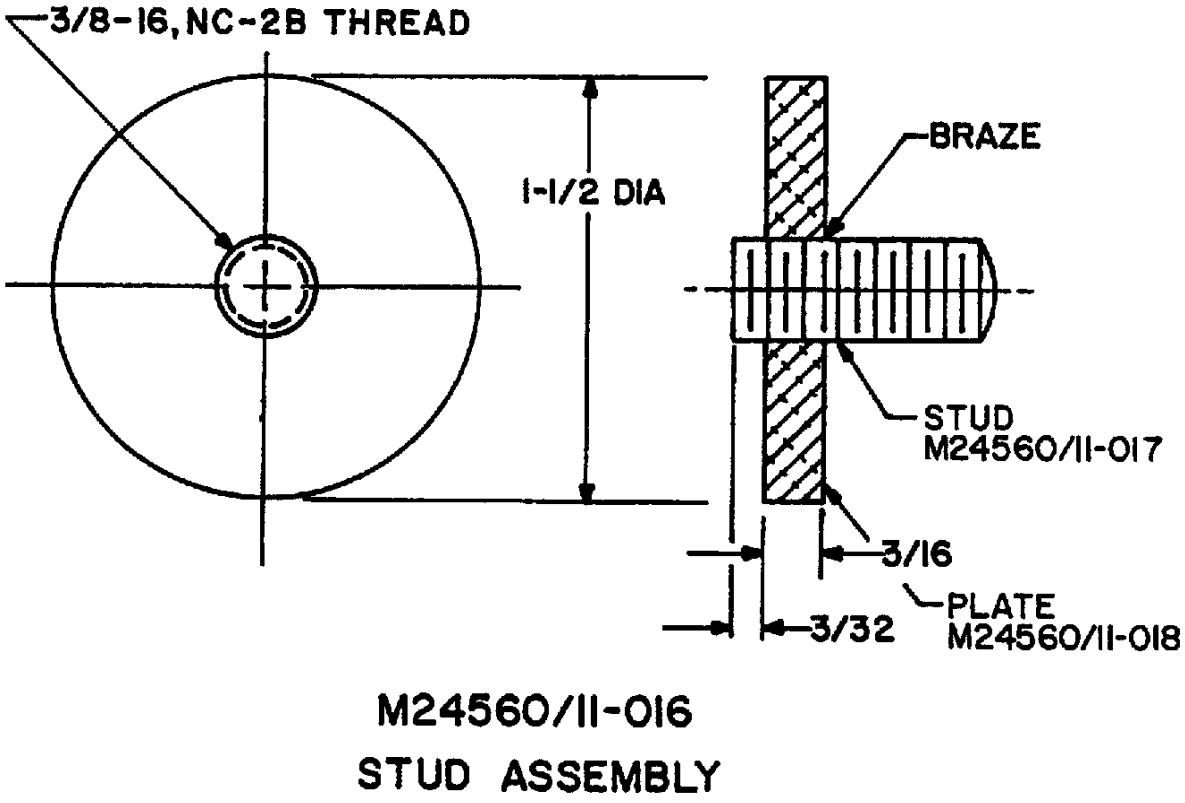


FIGURE 5. Stud assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 50 watts.
Dimensions and configuration: See figures.
Enclosure: Splashproof (type I).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Assignment of military part numbers and general information are as follows:

(a) Military part number: M24560/11-001 - light assembly, symbol 200.2.
(b) Supersedes MS17780 symbol 220.2 except lens, piece 6. Lens is now covered on MIL-L-24560/18.
(c) Weight: The weight of this light assembly shall be not greater than 1.5 pounds.

NOTES:
1. The end of the stuffing tube entering the base shall be cut flush with the locknut, to permit installation and wiring of lampholder.
2. The exterior surfaces shall be given two coats of gray enamel and the interior surfaces shall be given two coats of white baked enamel of a good commercial grade.

TABLE I. Parts.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/11-010	Base	1	QQ-A-250/8	AL
M24560/11-011	Barrel	1	QQ-A-250/8	AL
M24560/11-012	Reflector	1	QQ-A-250/8	AL
M24560/11-013	Lens holder	1	QQ-A-250/8	AL
M24560/11-014	Washer, lock	22	COML	CRES, #10
M24560/11-015	Pad	1	QQ-A-225/8	AL
M24560/11-016	Stud assembly	-	-----	-----
M24560/11-017	Stud	1	QQ-A-225/8	AL, 3/8-16 NC-2A x 1-1/4 LG
M24560/11-018	Plate	1	QQ-A-250/8 or QQ-A-225/8	AL

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.

TABLE I. Parts - Continued.

Part number 1/	Part name	Qty.	Specification	Additional information
M24560/11-019	Washer	1	COML	Nylon
M24560/11-020	Latch & strike	2	COML	AL (miniature type) or CRES
M24560/11-021	Lock washer	1	COML	CRES, 3/8
M24560/11-022	Nut	1	COML	CRES, 3/8
M24560/11-023	Screw, mach F.H.	4	COML	CRES, #6-32 NC-2A x 3/8 LG
M24560/11-024	Washer, lock	4	COML	Phosphor bronze, #6
M24560/11-025	Nut, hex	4	COML	CRES, #6
M24560/11-026	Screw, mach fil hd	2	COML	CRES, #10-24 NC-2A x ¾ LG
M19622/2-002	Stuffing tube	1	MIL-S-19622/2	
M24560/11-027	Lampholder assembly	1	COML - UL496	Supplement SA, fig. SA3.6
	Lamp	1	COML	50/50T12
M24560/18-001	Lens	1	MIL-L-24560/18	Clear

1/ Part numbers M24560/11-010 through M24560/11-027 were assigned for reference purposes only.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy - SH
(Project 6220-N390)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:57Z
Check the source to verify that this is the current version before use.