
MILITARY SPECIFICATION SHEET

LIGHT, NAVIGATION, TRAFFIC CONTROL (AIRCRAFT CARRIERS), 120 VOLTS, 90 WATTS, SIX LAMPS, RED AND GREEN, SYMBOL 221

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the light described herein shall consist of this document and the latest issue of MIL-L-24560(SH).

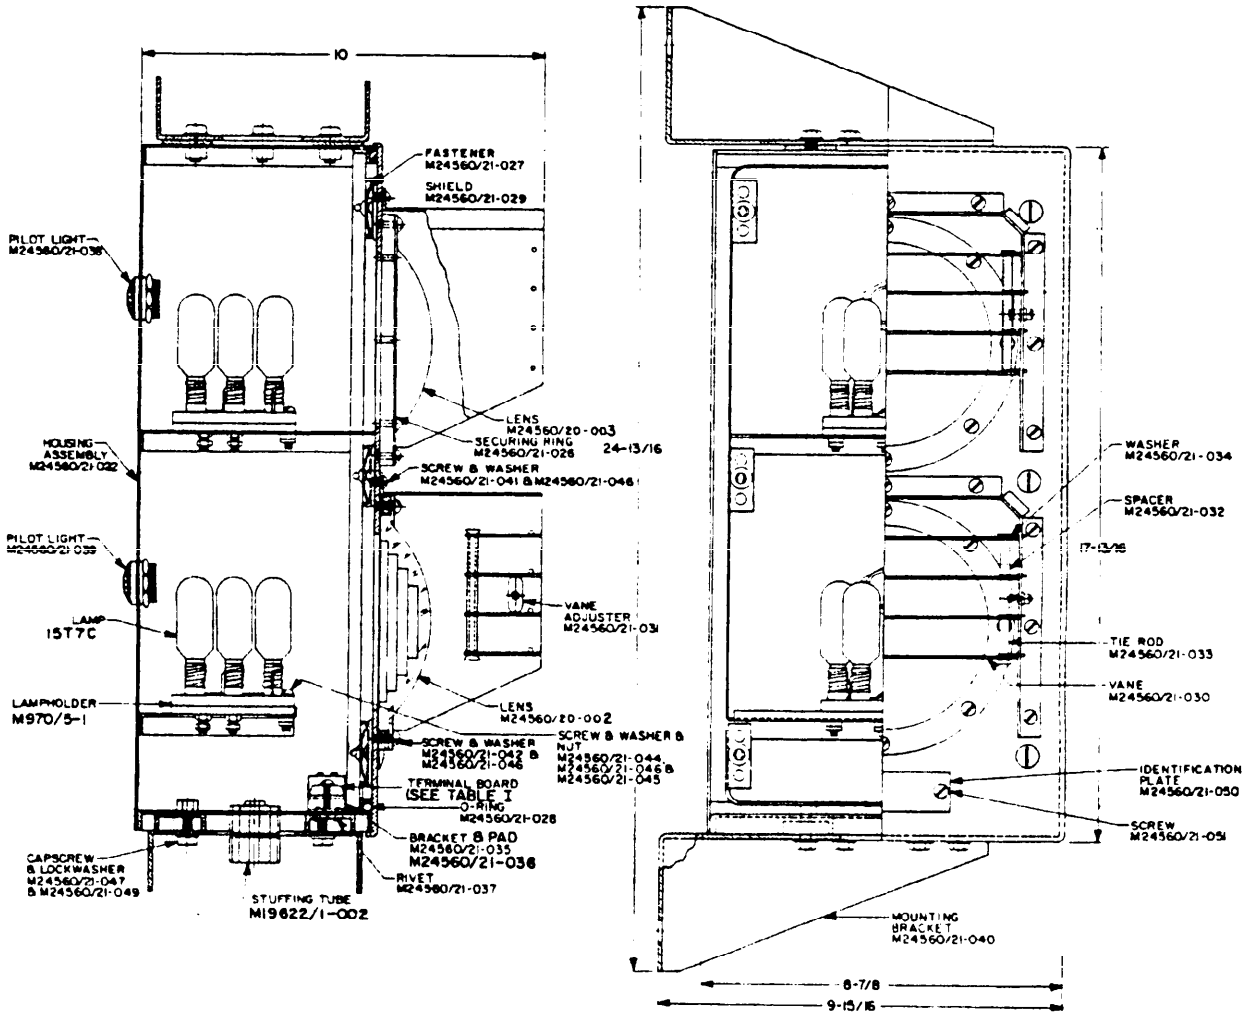


SH11429

M24560/21-001
ASSEMBLY, TRAFFIC LIGHT - SYM 221

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.


FSC 6220

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:58Z
Check the source to verify that this is the current version before use.

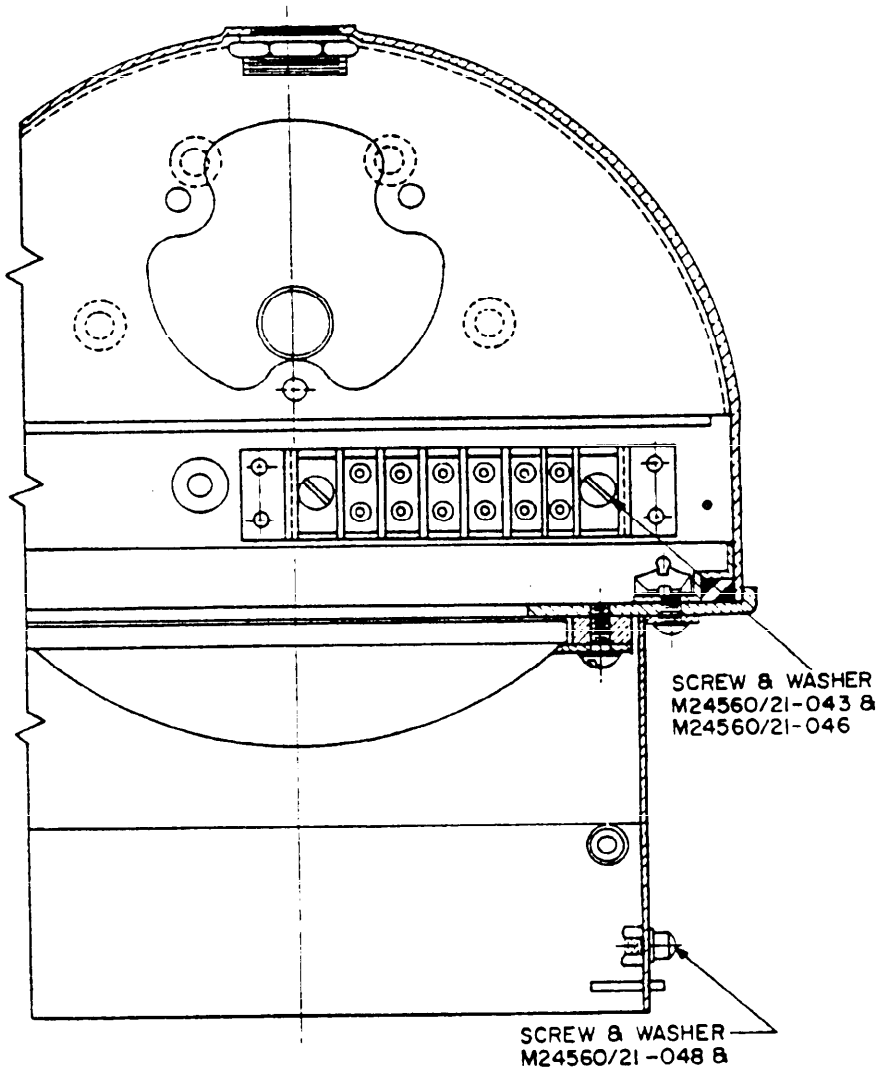

SH11429-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:58Z
Check the source to verify that this is the current version before use.

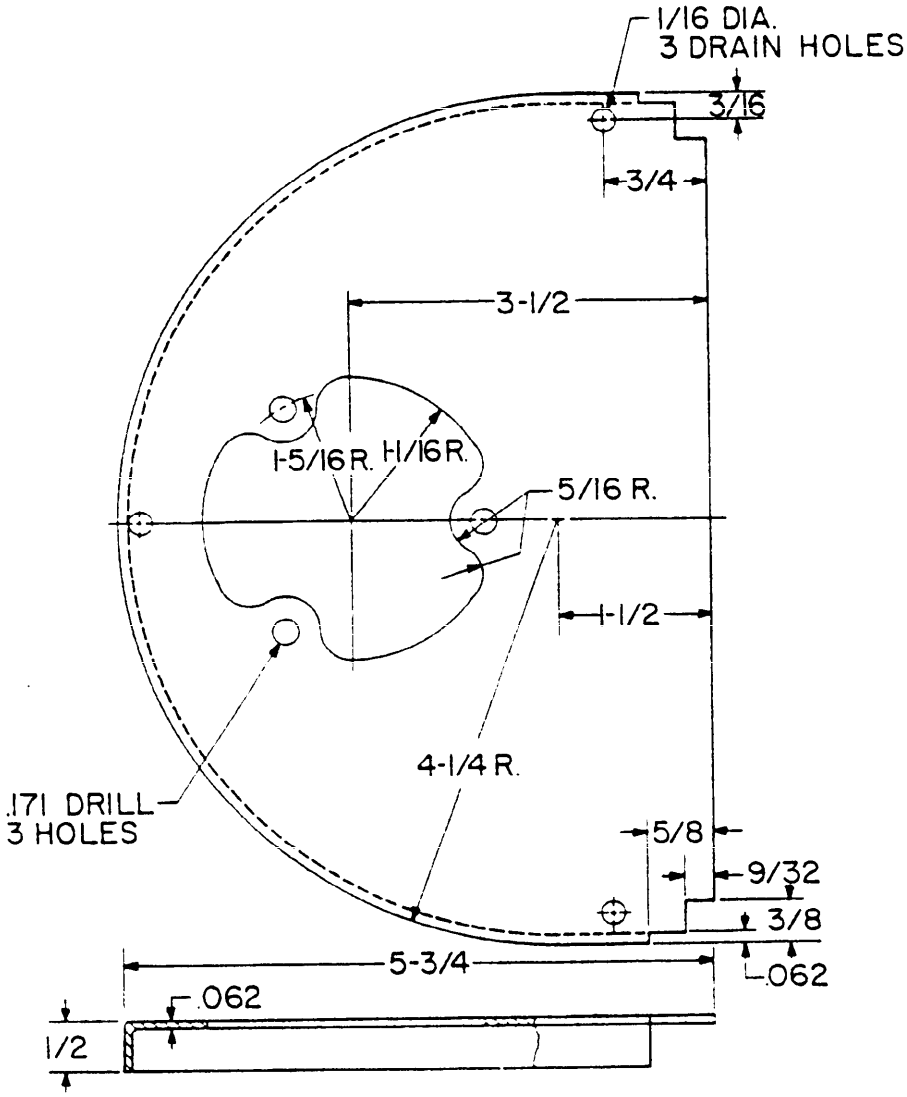

M24560/21-012
LAMP SUPPORT
(UPPER)

SH11429-2


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the current version before use.

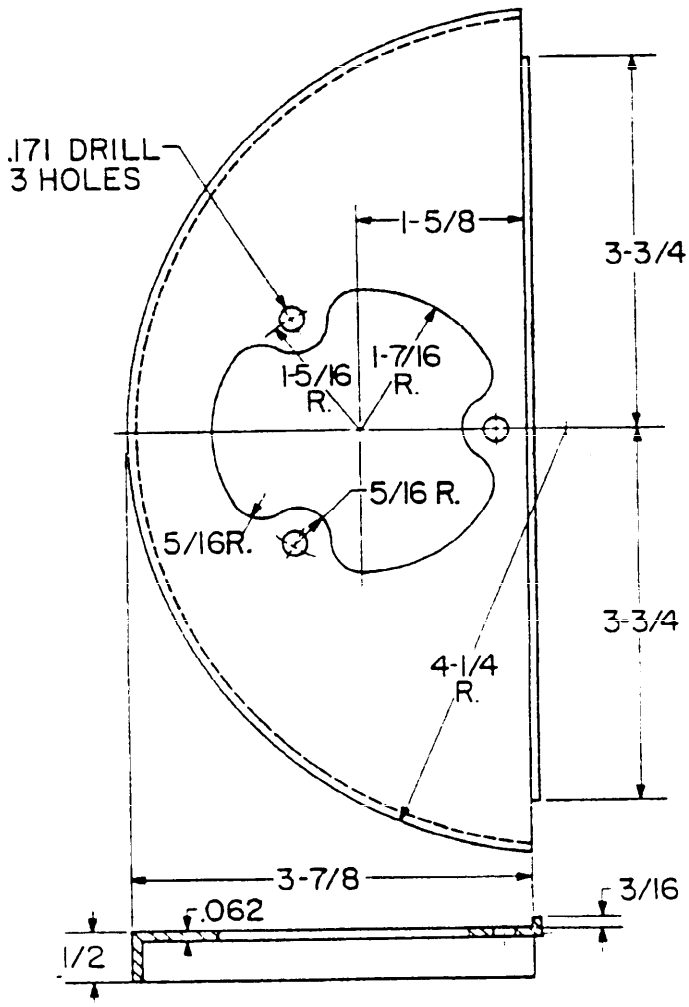


M24560/21-013
LAMP SUPPORT
(LOWER)


SH11429-3

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the current version before use.

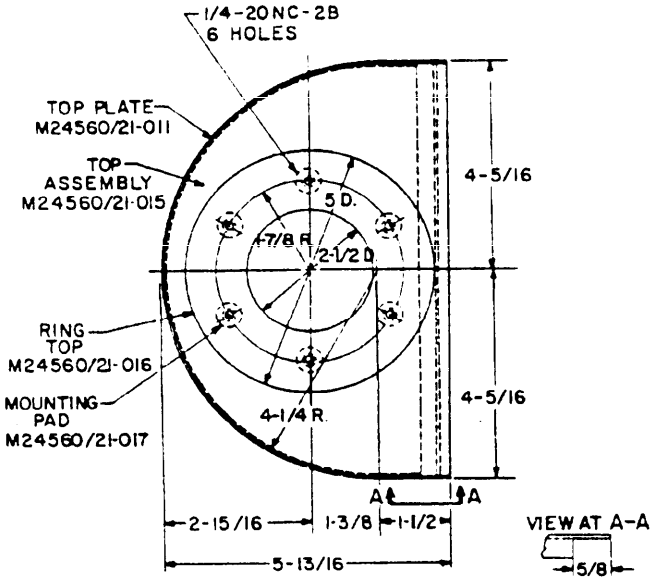


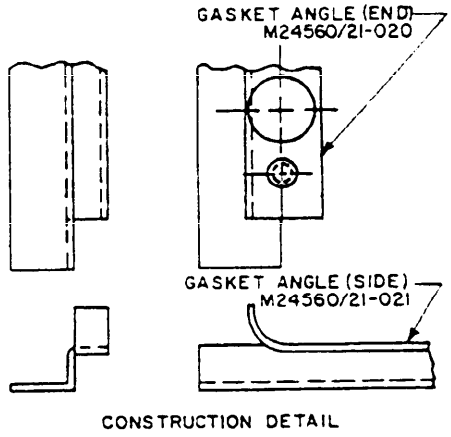

CONSTRUCTION DETAIL

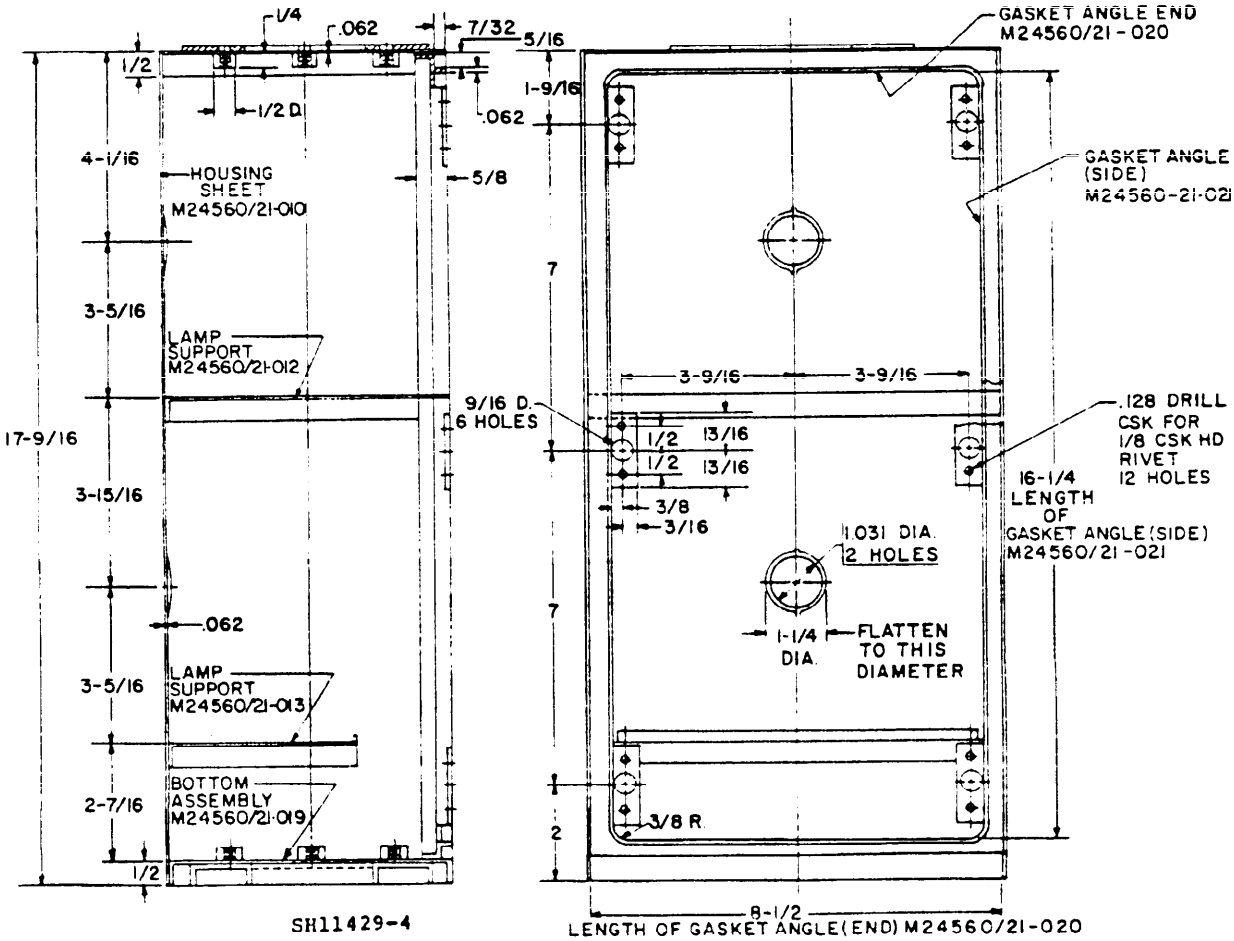


Source: https://assist.dla.mil -- Downloaded: 20260-19T22:58Z
Check the source to verify that this is the current version before use.

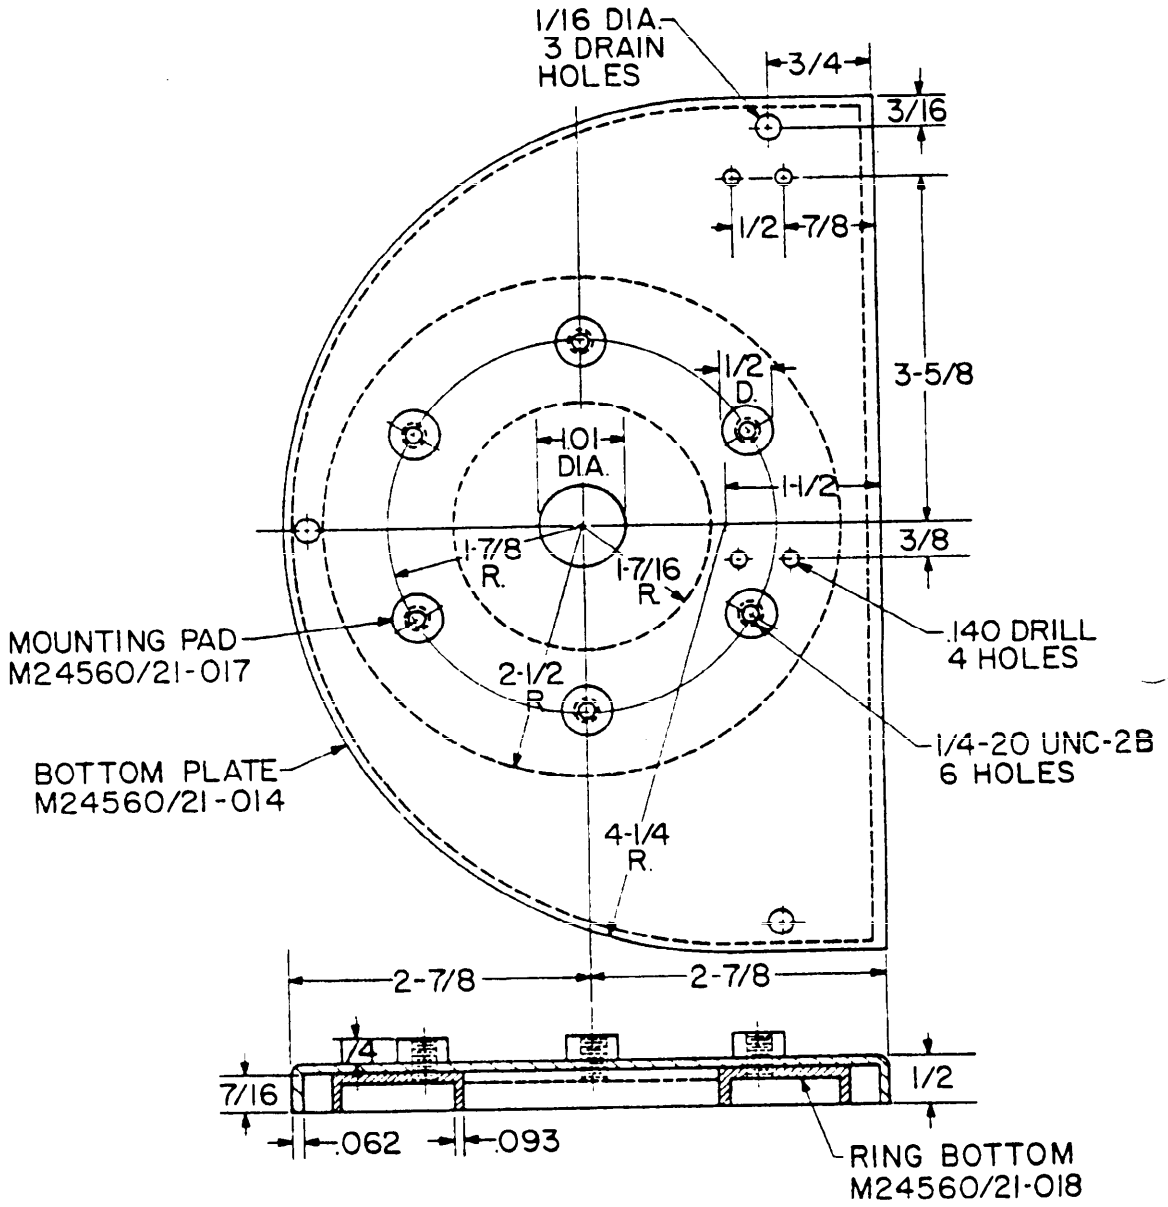

M24560/21-019
BOTTOM ASSEMBLY

SH11429-5


Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:58Z
Check the source to verify that this is the currentversion before use.

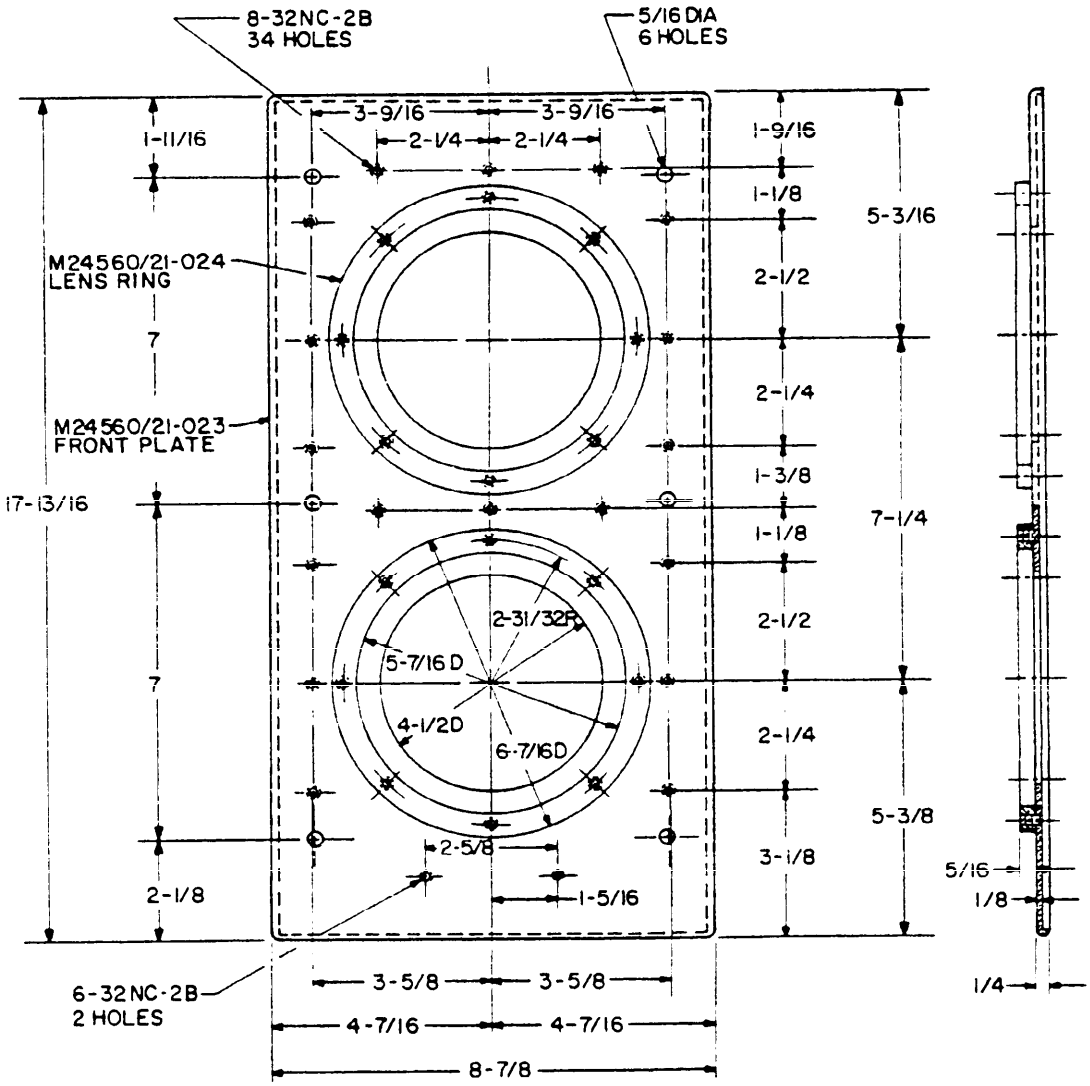


SH11429-6

M24560/21-025
FRONT ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the current version before use.

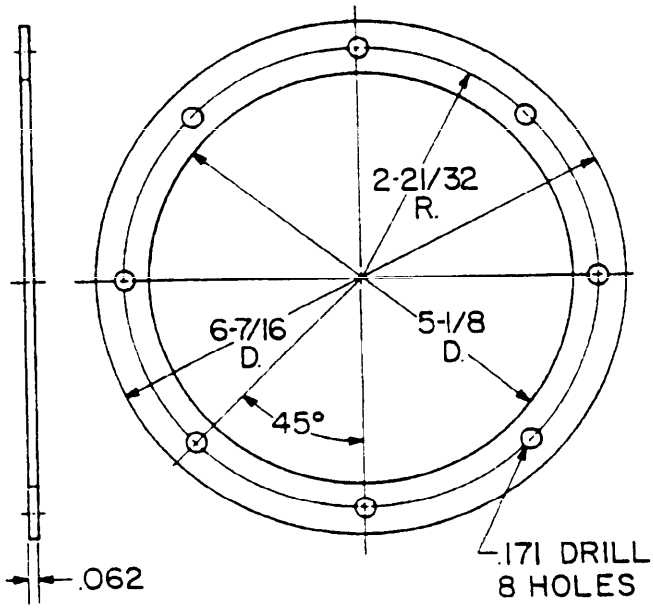

M24560/21-026
SECURING RING

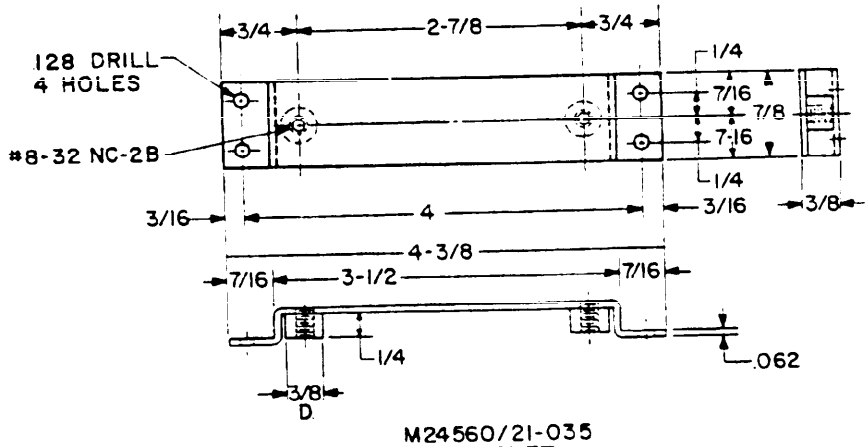


M24560/21-035
BRACKET

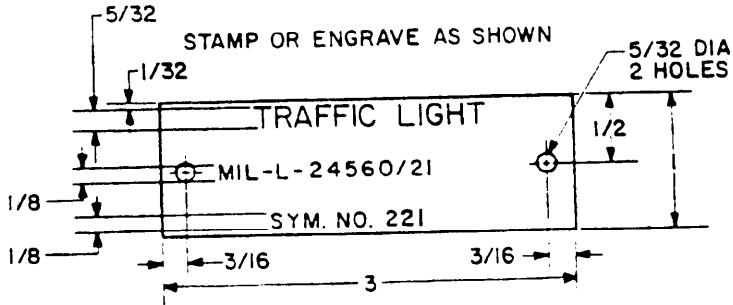

M24560/21-050
IDENTIFICATION PLATE

SH11429-7


Source: https://assist.dla.mil -- Downloaded: 20260-19T22:58Z
Check the source to verify that this is the current version before use.

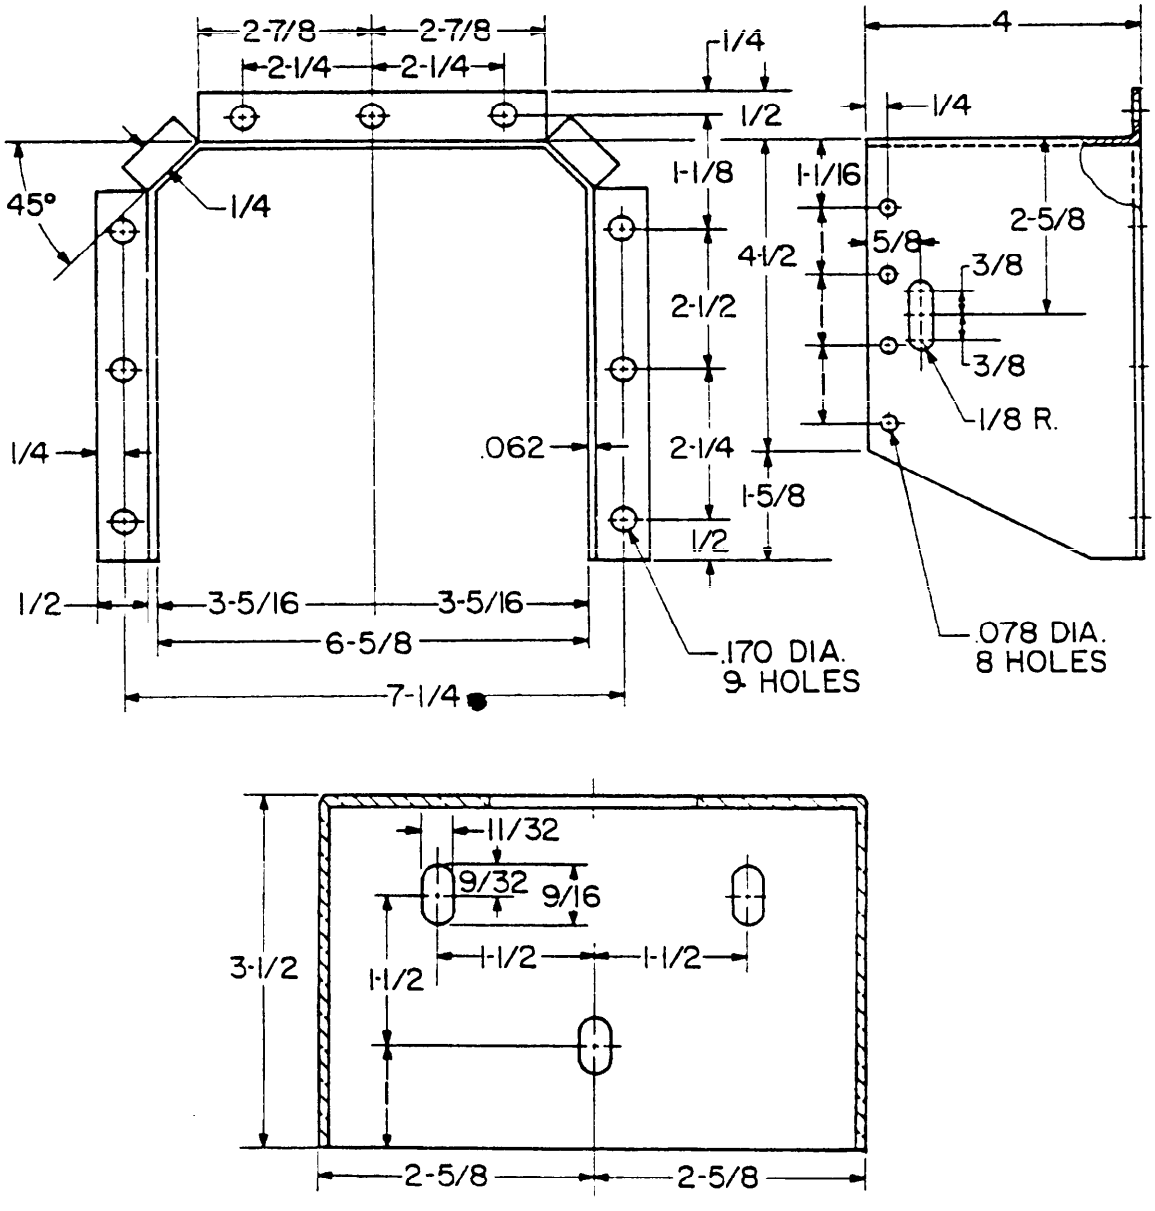

SH11429-8


M24560/21-029.
SHIELD

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the current version before use.

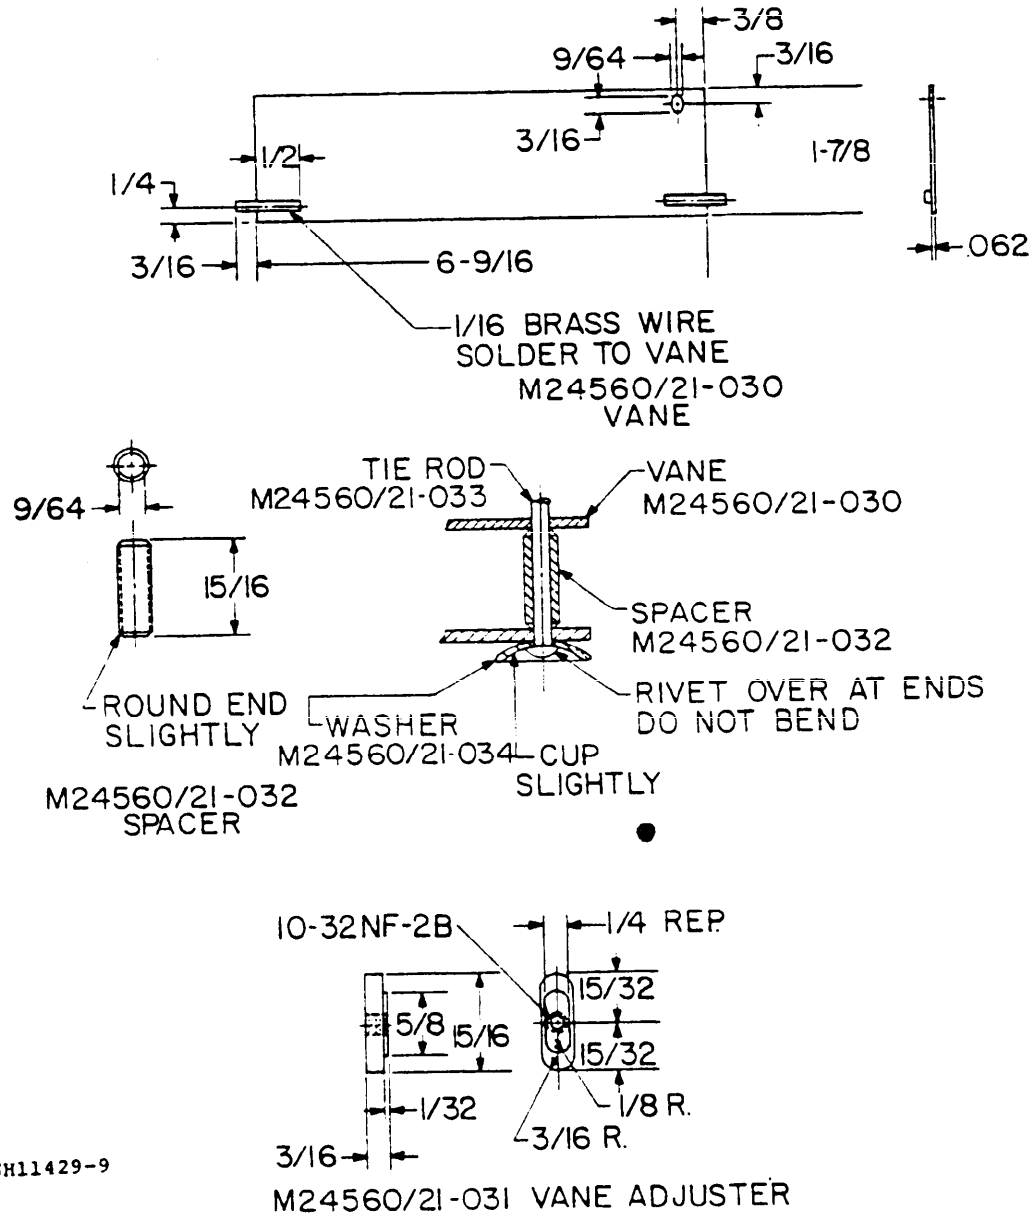

SH11429-9

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the current version before use.

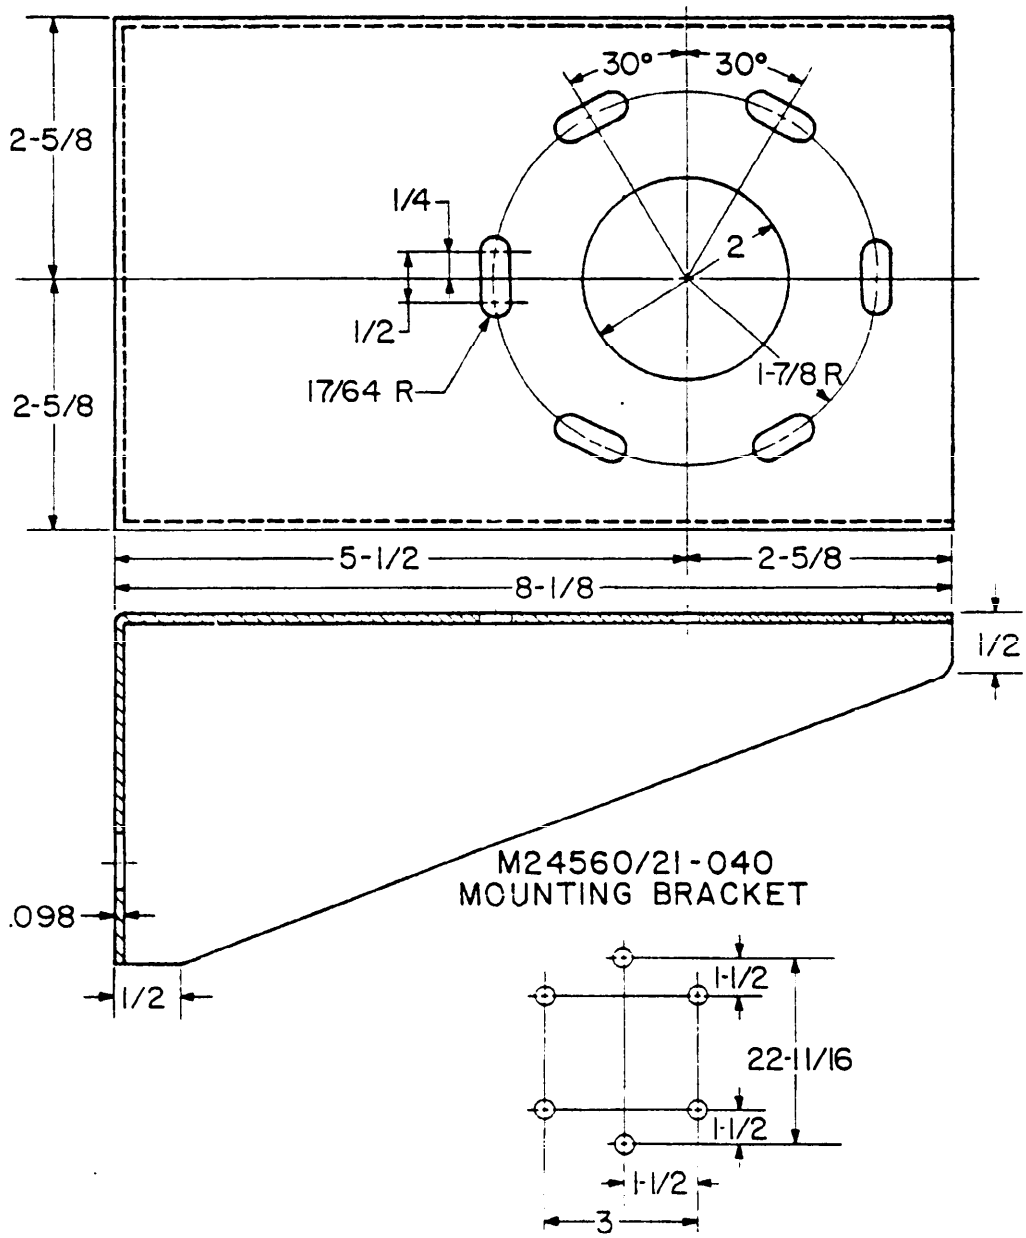

M24560/21-040
MOUNTING BRACKET

MOUNTING DIMENSIONS
MOUNTING BOLTS SHALL BE 5/16-18

SH11429-10

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the current version before use.

Agencies of the Department of Defense

REQUIREMENTS:

DESIGNS:
Electrical rating: 120 volts, 60 Hertz, 90 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (Type I)
Parts: See table I
First article: Examination of product, magnetic permeability, insulation resistance, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure, operation

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

(a) Military part number: M24560/21-001 - Sym 221
(b) Supersedes NAVSHIPS Drawing 9000-S6505-74104
(c) Weight: The light assembly shall weigh 30 pounds maximum.

NOTES:
1. Fasteners, M24560/21-027 shall be Lion Fastener Part No. 5-0-200 manufactured by Lion Fastener Inc., Honeoye Falls, New York, or the equivalent.
2. Pilot lights, M24560/21-038 and M24560/21-039 shall be complete assemblies having faceted lens and be equivalent to that of Dial Light Company of America, Cat. No. 75006-43.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/21-010	Housing Sheet	1	MIL-B-895	Brass
M24560/21-011	Top Plate	1	MIL-B-895	Brass
M24560/21-012	Lamp Support (Upper)	1	MIL-B-895	Brass
M24560/21-013	Lamp Support (Lower)	1	MIL-B-895	Brass
M24560/21-014	Bottom Plate	1	MIL-B-895	Brass
M24560/21-015	Top Assembly	-	----	----
M24560/21-016	Ring Top	1	MIL-B-895	Brass
M24560/21-017	Mounting Pad	12	MIL-B-895	Brass
M24560/21-018	Ring Bottom	1	MIL-B-895	Brass
M24560/21-019	Bottom Assembly	-		
M24560/21-020	Gasket Angle (End)	2	MIL-B-895	Brass
M24560/21-021	Gasket Angle (Side)	2	MIL-B-895	Brass
M24560/21-022	Housing Assembly	-	----	----
M24560/21-023	Front Plate	1	MIL-B-895	Brass
M24560/21-024	Lens Ring	2	MIL-B-895	Brass
M24560/21-025	Front Assembly	-	----	----
M24560/21-026	Securing Ring	2	MIL-B-895	Brass
M24560/21-027	Fastener (Complete)	6	COML	See Note 1
M24560/21-028	O-Ring	1	MIL-R-900	Rubber, 1/4 D Length to Suit
M24560/21-029	Shield	2	MIL-B-895	Brass
M24560/21-030	Vane	8	MIL-B-895	Brass
M24560/21-031	Vane Adjuster	2	MIL-B-895	Brass
M24560/21-032	Spacer	6	COML	Brass, 9/64 I.D. Tubing
M24560/21-033	Tie Rod	2	COML	Brass, 1/8 D Length to Suit
M24560/21-034	Washer	4	COML	Brass, 1/8 I.D. x 1/2 O.D. x 1/16 Thick
M24560/21-035	Bracket	1	MIL-B-895	Brass
M24560/21-036	Pad	2	MIL-B-895	Brass
M24560/21-037	Rivet	4	COML	Brass, 1/8 RH - Length to Suit
M24560/21-038	Pilot Light (Red)	1	COML	See Note 2
M24560/21-039	Pilot Light (Green)	1	COML	See Note 2
M24560/21-040	Mounting Bracket	2	MIL-B-895	Brass
M24560/21-041	Screw, R.H. Mach.	18	COML	Brass, #8-32 NC-2A x 5/16 Long
M24560/21-042	Screw, R.H. Mach.	16	COML	Brass, #8-32 NC-2A x 1/2 Long
M24560/21-043	Screw, R.H. Mach.	2	COML	Brass, #8-32 NC-2A x 5/8 Long

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:58Z
Check the source to verify that this is the current version before use.

TABLE I. Parts. - Continued

Part number[1/]	Part name	Quantity	Specification	Additional information
M24560/21-044	Screw, R.H. Mach	6	COML	Brass, #8-32 NC-2A x 7/8 Long
M24560/21-045	Nut, Hex	12	COML	Brass, #8-32 NC-2B
M24560/21-046	Washer, Shakeproof	54	COML	Steel, #8 Zinc Finish
M24560/21-047	Cap Screw, Hex	12	COML	Brass, 1/4-20 NC-2A x 1 Long
M24560/21-048	Screw, R.H. Mach.	2	COML	Brass, #10-32 NF-2A x 3/8 Long
M24560/21-049	Lockwasher	12	COML	Steel, 1/4 In Zinc Finish
M24560/21-050	Identification Plate	1	MIL-P-15024	Copper Alloy, Type B, Severe Service of MIL-P-15024/5
M24560/21-051	Screw, R.H. Mach	2	COML	Brass, #6-32 NC-2A x 1/4 Long
M24560/21-052	Washer	2	COML	Brass, 13/64 I.D. x 1/2 O.D. x 3/64 Thick
	Lamp	12	COML	15T7C
M970/5-1	Lampholder	2	MIL-L-970/5	
M19622/1-002	Stuffing Tube	1	MIL-S-19622/1	
	Terminal Board	1	MIL-T-55164	M55164/16 Type 10TB12
M24560/20-002	Lens	1	MIL-L-24560/20	Green
M24560/20-003	Lens	1	MIL-L-24560/20	Red

[1/] Part numbers M24550/21-010 through M24560/21-052 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N267-21)

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-L-24560/21

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:58Z
Check the source to verify that this is the currentversion before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Naval Sea Systems Command (SEA 3112S)
Department of the Navy
Washington, DC 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:58Z
Check the source to verify that this is the current version before use.