
MIL-L-24560/22(SH)
10 September 1979
SUPERSEDING NAVSHIPS
DRAWING 9000-S6505-74114 REV C
26 May 1956

MILITARY SPECIFICATION SHEET

LIGHT, NAVIGATION, TRAFFIC LIGHT (LST'S), 120 VOLTS, 90 WATTS, SIX LAMPS, RED, YELLOW, GREEN, SYMBOL 222

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the light described herein shall consist of this document and the latest issue of MIL-L-24560(SH).

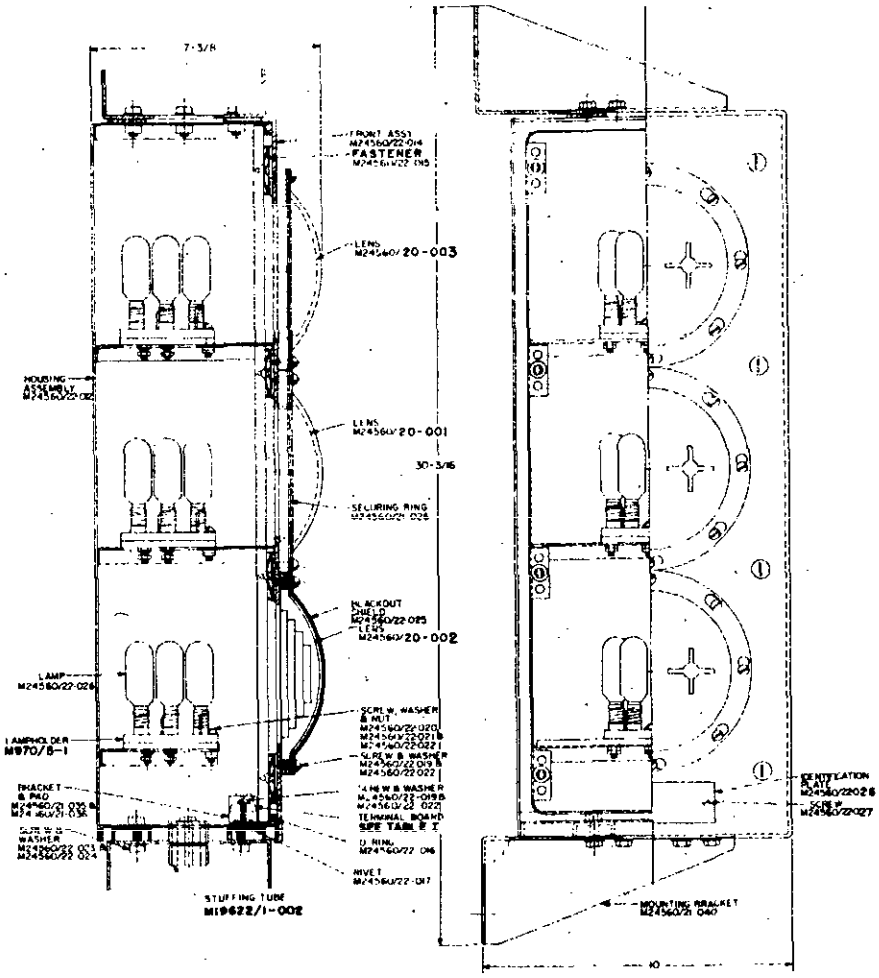


SH11430

M24560/22-001
ASSEMBLY, TRAFFIC LIGHT-SYM. 222

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.

FSC 6220


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

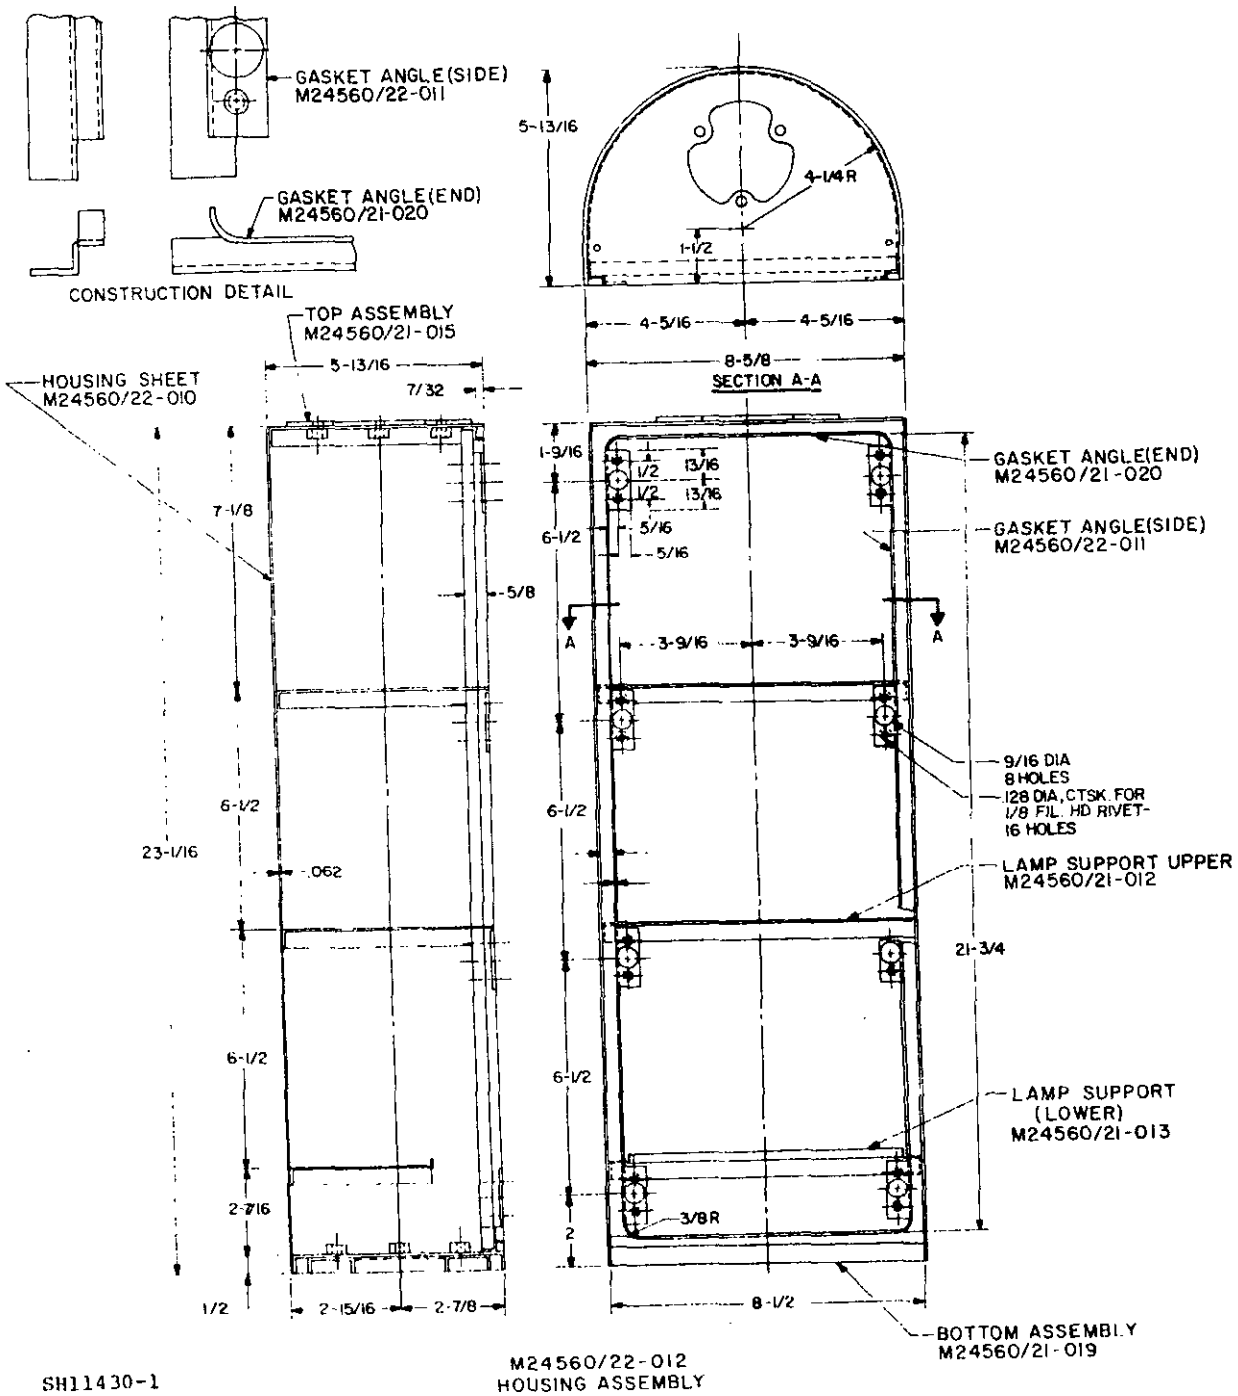

SH11430-1

M24560/22-012
HOUSING ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

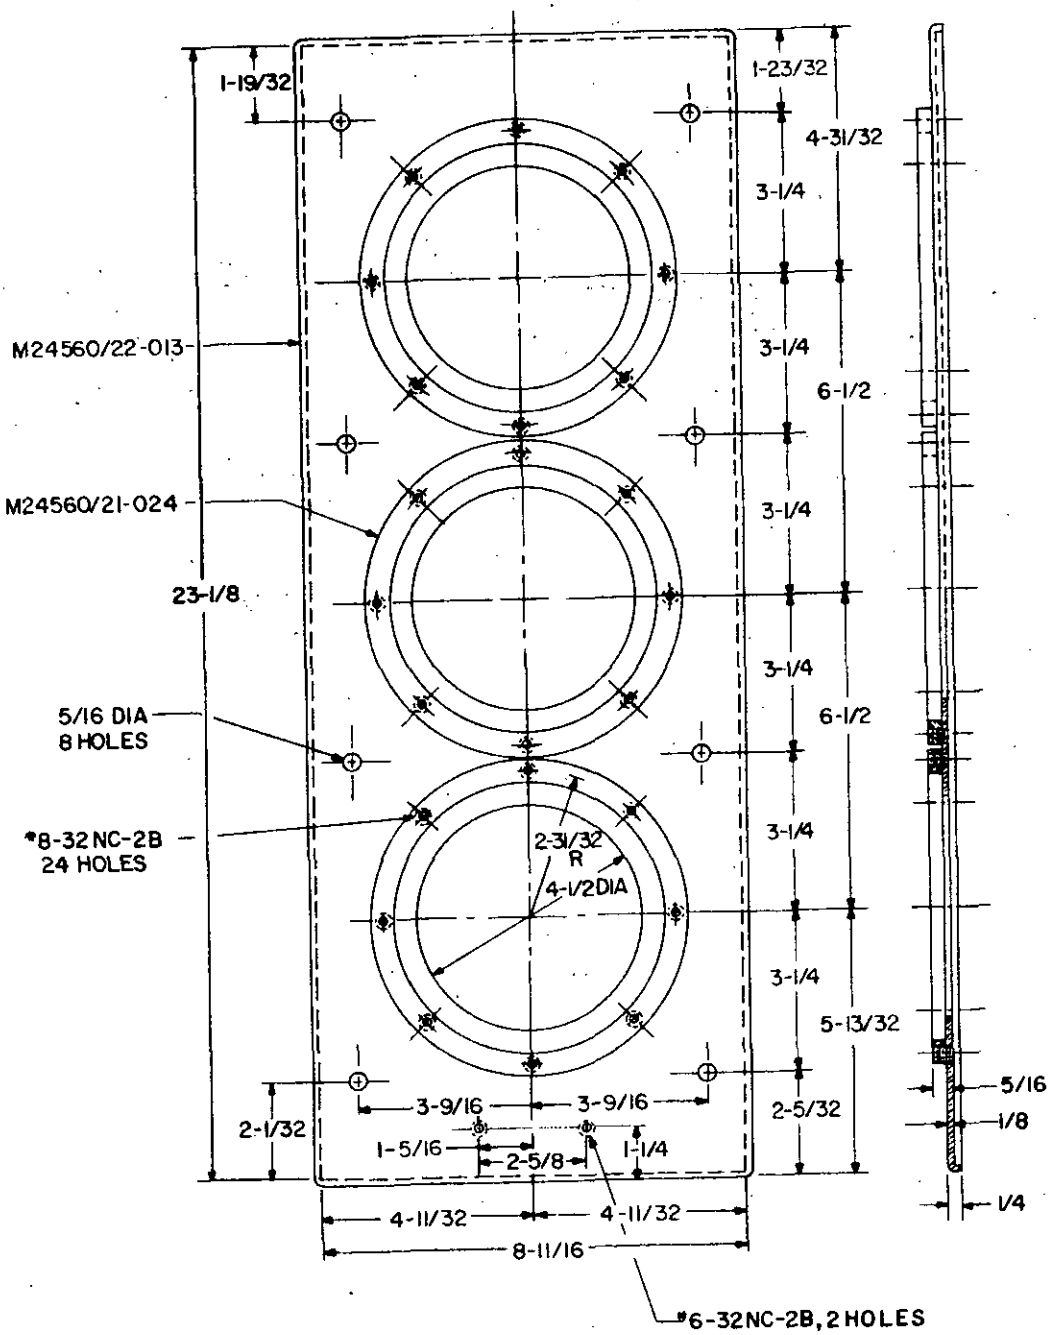

SH11430-2

M24560/22-014
FRONT ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

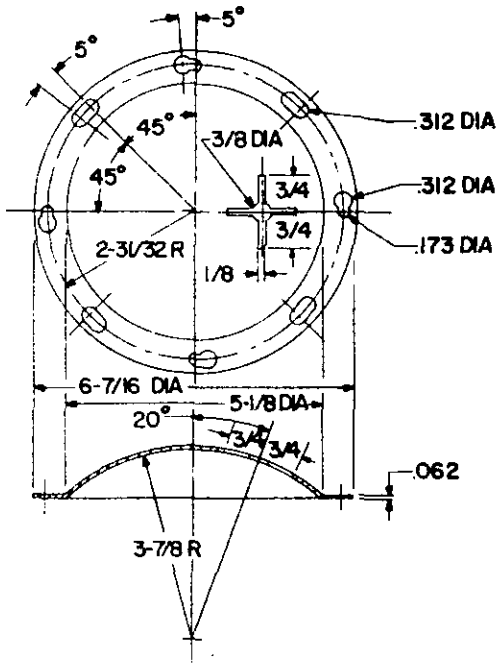

M24560/22-025
BLACKOUT SHIELD

TRAFFIC LIGHT
o MIL-L-24560/24 o
SYM. NO. 222

M24560/22-026
IDENTIFICATION PLATE

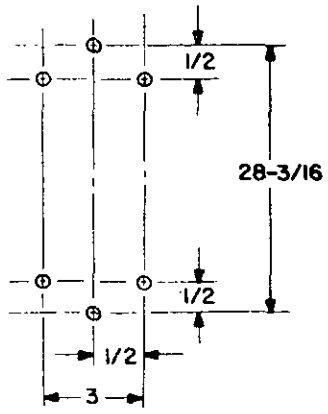

MOUNTING BOLTS SHALL BE 5/16-18

MOUNTING DIMENSIONS

SH11430-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGNS:
Electrical rating: 120 volts, 60 Hertz, 90 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (Type I)
Parts: See Table I
First Article: Examination of product, magentic permeability, insulation resistance, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

(a) Military part number: M24560/22-001 - (Light assembly - Sym 222)
(b) Supersedes NAVSHIPS Drawing 9000-S6505-74114
(c) Weight: The light assembly shall weigh 30 pounds maximum

NOTE:
1. Fasteners, M24560/22-015 shall be Lion Fasteners Part No. 5-0-200 manufactured by Lion Fastener Inc., Honeoye Falls, New York, or the equivalent.

TABLE I. Parts.

Part number[1/]	Part name	Quantity	Specification	Additional information
M24560/22-010	Housing Sheet	1	MIL-B-895	Brass
M24560/22-011	Gasket Angle (Side)	2	MIL-B-895	Brass
M24560/22-012	Housing Assembly	-	----	----
M24560/22-013	Front Plate	1	MIL-B-895	Brass
M24560/22-014	Front Assembly	-	----	----
M24560/22-015	Fastener (Complete)	8	COML	See Note 1
M24560/22-016	O-Ring	1	MIL-R-900	Rubber, 1/4 I.D. Length to Suit
M24560/22-017	Rivet	4	COML	Brass, 1/8 R.H. Length to Suit
M24560/22-018	Screw, R.H. Mach.	24	COML	Brass, #8-32 NC-2A x 1/2 Long
M24560/22-019	Screw, R.H. Mach.	2	COML	Brass, #8-32 NC-2A x 5/8 Long
M24560/22-020	Screw, R.H. Mach.	9	COML	Brass, #8-32 NC-2A x 7/8 Long
M24560/22-021	Nut, Hex	18	COML	Brass, #8-32 NC-2B
M24560/22-022	Washer, Shake Proof	35	COML	Steel, Zinc Finish
M24560/22-023	Cap Screw	12	COML	Brass, 1/4-20, NC-2A x 1.00 Long
M24560/22-024	Lockwasher	12	COML	Steel, 1/4 in, Zinc Finish
M24560/22-025	Blackout Shield	3	MIL-B-895	Brass
M24560/22-026	Identification Plate	1	MIL-P-15024	Copper Alloy, Type B, Normal Service of MIL-P-15024/5
M24560/22-027	Screw, R.H. Mach	2	COML	Brass, #6-32 NC-2A x 1/4 Long
M24560/21-012	Lamp Support (Upper)	2	MIL-B-895	Brass
M24560/21-013	Lamp Support (Lower)	1	MIL-B-895	Brass
M24560/21-015	Top Assembly	1	----	----
M24560/21-019	Bottom Assembly	1	----	----
M24560/21-020	Gasket Angle (End)	2	MIL-B-895	Brass
M24560/21-024	Lens Ring	3	MIL-B-895	Brass
M24560/21-026	Securing Ring	3	MIL-B-895	Brass
M24560/21-035	Bracket	1	MIL-B-895	Brass
M24560/21-036	Pad	2	MIL-B-895	Brass
M24560/21-040	Mounting Bracket	2	MIL-B-895	Brass
	Lamp	18	COML	15TC7
M950/5-1	Lampholder	3	MIL-L-970/5	
	Terminal Board	1	MIL-T-55164	M55164/16 Type 10TB12
M19622/1-002	Stuffing Tube	1	MIL-S-19622/1	
M24560/20-001	Lens	1	MIL-L-24560/20	Yellow
M24560/20-002	Lens	1	MIL-L-24560/20	Green
M24560/20-003	Lens	1	MIL-L-24560/20	Red

1/ Part numbers M24560/22-010 through M24560/22-027 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N267-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:59Z
Check the source to verify that this is the current version before use.