
MILITARY SPECIFICATION SHEET

Ⓐ LIGHT, NAVIGATION, RED AND CLEAR SYMBOL 193.1, RED AND GREEN-SYMBOL 194, 120 VOLTS, 180 WATTS, NINE LAMPS

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the light described herein shall consist of this document and the latest issue of MIL-L-24560(SH).

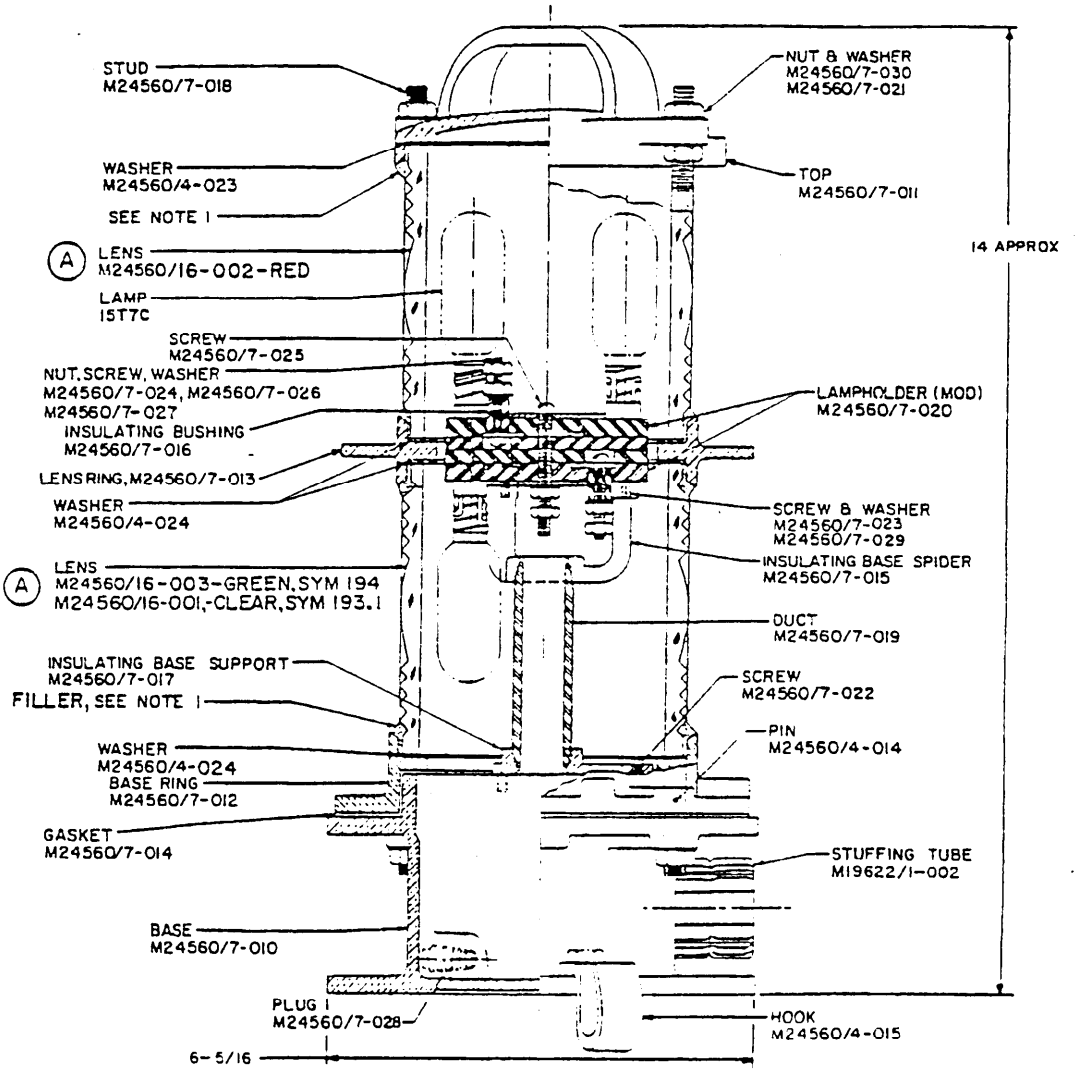

SH 11414A


Ⓐ M24560/7-001-SYM 194
M24560/7-002-SYM 193.1
ASSEMBLY DETAILS FOR SYMBOLS 193.1 AND 194

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.

Ⓐ Denotes changes

FSC 6220

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

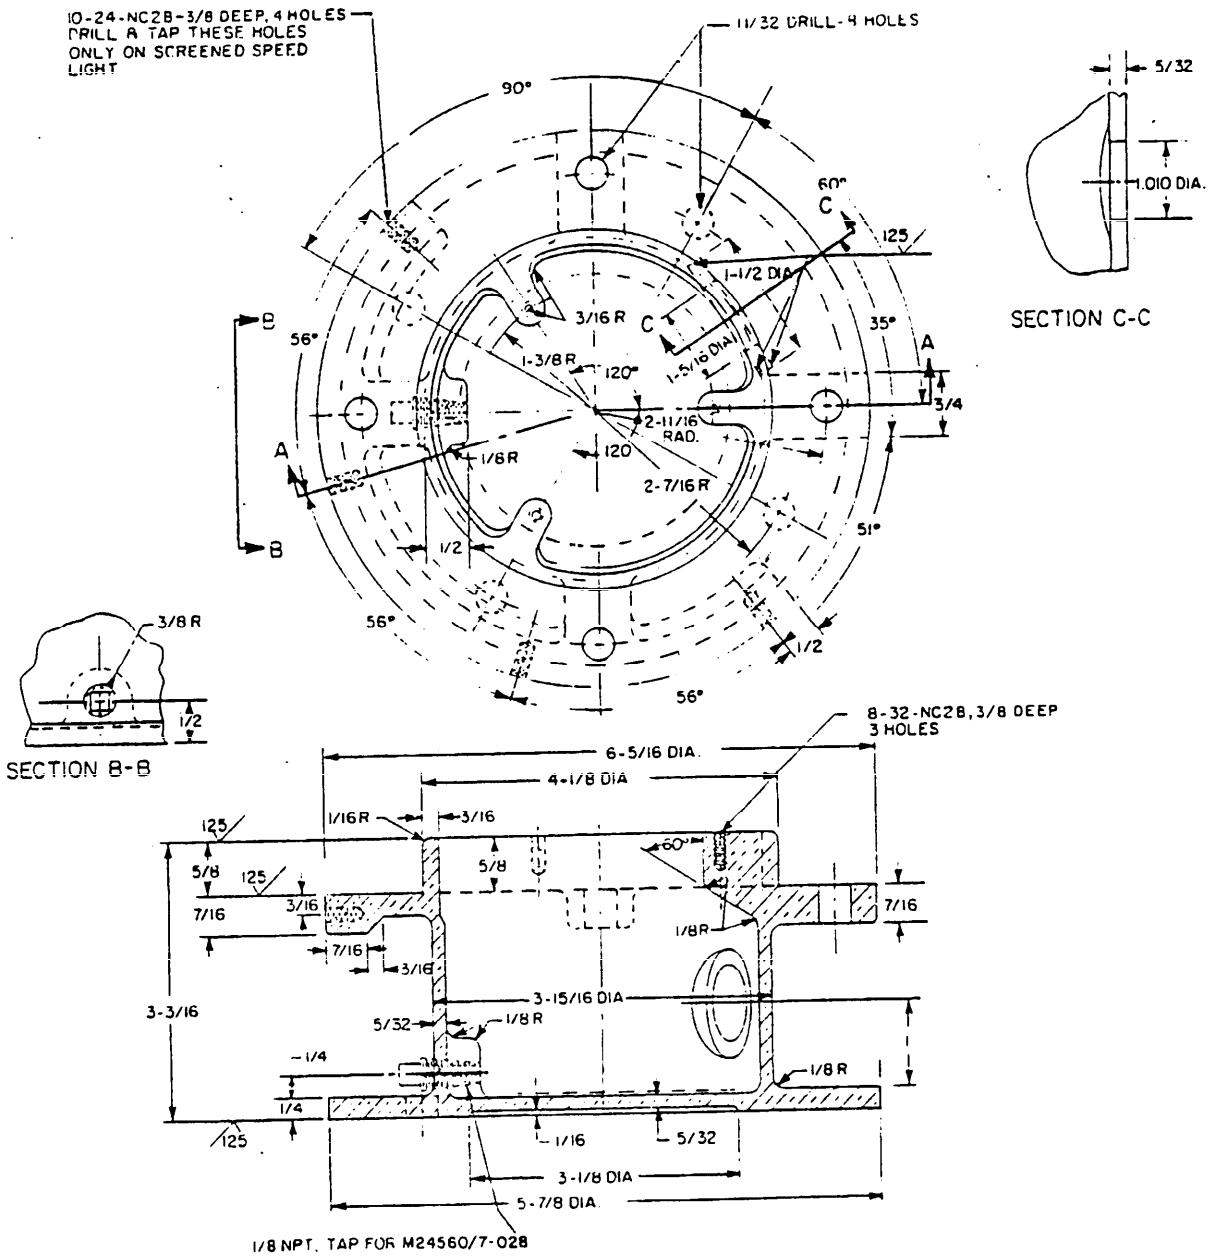


M24560/7-010

BASE

SH 11414-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

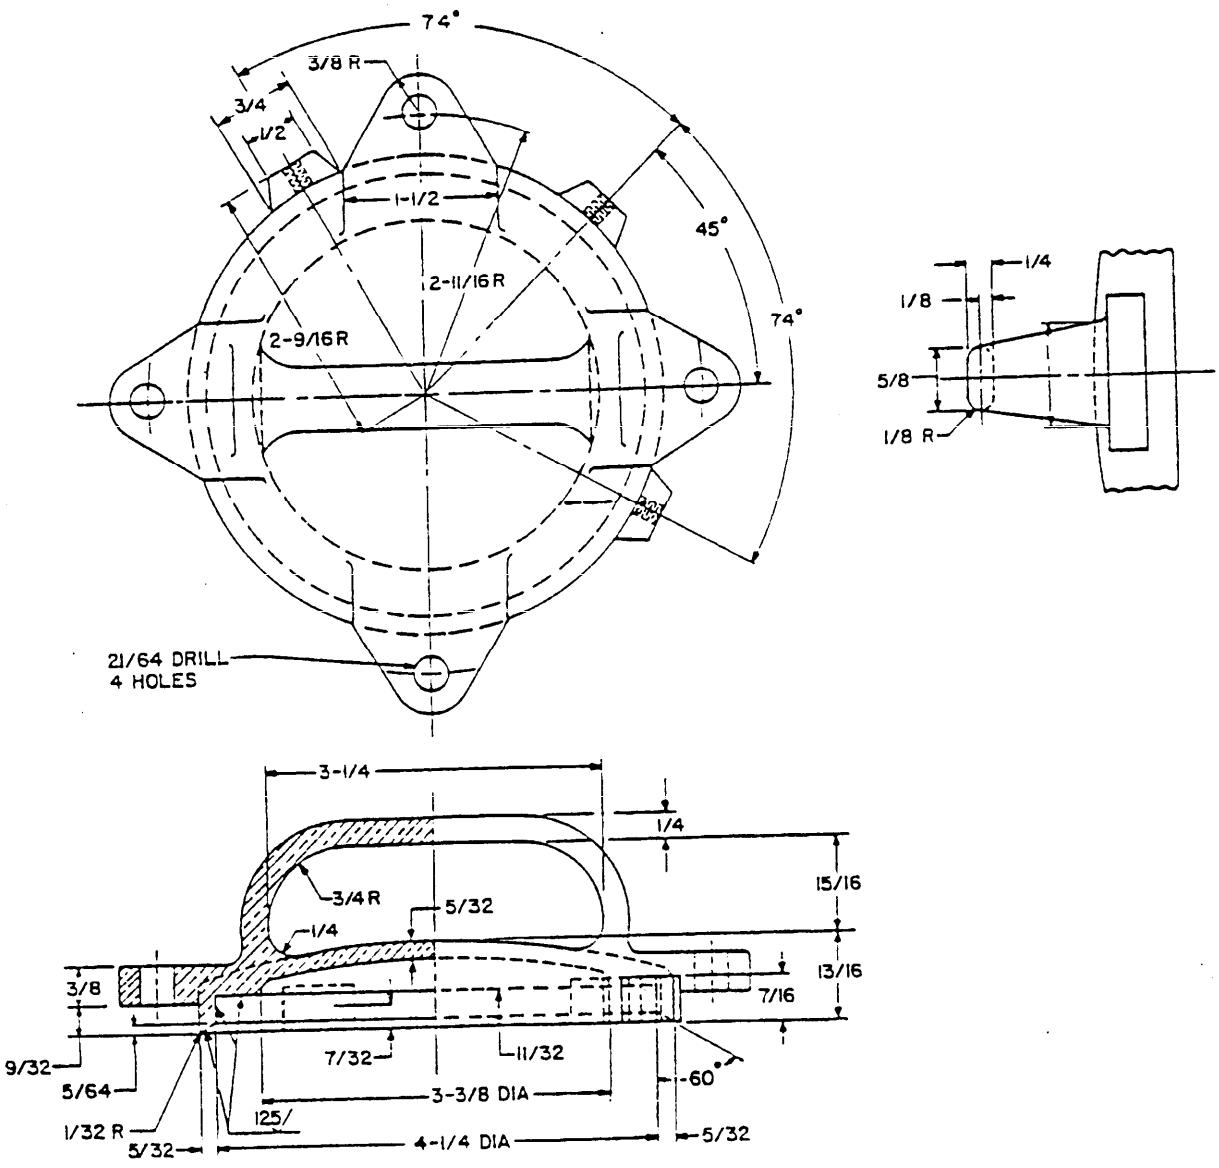


M24560/7-011
TOP

SH 11414-2

Source: https://assist.dla.mil -- Downloaded: 20261O-19T22:56Z
Check the source to verify that this is the current version before use.

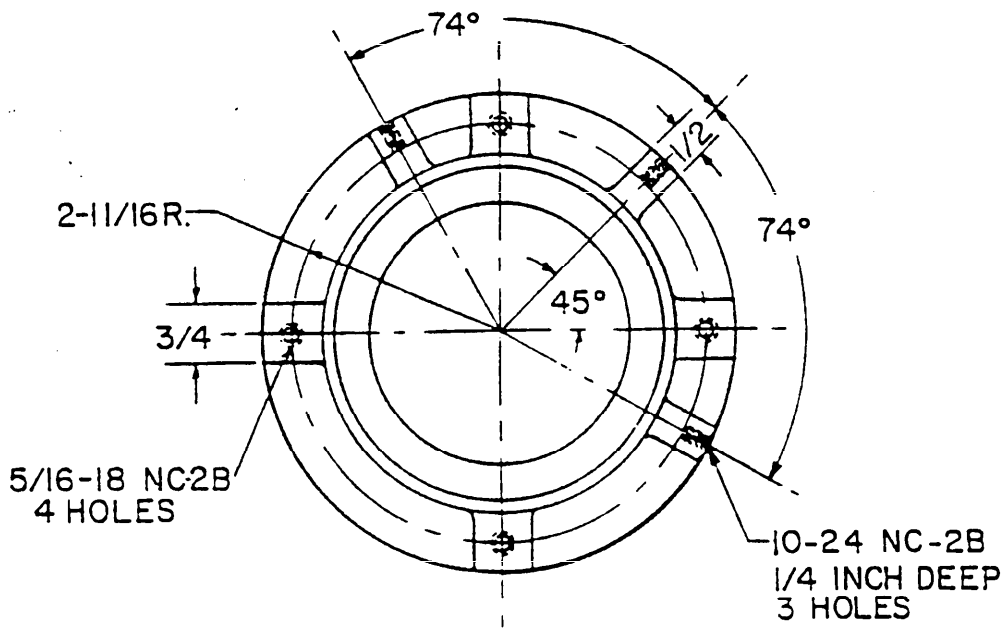


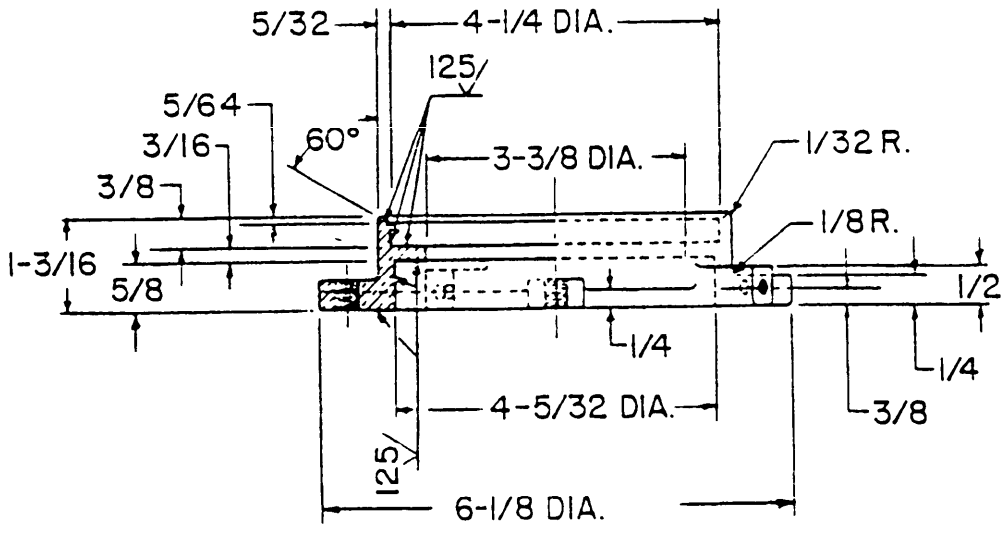


M24560/7-012
BASE RING

SH 11414-3

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

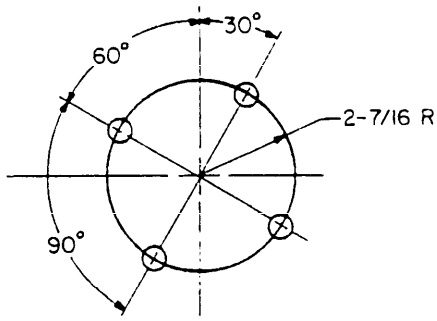



MOUNTING BOLTS SHALL BE 3/8-12 HEX HD

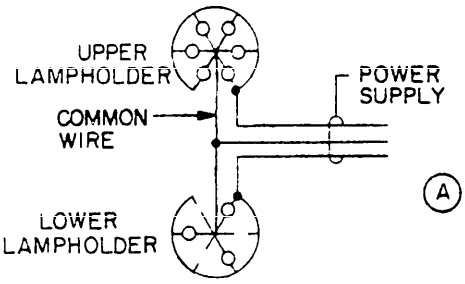

WIRING DIAGRAM

MOUNTING DIMENSIONS

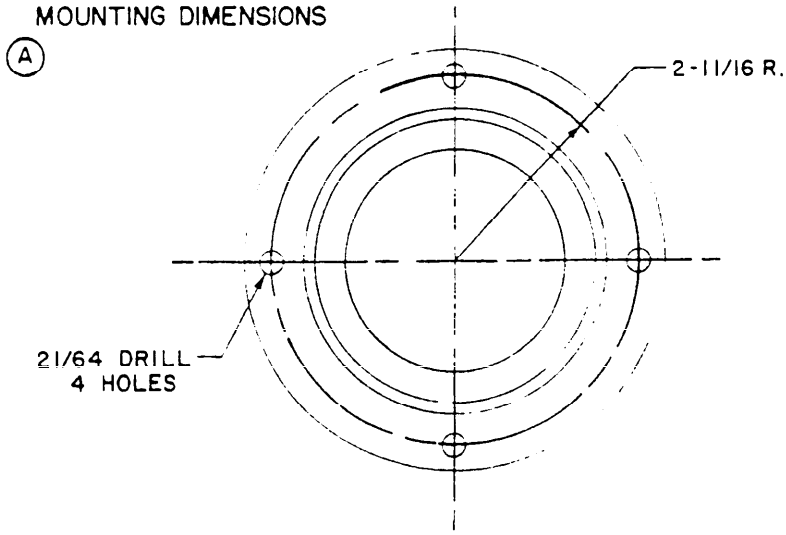


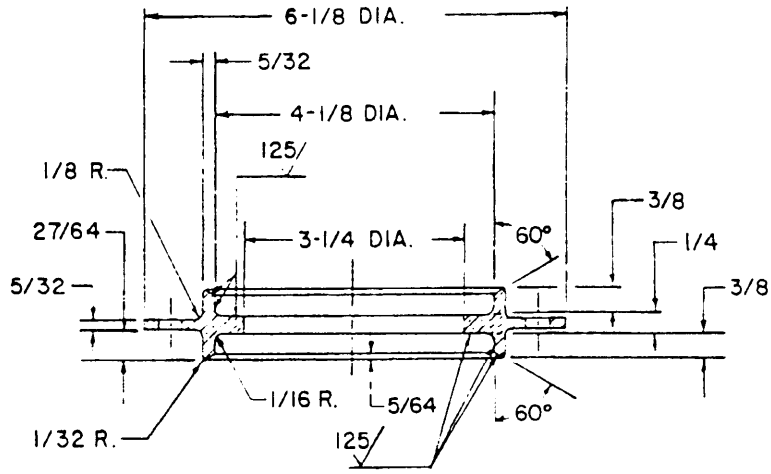


M24560/7-013
LENS RING


SH 11414-4A

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

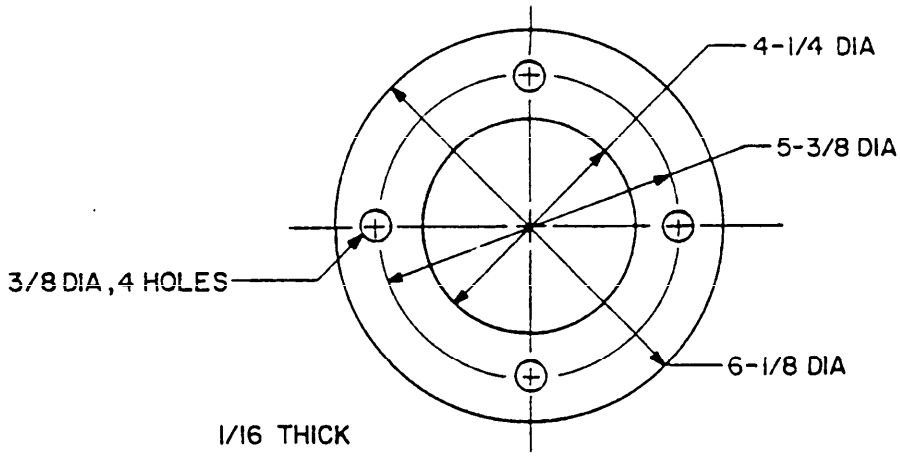

M24560/7-014
GASKET

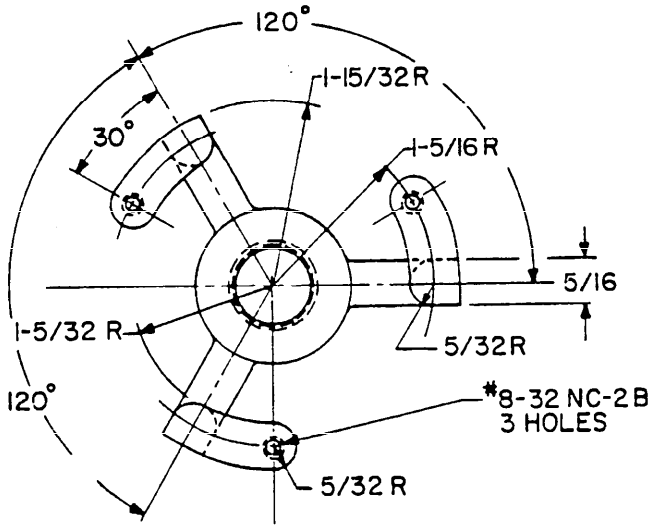


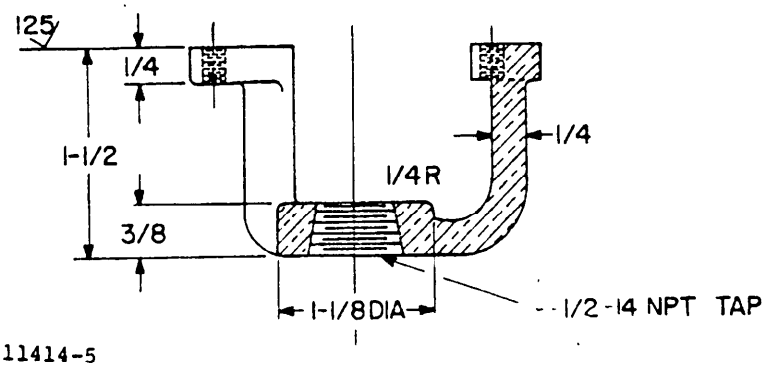


SH 11414-5


M24560/7-015
INSULATING BASE SPIDER

Source: https://assist.dla.mil -- Downloaded: 2026-04-19T22:56Z
Check the source to verify that this is the current version before use.



M24560/7-016
INSULATING BUSHING

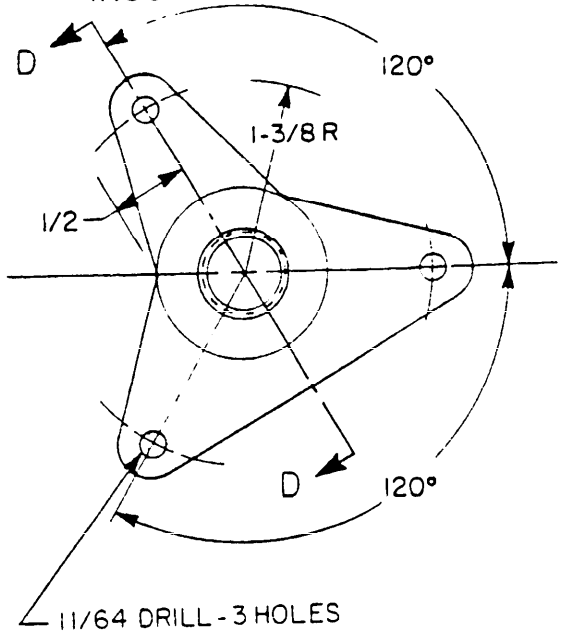


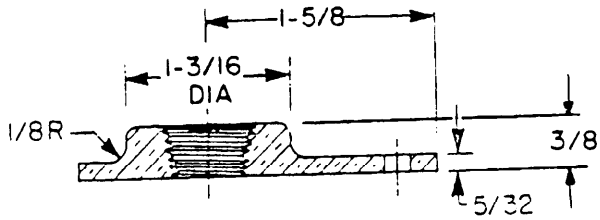


SECTION D-D
M24560/7-017
INSULATING BASE SUPPORT

SH 11414-6

Source: https://assist.dla.mil -- Downloaded: 20260-19T22:56Z
Check the source to verify that this is the current version before use.

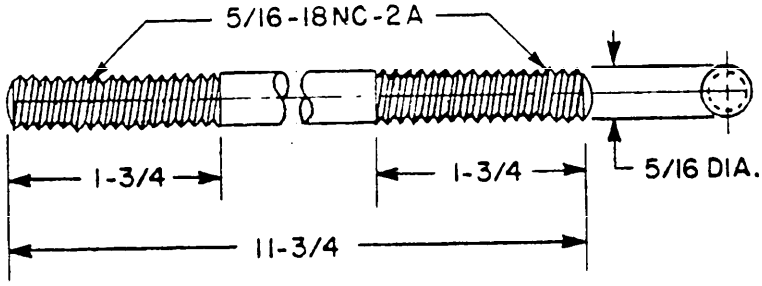

M24560/7-018
STUD

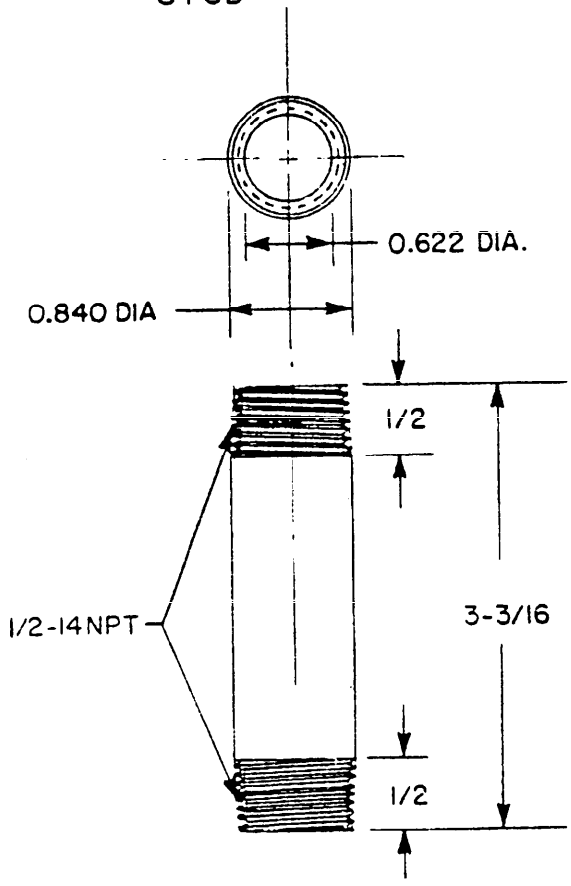


SH 11414-7


M24560/7-019
DUCT

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.


MODIFICATION TO LAMPHOLDER (M970/5-1)

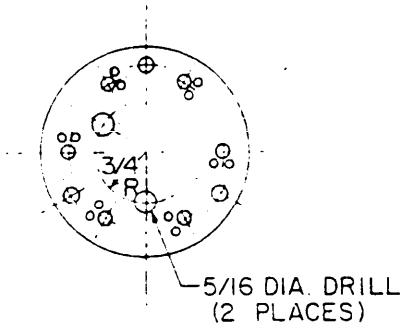

LOWER BASE OF LAMPHOLDER

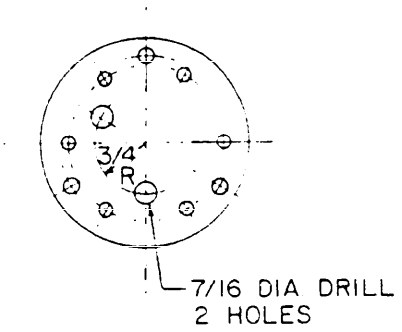

UPPER BASE OF LAMPHOLDER

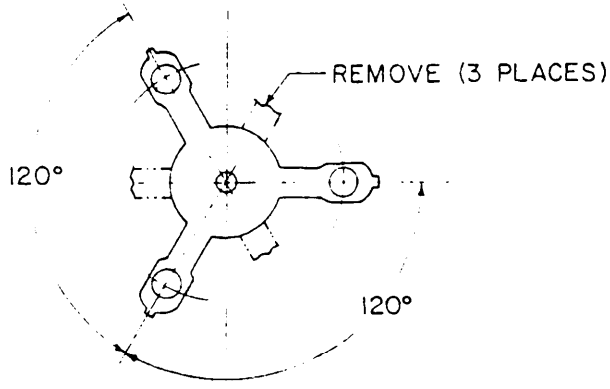

MODIFY CONTACT PLATE ON
LOWER SOCKET ONLY
LAMPHOLDER M24560/7-020

SH 11414-8

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 Hertz, 180 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (Type I)
Parts: See Table I
First Article: Examination of product, magnetic permeability, operation, insulation resistance, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosure.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

(a) Military part number: M24560/7-001 - (Light assembly - Sym 194)
M24560/7-002 - (Light assembly - Sym 193.1)
(A)
(b) Details for lights shown hereon were formerly covered by NAVSHIPS Drawing 4326-L
(A)
(c) Weight: The weight of this light shall be 32.3 pounds maximum.

NOTES:

1. The outer surface of the base, top, base ring and lens ring shall be given two coats of gray enamel of a good commercial grade, and the interior surfaces two coats of black insulating varnish MIL-V-1137 grade BA.

TABLE I. Parts.

Part number[1/]	Part name	Quantity	Specification	Additional information
M24560/7-010	Base	1	QQ-C-390	Bronze
M24560/7-011	Top	1	QQ-C-390	Bronze
M24560/7-012	Base Ring	1	QQ-C-390	Bronze
M24560/7-013	Lens Ring	1	QQ-C-390	Bronze
M24560/7-014	Gasket	1	MIL-R-900	Rubber sheet
M24560/7-015	Insulating Base Spider	1	QQ-C-390	Bronze
M24560/7-016	Insulating Bushing	1	MIL-P-79	GMG
M24560/7-017	Insulating Base Support	1	QQ-C-390	Bronze
M24560/7-018	Stud	4	QQ-B-637	Brass
M24560/7-019	Duct	1	WW-P-351	Brass
M24560/7-020	Lampholder (Modified)	2	MIL-L-970/5	M970/5-1 (Modified)
M24560/7-021	Washer, Lock	8	COML	Bronze, 5/16
M24560/7-022	Screw, Mach R. H.	3	COML	Brass, #8-32 NC-2A X 1/2 LG
M24560/7-023	Screw, Mach R. H.	3	COML	Brass, #8-32 NC-2A X 1/4 LG
M24560/7-024	Screw, Mach R. H.	2	COML	Brass, #6-32 NC-2A X 1 LG
M24560/7-025	Screw, Mach R. H.	1	COML	Brass, #6-32 NC-2A X 1 1/4 LG
M24560/7-026	Nut, Hex	6	COML	Brass, #6-32 NC-2B
M24560/7-027	Washer, Flat	3	COML	Brass, #6
M24560/7-028	Plug	1	COML	Brass, 1/8 NPT
M24560/7-029	Washer, Lock	3	COML	Phosphor Bronze #8
M24560/7-030	Nut, Hex	12	COML	Brass, 5/16 - 18 NC-2B
M24560/7-031	Washer, Lock	8	COML	Bronze, 5/16
M24560/4-014	Pin	4	QQ-B-626	Brass, 1/16 dia X length to suit
M24560/4-015	Hook	1	QQ-B-613	Brass
M24560/4-023	Washer (Upper)	2	COML	TEFLON
M24560/4-024	Washer (Lower)	2	COML	TEFLON
	Lamp	9	COML	15T7C
M19622/1-002	Stuffing Tube	1	MIL-S-19622/1	
(A) M24560/16-001	Lens	1	MIL-L-24560/16	Clear - for Symbol 193.1 only
M24560/16-002	Lens	1	MIL-L-24560/16	Red
(A) M24560/16-003	Lens	1	MIL-L-24560/16	Green - for Symbol 194 only

[1/] Part numbers M24560/7-010 through M24560/7-031 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N276)

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-L-24560/7A(SH)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 3112)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY

DOD 316

U.S. MAIL

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 3112)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.