
MILITARY SPECIFICATION SHEET

LIGHTS, NAVIGATION, STERN, CLEAR, BLUE AND YELLOW, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOLS 196.3, 196.4, AND 197.2

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the lights described herein shall consist of this specification and the latest issue of MIL-L-24560(SH).

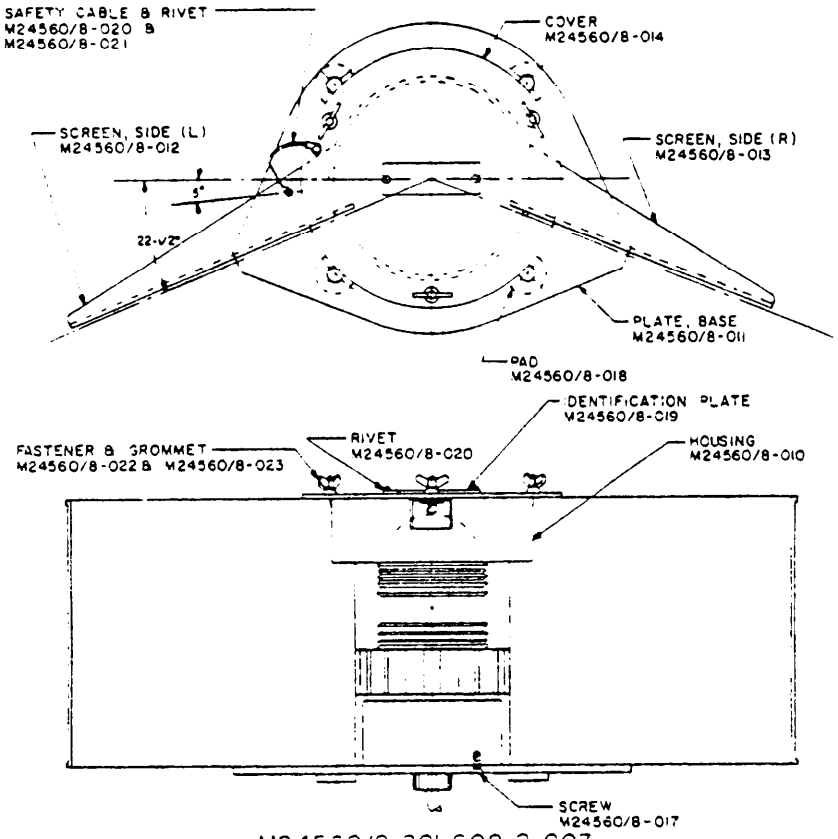

M24560/8-001,002 & 003
ASSEMBLY, STERN SYM 196.3,196.4 & 197.2

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.


(A) denotes changes.

FSC 6220


U.S. GOVERNMENT PRINTING OFFICE 1981—505-022 8223


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

6.1 It is understood that the lights offered



M24560/8-019
IDENTIFICATION PLATE

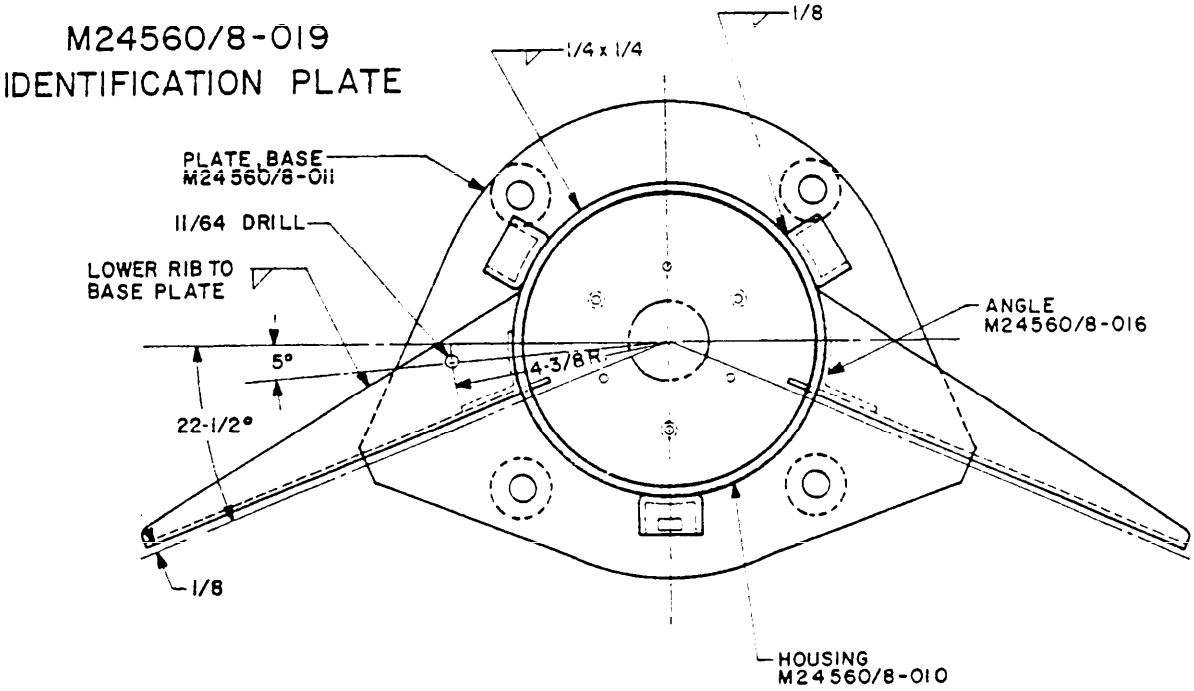


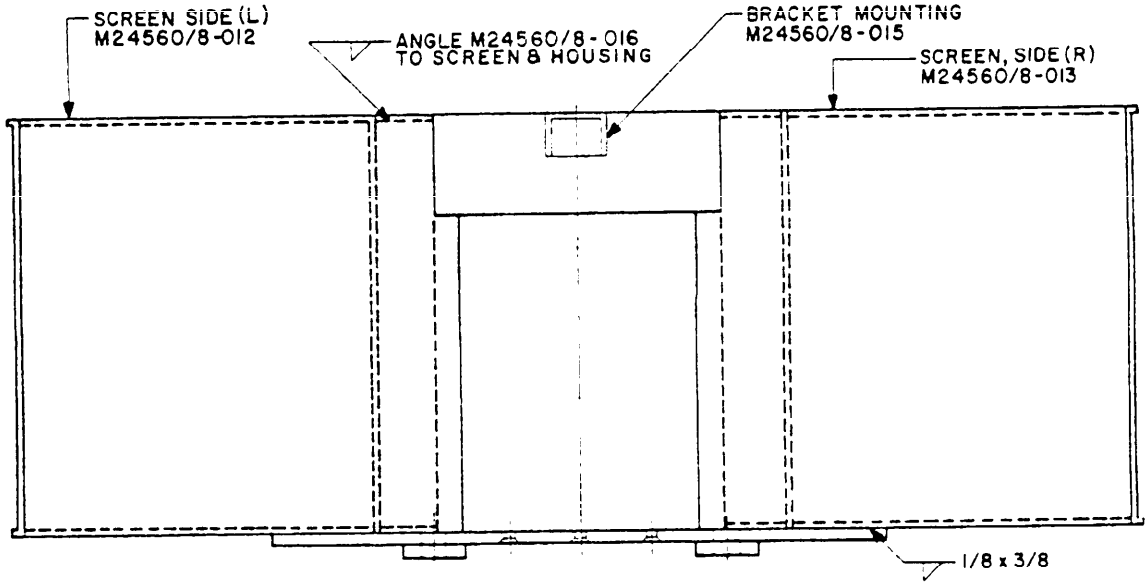


FABRICATION DETAILS
M24560/8-004

SH11415-1

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

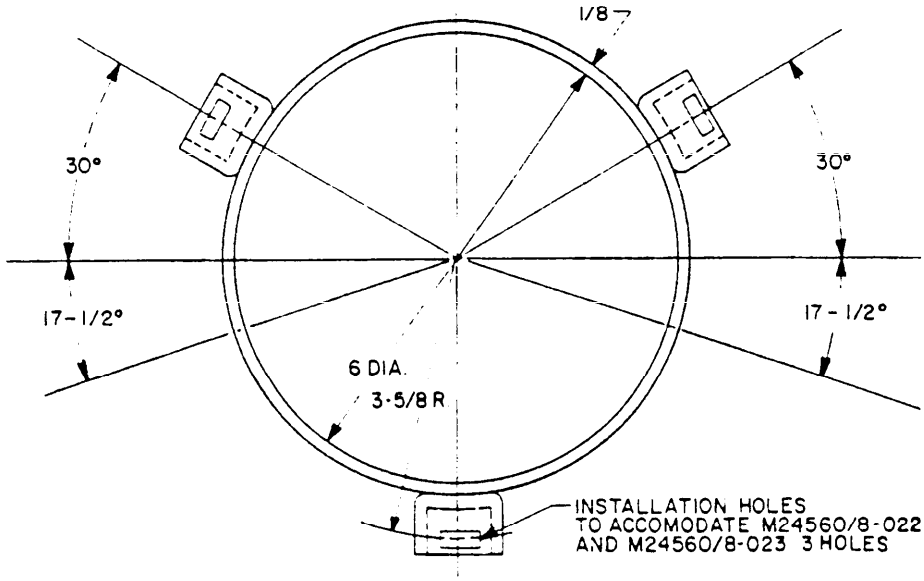


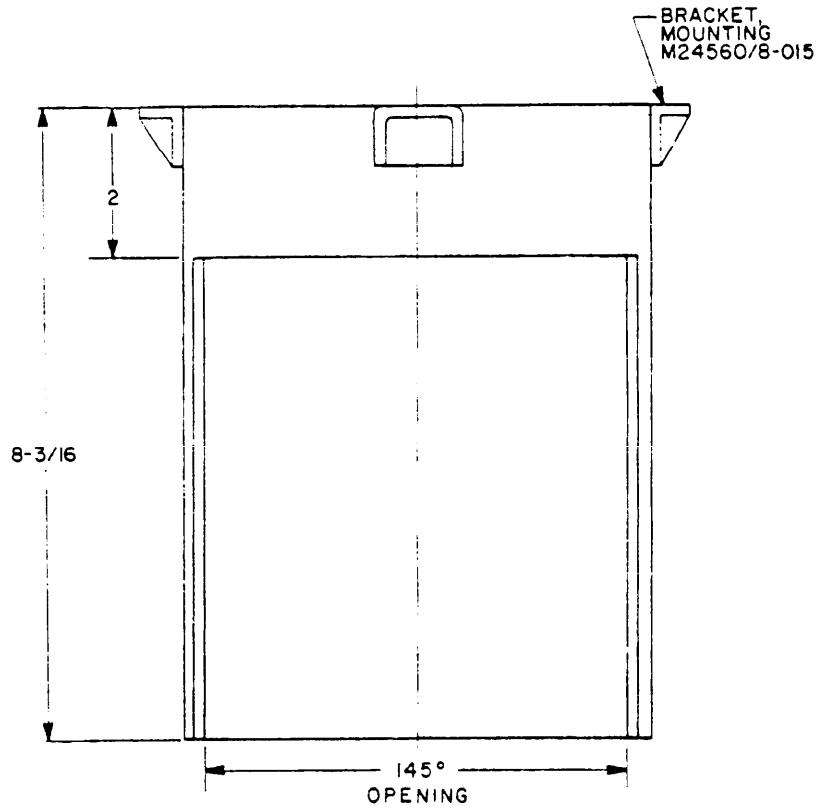

HOUSING
M24560/8-010

SH11415-2


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

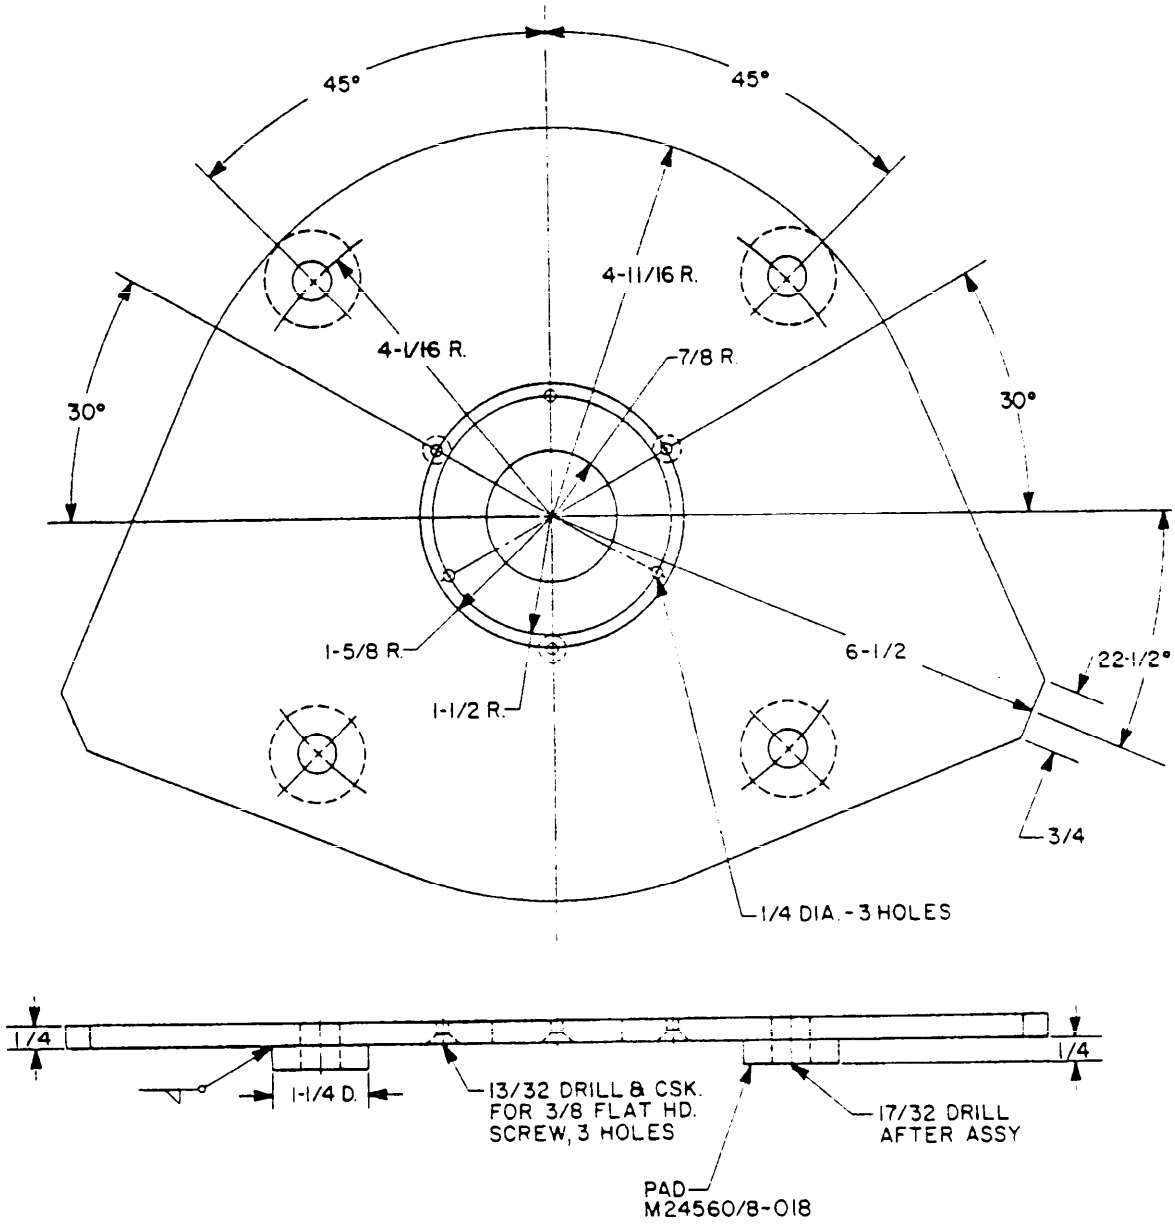


BASE PLATE
M24560/8-011

SH11415-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

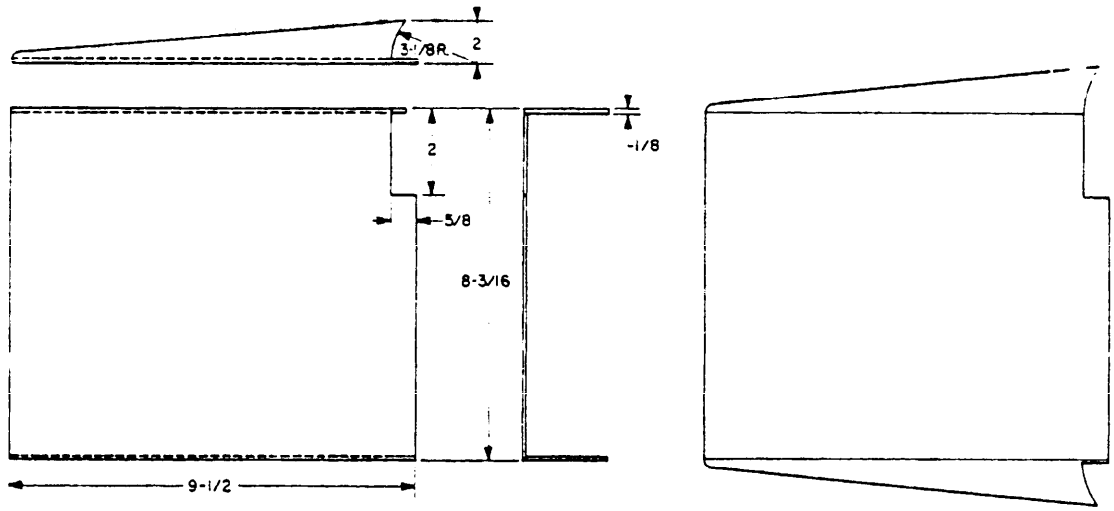


SIDE SCREEN-LEFT
M24560/8-012

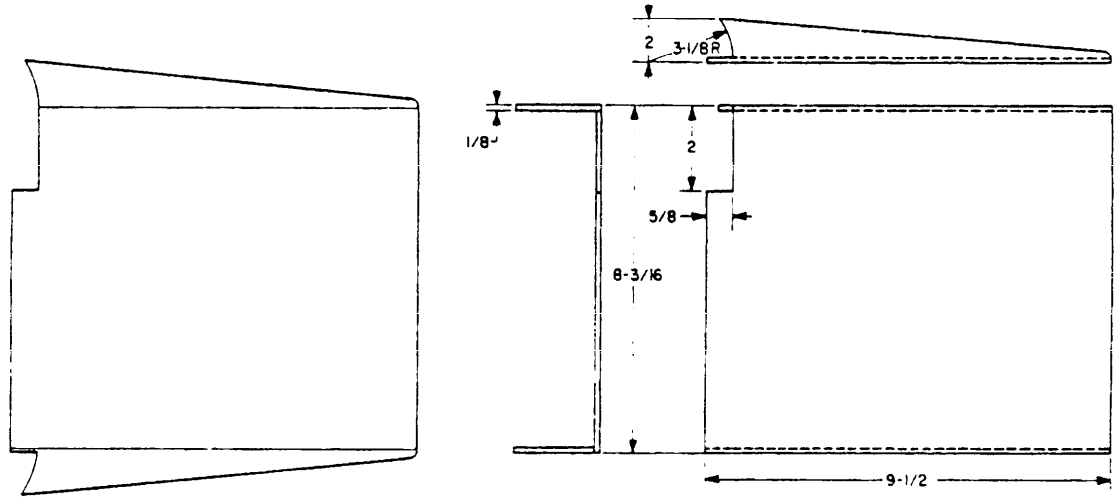

SIDE SCREEN-RIGHT
M24560/8-013


MOUNTING BOLTS SHALL BE 1/2-12 HEX. HD.

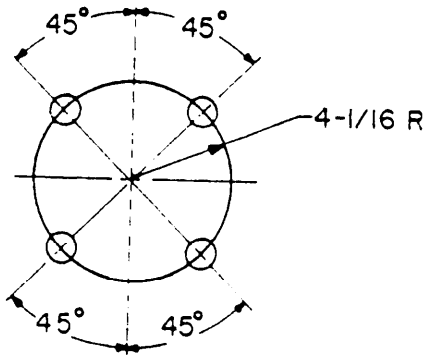


SH11415-4

MOUNTING DIMENSIONS


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

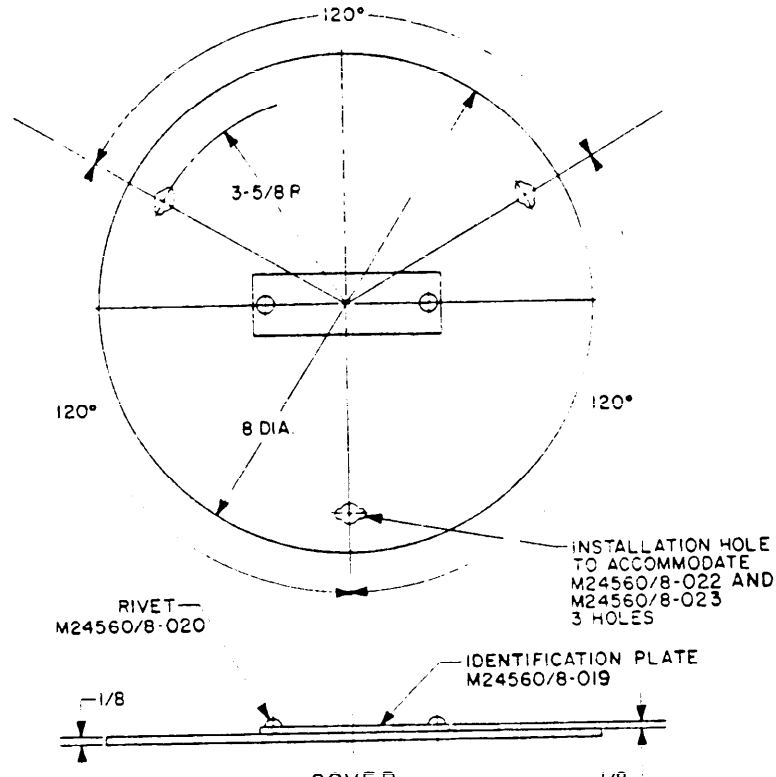


COVER
M24560/8-014

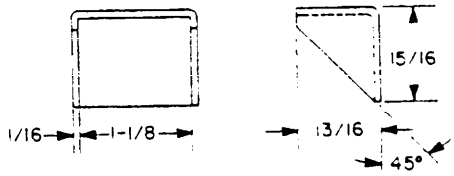

BRACKET
M24560/8-015





SH11415-5

ANGLE
M24560/8-016

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Electrical rating: 120 volts, 60 Hertz, 50 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (type I)
Parts: See table I
First article: Examination of product, magnetic permeability, operation, vibration, shock, salt spray

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

a. Military part number: M24560/8-001 - Light assembly - (Sym 196.3 - Clear)
M24560/8-002 - Light assembly - (Sym 197.2 - Blue)
M24560/8-003 - Light assembly - (Sym 196.4 - Yellow)
M24560/8-004 - Stern light shield assembly

b. Weight: The weight of each light assembly shall be 18 pounds maximum.

NOTES

1. Spring-lock fastener shall be 1/4 wing head with clinch grommet, Simmons Fastener, North Broadway, Albany, NY, or equal.
(A) 2. All illuminated surfaces of the shield assembly shall be given two coats of dull black paint per DOD-P-15146, Formula No. 104 and all other surfaces shall be given two coats of gray enamel of a good commercial grade.
(A) 3. Stern light shield assembly M24560/8-004 consists of all parts listed in table I less light assembly.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/8-010	Housing	1	COML	Al, 5052-H32
M24560/8-011	Base Plate	1	COML	AL, 5052-H32
M24560/8-012	Side Screen (Left)	1	COML	AL, 5052-H32
M24560/8-013	Side Screen (Right)	1	COML	AL, 5052-H32
M24560/8-014	Cover	1	COML	AL, 5052-H32
M24560/8-015	Bracket	3	COML	AL, 5052-H32
M24560/8-016	Angle	2	COML	AL, 5052-H32
M24560/8-017	Screw, Mach F.H.	3	COML	CRES, 3/8-16 NC-2A x 5/8 LG
M24560/8-018	Pad	4	COML	AL, 5052-H32
M24560/8-019	Identification Plate	1	MIL-P-15024	AL, Type H, normal service of MIL-P-15024/5
M24560/8-020	Rivet	4	COML	AL
M24560/8-021	Safety Cable	1	COML	
M24560/8-022	Fastener	3	COML	See Note 1
M24560/8-023	Grommet	3	COML	See Note 1
M24560/2-001	Light Assembly - Clear	1	MIL-L-24560/2	For use with Sym 196.3
M24560/2-004	Light Assembly - Blue	1	MIL-L-24560/2	For use with Sym 197.2
M24560/2-005	Light Assembly - Yellow	1	MIL-L-24560/2	For use with Sym 196.4

1/ Part numbers M24560/8-010 through M24560/8-023 assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N286)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.