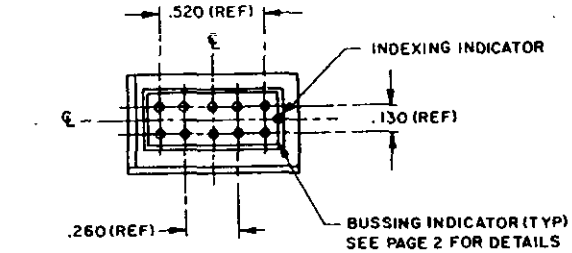
MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS, SECTIONAL, BUSSING MODULES, FEEDBACK TYPE, SIZE 20, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the block described herein shall consist of this document and the latest issue of Specification MIL-T-81714.



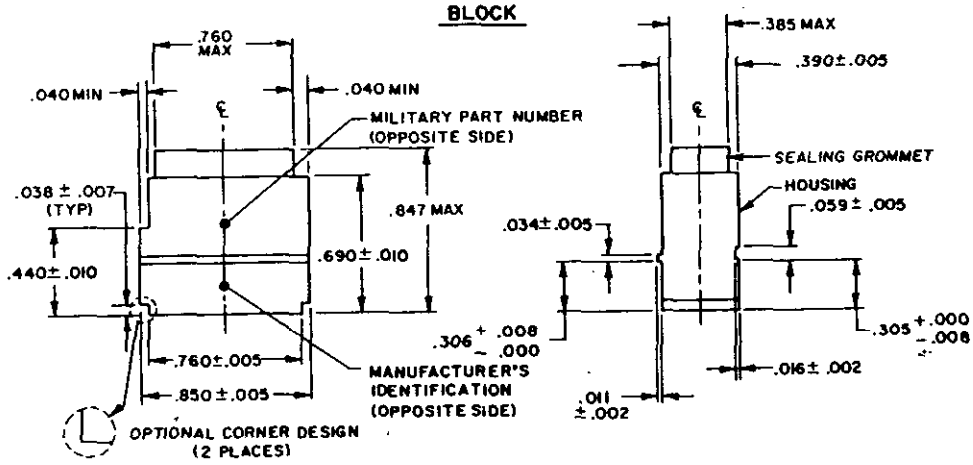


TABLE 1

Part Number 1/ 2/	Contacts Part Number	End Sealing Plugs Part Number
M81714/2-D**	M39029/1-101	MS27488-20

** Bussing Arrangement
1/ See Note 6
2/ See Note 7

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

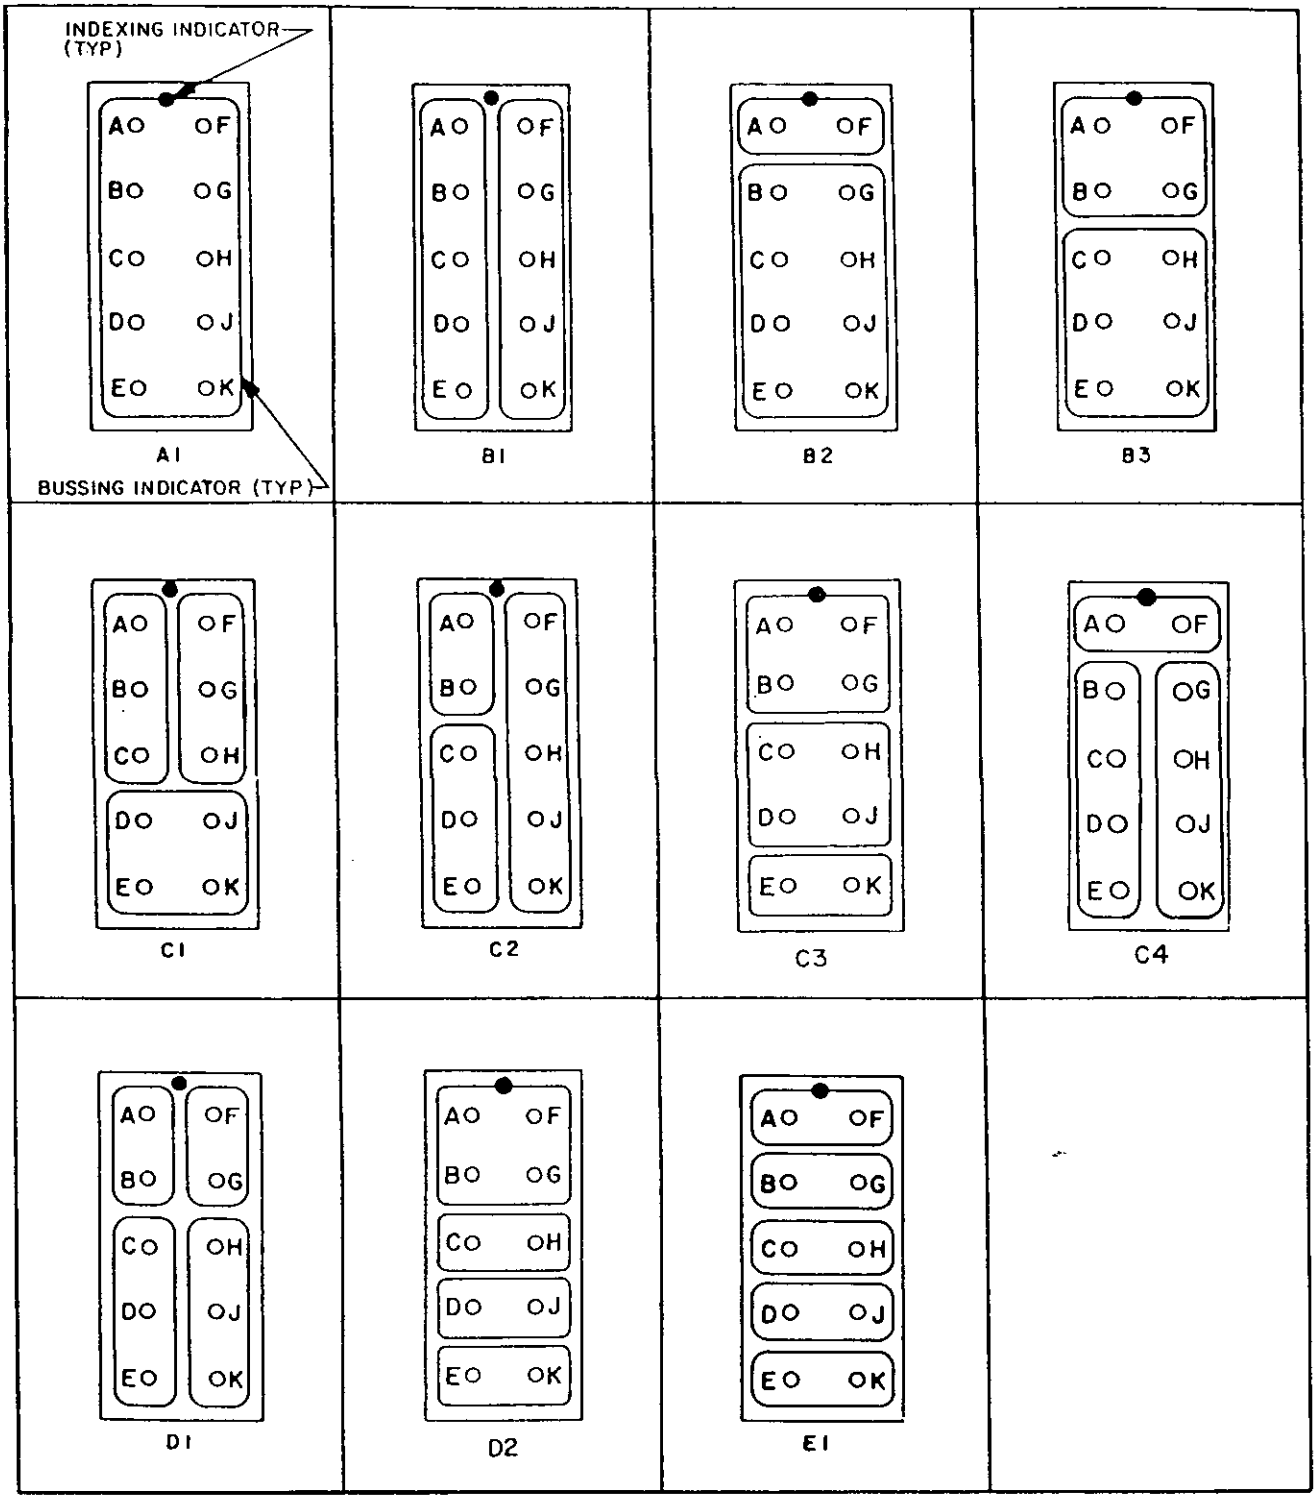


FIGURE 1. Bussing arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

Inch	mm	Inch	mm	Inch	mm	Inch	mm
.002	0.05	.034	0.86	.260	6.60	.520	13.21
.005	0.13	.038	0.97	.305	7.75	.690	17.53
.007	0.18	.040	1.02	.306	7.77	.700	17.78
.008	0.20	.048	1.22	.370	9.40	.760	19.30
.010	0.25	.059	1.50	.390	9.91	.847	21.51
.011	0.28	.130	3.30	.440	11.18	.850	21.59
.016	0.41						

NOTES:

1. Dimensions are in inches.


2. This block is designed for installation in MIL-T-81714/5 and MIL-T-81714/16 racks with its indexing indicator adjacent to the indexing rack rail. This block can also be installed in MIL-T-81714/29 brackets.

3. Tool for contact inserting/removal is M81969/14-02 or M81969/8-06 and shall be ordered separately.

4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

5. International interest, see specification MIL-T-81714.

6. The part number consists of the letter M, specification sheet number, block class, and bussing arrangement designator.

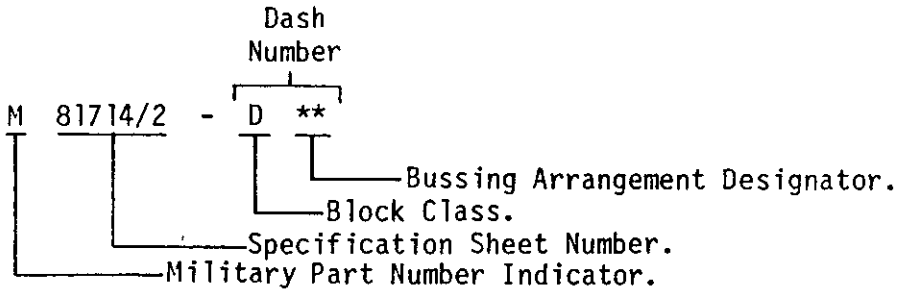

Part Number Example:

M81714/2-DA1

Size 20 feedback block, Class D, with one common bus as shown on Figure 1 bussing arrangement A1.

7. Classes A, B and C components are inactive for new design. Only Class D components shall be used for direct Government acquisition.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Navy - AS
(Project No. 5940-1000-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.