

FED. SUP CLASS
2330

USER ACTIVITIES:

REVIEWER ACTIVITIES:

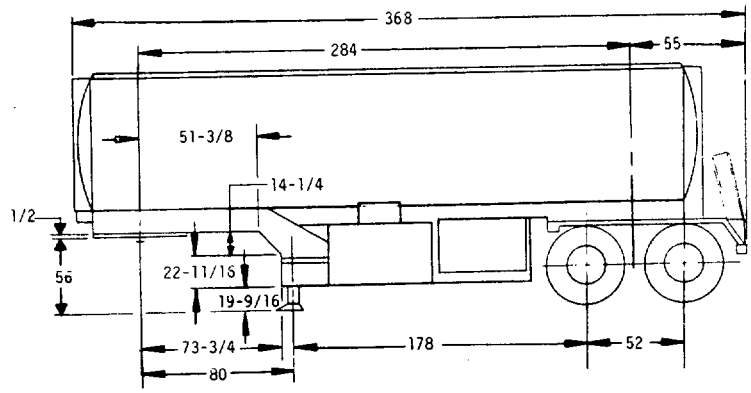

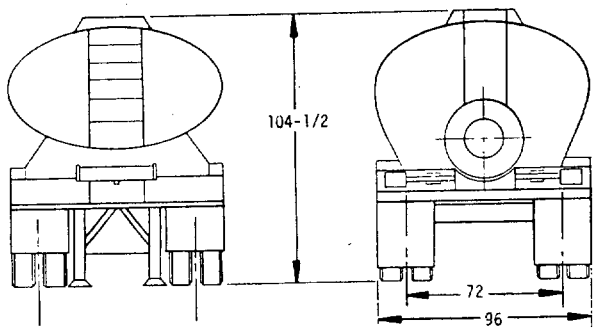

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS 52155-1	8750004

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, TANK: 5000 GAL, FUEL DISPENSING, M969.	MILITARY STANDARD MS52155(AT)
PROCUREMENT SPECIFICATION MIL-S-62180	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR 5 TON, 6 X 6
M818 SERIES

CURBWEIGHT:
W/O PAYLOAD 16,060 LBS

PAYLOAD:
(FUEL @ 6.79 LBS/GAL)
LOADED (3800) 25,800 LBS

GROSSWEIGHT:
W/PAYLOAD
LOADED (3800 GAL) 41,860 LBS

GROSSWEIGHT OF TRACTOR (M818), SEMITRAILER, W/O PAYLOAD 36,060 LBS
GROSSWEIGHT OF TRACTOR (M818), SEMITRAILER, W/PAYLOAD (5000 GAL) 71,580 LBS

WEIGHT DISTRIBUTION: (SEMITRAILER W/M818)

	W/O PAYLOAD
FRONT AXLE, TRACTOR M818	10,200
REAR BOGIE, TRACTOR M818	14,880
KINGPIN, SEMITRAILER	5,080
REAR BOGIE, SEMITRAILER	10,980
(W/5000 GAL PAYLOAD)	
FRONT AXLE, TRACTOR M818	10,710
REAR BOGIE, TRACTOR M818	30,090
KINGPIN, SEMITRAILER	20,800
REAR BOGIE, SEMITRAILER	30,780

CENTER OF GRAVITY:	VERTICAL	HORIZONTAL FROM KINGPIN
EMPTY	40	211
LOADED	64	187-1/2

DEPARTURE ANGLE: 60°

FORDING DEPTH: 24 IN MAX

MILITARY VEHICLE CLASSIFICATION:

	EMPTY	LOADED	HIGHWAY
M818&M967	14	25	30
M967	6	18	22

ENGINE:
TYPE (ONAN) 4 CYL, 4 CYCLE, DIESEL, AIR COOLED
HORSEPOWER 27.5
BORE 3.25
STROKE 3.625

DESCRIPTION:
THE M969 IS A 5000 GALLON FUEL DISPENSING SEMITRAILER USED PRIMARILY FOR AUTOMOTIVE REFUELING. THE M969 CAN BE LOADED THROUGH THE BOTTOM OR THE TOP FILL OPENING. THE 4-CYLINDER DIESEL ENGINE AND PUMP ASSEMBLY PROVIDE SELF LOAD/UNLOAD CAPABILITY. THE TRAILER HAS A STAINLESS STEEL, SINGLE COMPARTMENT TANK OF 5000 GALLON CAPACITY, PLUS 3% CAPACITY FOR PRODUCT EXPANSION. THE CHASSIS IS OF WELDED STEEL CONSTRUCTION AND EQUIPPED WITH FULL TANDEM AXLES AND MANUALLY OPERATED LANDING GEAR.

THE M969 IS EQUIPPED WITH PRESSURE AND VACUUM VENTS, HOSE TROUGHS, SEALED MAN HOLE, CALIBRATED GAUGE, BULK FUEL HOSES, PORTABLE GROUNDING ROD, STATIC GROUND REEL, AND SPARE TIRE. A LADDER IS PROVIDED AT THE FRONT OF THE SEMITRAILER FOR ACCESS TO THE TOP MANHOLE. A VAPOR RECOVERY SYSTEM, REQUIRED IN CERTAIN AREAS, CAN BE INSTALLED ON THE M969.

SHIPPING DATA:

CUBIC FEET	2200
SQUARE FEET	250
LENGTH	368 IN
WIDTH	96 IN
HEIGHT	104-1/2 IN
HEIGHT (REDUCIBLE BY DEFLATING TIRE)	102 IN

TIRES:

SIZE	11.00 x 20 - 12 PLY
TREAD	NDCC
QUANTITY	8 + 1 SPARE
PRESSURE	75 TO 95 PSI

ELECTRICAL SYSTEM: ENGINE

TYPE	12 V DIRECT CURRENT
ALTERNATOR	65 AMPS, BELT DRIVE
BATTERY (2)	12 V, CONNECTED IN PARALLEL

ELECTRICAL SYSTEM: - VEHICLE
VOLTAGE 24 VOLT

AXLE TYPE: FULL FLOATING TANDEM
18,000 LB CAPACITY

BRAKES: SERVICE QTY; 4 ACTUATION; AIR/WEDGE (2 PER AXLE END) 75-95 PSI

LANDING LEG: ADJUSTABLE, CRANK OPERATED

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH 48090.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS 52155-1	8750004

P.A. ARMY-AT
Other Cust

TITLE
SEMITRAILER, TANK: 5000 GAL, FUEL DISPENSING, M969.

MILITARY STANDARD
MS52155(AT)

PROCUREMENT SPECIFICATION
MIL-S-62180

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.