
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, BOX MOUNTING FLANGE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-38999.

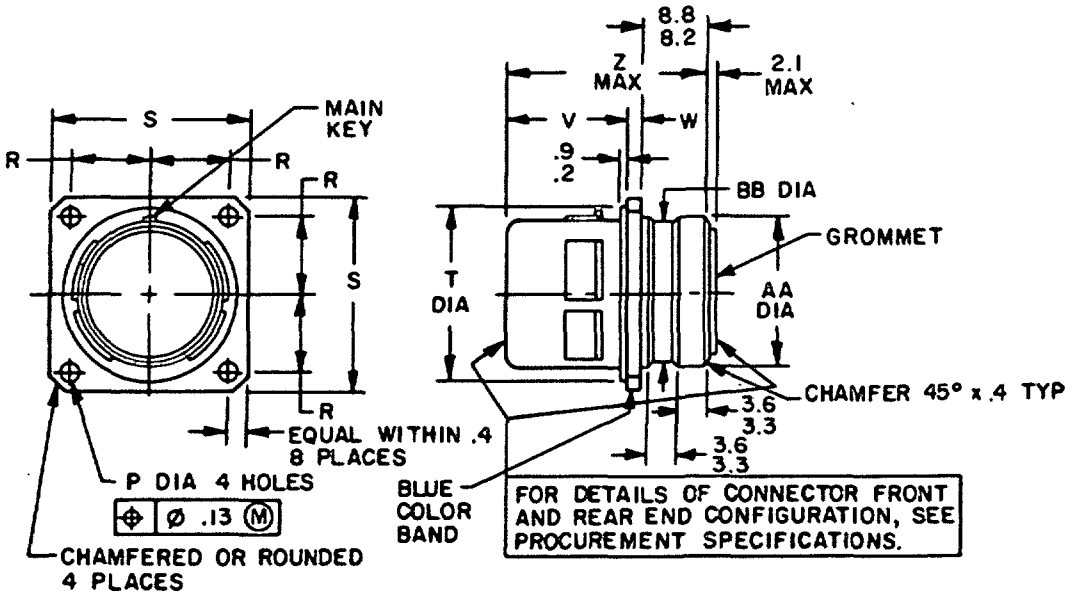

Shell Size	Shell Size Code	AA DIA	BB DIA	P DIA	R BSC	S	T DIA	V	W	Z MAX
11	B	14.7 14.3	13.6 13.2	3.5 3.1	10.31	26.7 25.6	20.15 19.76	20.8 19.2	2.6 2.1	32.0
13	C	17.6 17.2	16.5 16.1		11.51	29.1 28.0	23.35 22.96			
15	D	20.8 20.4	19.6 19.2		12.31	31.5 30.4	26.52 26.13			
17	E	24.0 23.6	22.8 22.4		13.49	33.9 32.8	29.72 29.33			
19	F	26.7 26.3	25.5 25.1		14.68	37.1 36.0	32.87 32.48			
21	G	29.8 29.4	28.7 28.3		15.88	40.2 39.1	36.05 35.66		3.4 2.9	
23	H	33.0 32.6	31.9 31.5	4.0 3.6	17.46	43.4 43.3	39.22 33.83			
25	J	36.2 35.8	35.0 34.6		19.05	46.6 45.5	42.40 42.01			

NOTE: Dimensions are in millimeters.

FIGURE 1. Receptacle, classes C, F, and W.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

Requirements:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with: DOD-C-38999/46 and /47.

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

Part number example: D38999/ 42 F A 35 P N

- DOD No. prefix
- Specification sheet No.
- Class
- Shell size code
- Insert arrangement
- Contact style
- Polarizing position:
  - N is required for normal position

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Navy - AS

(Project 5935-2096-8)

☆U.S. GOVERNMENT PRINTING OFFICE: 1978 — 703-122/1062

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.