INCH POUND
MIL-PRF-3098/70C
1 October 1997
SUPERSEDING
MIL-C-3098/70B (USAF)
11 April 1975

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR95/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 2.0 MHz to 9.25 MHz; fundamental; noncontrolled; antiresonance.

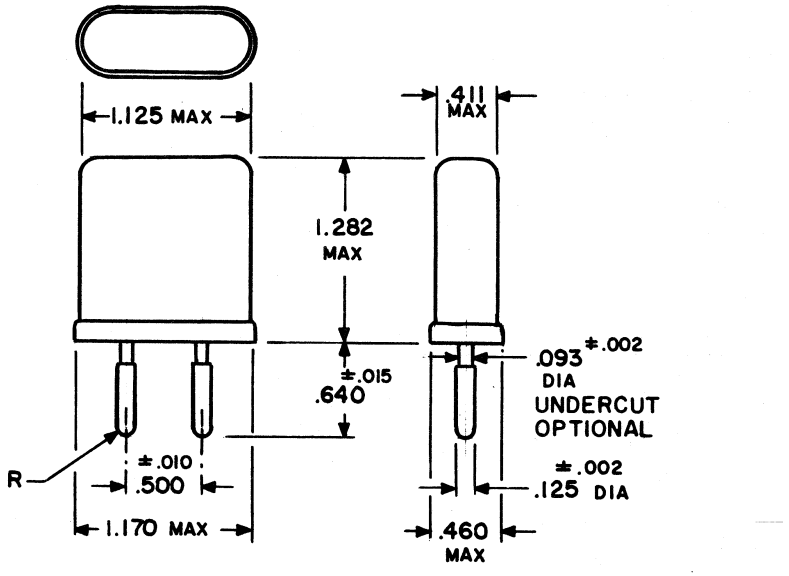

Inches	mm	Inches	mm	Inches	mm
.002	.05	.125	3.18	.640	16.26
.010	.25	.411	10.44	1.125	28.58
.015	.38	.460	11.68	1.170	29.72
.093	2.36	.500	12.70	1.282	32.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR95/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 2.0 MHz to 9.25 MHz, inclusive.

Mode of oscillation: Fundamental.

Rated drive level: 1.0 mW, maximum.

Antiresonance, load capacitance: 91.0 pF ±0.5 pF.

Operating temperature range (noncontrolled): -35°C to +75°C, inclusive.

Frequency tolerance: ±50 parts per million (ppm).

Equivalent resistance: See table I.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±15 percent, or 2 ohms, whichever is greater.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±15 percent, or 2 ohms, whichever is greater.

Temperature cycling:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±15 percent, or 2 ohms, whichever is greater.

Aging:

Frequency change permitted: ±5 ppm.

TABLE I. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
MHz	Ohms
2.00 to 4.75	120
4.75+ to 6.00	75
6.00+ to 7.50	50
7.50+ to 10.00	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air force - 85

Review activities:
Air Force - 11, 17, 19, 99

Preparing activity:
DLA - CC

(Project 5955-0697-42)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.