DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS UNLIMITED. AMSC N/A PREPARING ACTIVITY - NAVY - AS

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE.—This drawing was approved by joint action of the Air Force and Navy Department as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown.

FSC 4030

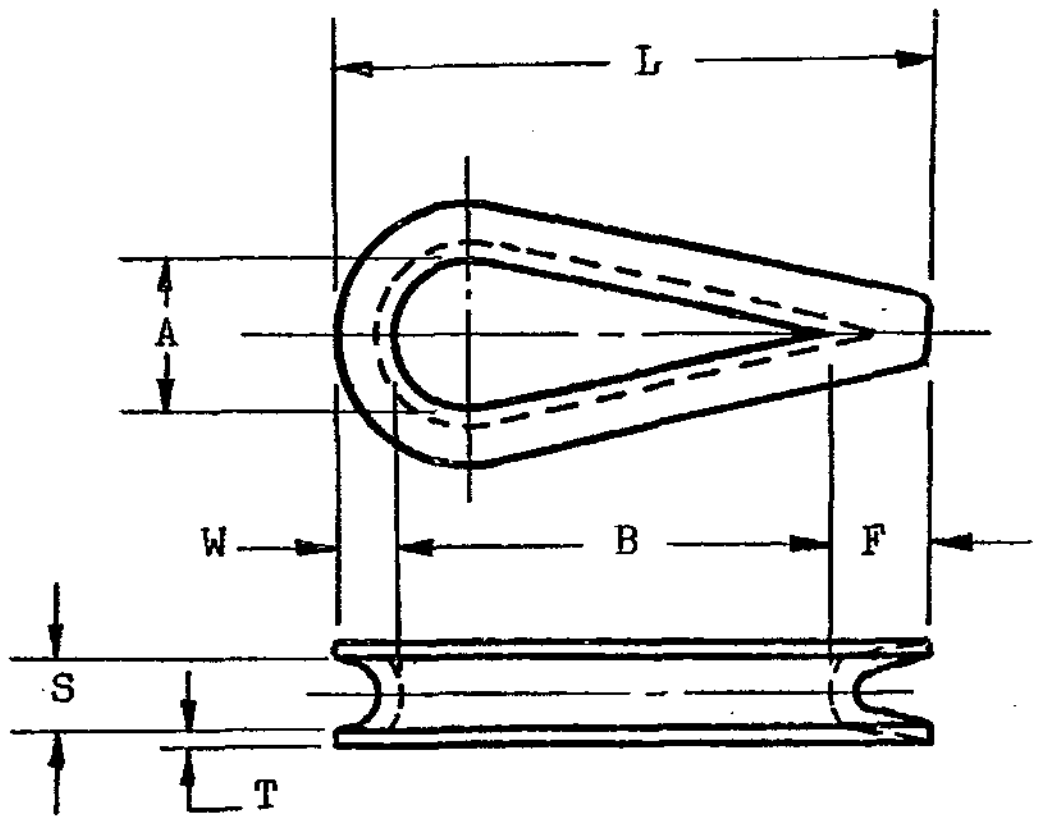

AN PART NO.			CABLE DIA	A	B	F MIN	L APPROX	S +1/64 -0	T	W +1/64 -0
LOW CARBON STEEL	CORROSION RESISTING STEEL	PHOSPHOR BRONZE								
AN100-3	AN100C-3	AN100B-3	1/16 5/64	.350	45/64	3/16		3/32	.032±.003	5/64
AN100-4	AN100C-4	AN100B-4	3/32 7/64 1/8	.350	45/64	7/32		9/64	.032±.003	5/64
AN100-5	AN100C-5	AN100B-5	5/32	.400	51/64	7/32		11/64	.032±.003	7/64
AN100-6	AN100C-6	AN100B-6	3/16	.500	1	5/16		13/64	.032±.003	9/64
AN100-7	AN100C-7	AN100B-7	7/32	.600	1-13/64	3/8		15/64	.032±.003	5/32
AN100-8	AN100C-8	AN100B-8	1/4	.700	1-13/32	13/32		17/64	.032±.003	11/64
AN100-9	AN100C-9	AN100B-9	9/32	.800	1-39/64	13/32		19/64	.040±.004	13/64
AN100-10	AN100C-10	AN100B-10	5/16	.900	1-51/64	7/16		21/64	.040±.004	7/32
AN100-12	AN100C-12	AN100B-12	3/8	1.000	2	5/8		25/64	.060±.004	17/64
AN100-14	AN100C-14	AN100B-14	7/16	1.125	2-1/4	13/16		29/64	.080±.004	21/64
AN100-16	AN100C-16	AN100B-16	1/2	1.250	2-1/2	1		33/64	.080±.004	13/32
(a) AN100-18			9/16	1.500 (MIN)	2-3/4 (MIN)		4	37/64	① .156±.016	
(a) AN100-20			5/8	1.750 MIN	3-1/4 MIN		5-3/8	41/64	① .168±.019	

(a) FOR -18 AND -20, THE FINISH REQUIREMENT ONLY, OF THE PROCUREMENT SPECIFICATION SHALL APPLY. THE MATERIAL SHALL BE OF COMMERCIAL WROUGHT STEEL SUITABLE FOR THE PURPOSE.

MATERIAL: SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.010.

② **NOTICE:** **INACTIVE FOR AIRCRAFT DESIGN AFTER 1 MARCH 1986, MAY BE USED FOR GROUND SUPPORT EQUIPMENT.**

APPROVED 12 Nov 42 REVISED ① 20 Mar 51 ② 7 July 86

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN100
① MIL-T-5677	THIMBLE - WIRE CABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.