
AN166701 THRU AN167000

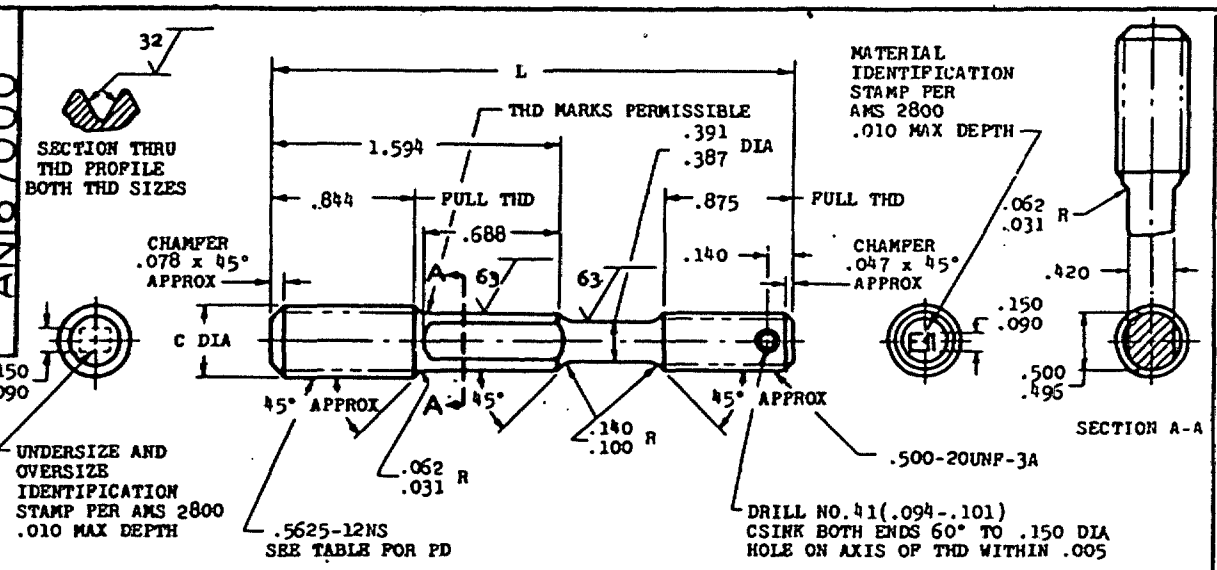

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.557- .562	.557- .562	.557- .562	.557- .562	.565- .571	.566- .571
PD BEFORE PLATING	.5104-.5114	.5134-.5144	.5164-.5174	.5194-.5204	.5224-.5234	.5254-.5264
PD AFTER PLATING	.5109-.5124	.5139-.5154	.5169-.5184	.5199-.5214	.5229-.5244	.5259-.5274
PD LEAD THREAD	.5034-.5054	.5064-.5084	.5094-.5114	.5124-.5144	.5154-.5174	.5184-.5204
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.719	AN166713	AN166714	AN166715	AN166716	AN166717	AN166718
2.844	AN166719	AN166720	AN166721	AN166722	AN166723	AN166724
2.969	AN166725	AN166726	AN166727	AN166728	AN166729	AN166730
3.094	AN166731	AN166732	AN166733	AN166734	AN166735	AN166736
3.219	AN166737	AN166738	AN166739	AN166740	AN166741	AN166742
3.344	AN166743	AN166744	AN166745	AN166746	AN166747	AN166748
3.469	AN166749	AN166750	AN166751	AN166752	AN166753	AN166754
3.594	AN166755	AN166756	AN166757	AN166758	AN166759	AN166760
3.719	AN166761	AN166762	AN166763	AN166764	AN166765	AN166766
3.844	AN166767	AN166768	AN166769	AN166770	AN166771	AN166772
3.969	AN166773	AN166774	AN166775	AN166776	AN166777	AN166778
4.094	AN166779	AN166780	AN166781	AN166782	AN166783	AN166784
4.219	AN166785	AN166786	AN166787	AN166788	AN166789	AN166790
4.344	AN166791	AN166792	AN166793	AN166794	AN166795	AN166796
4.469	AN166797	AN166798	AN166799	AN166800	AN166801	AN166802
4.594	AN166803	AN166804	AN166805	AN166806	AN166807	AN166808
4.719	AN166809	AN166810	AN166811	AN166812	AN166813	AN166814
4.844	AN166815	AN166816	AN166817	AN166818	AN166819	AN166820
4.969	AN166821	AN166822	AN166823	AN166824	AN166825	AN166826
5.094	AN166827	AN166828	AN166829	AN166830	AN166831	AN166832
5.219	AN166833	AN166834	AN166835	AN166836	AN166837	AN166838
5.344	AN166839	AN166840	AN166841	AN166842	AN166843	AN166844
5.469	AN166845	AN166846	AN166847	AN166848	AN166849	AN166850
5.594	AN166851	AN166852	AN166853	AN166854	AN166855	AN166856
5.719	AN166857	AN166858	AN166859	AN166860	AN166861	AN166862
5.844	AN166863	AN166864	AN166865	AN166866	AN166867	AN166868
5.969	AN166869	AN166870	AN166871	AN166872	AN166873	AN166874
6.094	AN166875	AN166876	AN166877	AN166878	AN166879	AN166880
6.219	AN166881	AN166882	AN166883	AN166884	AN166885	AN166886
6.344	AN166887	AN166888	AN166889	AN166890	AN166891	AN166892
6.469	AN166893	AN166894	AN166895	AN166896	AN166897	AN166898
6.594	AN166899	AN166900	AN166901	AN166902	AN166903	AN166904

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 17 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN166701 THRU AN167000
NONE	STUD-STEPPED, DRILLED, NECKED, WRENCH PAD, 1.5 DIA ENGAGEMENT, .5625-12 x .500-20	

E-25-121

Project 5307-0419

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.