A-A-55612
30 JANUARY 1995
SUPERSEDING
MS51848 E
13 DEC 93

COMMERCIAL ITEM DESCRIPTION

WASHER, LOCK-HELICAL SPRING, HI-COLLAR

THE GENERAL SERVICES ADMINISTRATION HAS AUTHORIZED THIS COMMERCIAL ITEM DESCRIPTION FOR ALL FEDERAL AGENCIES

1. SCOPE: THIS COMMERCIAL ITEM DESCRIPTION (CID) DEPICTS THE REQUIREMENTS FOR HI-COLLAR HELICAL SPRING LOCK WASHERS.

2. SALIENT CHARACTERISTICS.

2.1. MATERIAL SHALL BE:


STEEL, CARBON, IN ACCORDANCE WITH ASME B18.21.1.

CORROSION-RESISTANT STEEL (NON-MAGNETIC) WASHERS SHALL BE TYPE 316 (UNS S31600) THRU 1/4 AND TYPE 300 SERIES (UNS S30200 TO UNS S31600) FOR ALL OTHER SIZES.

2.1. FINISHES SHALL BE:

CARBON STEEL WASHERS - MECHANICALLY DEPOSITED ZINC; PHOSPHATE COATING.

CORROSION-RESISTANT STEEL WASHERS - PASSIVATED.

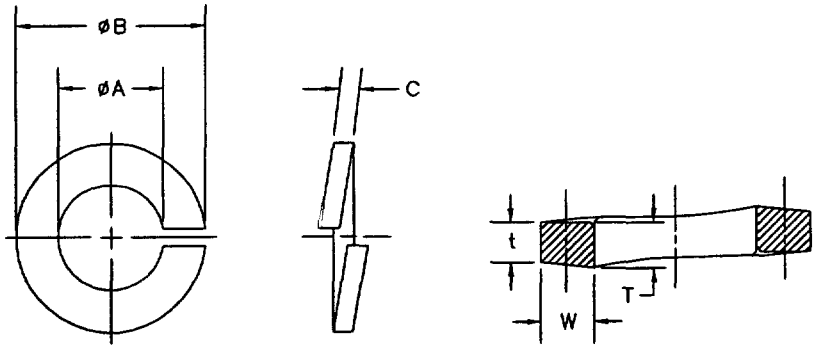

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER. ATTN: DISC-EED, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

NOMINAL SIZE		CARBON STEEL		CRES 300 SERIES	øA (ID)		øB (OD)	WASHER SECTION	
		ZINC	PHOS					W WIDTH	C THICKNESS $\frac{T+t}{2}$
		DASH NUMBERS			MIN	MAX	MAX	MIN	MIN
NO.0	(.060)	1	21	41	.062	.068	.112	.018	.018
NO.2	(.086)	3	23	43	.088	.094	.146	.022	.022
NO.4	(.112)	5	25	45	.114	.120	.173	.022	.022
NO.6	(.138)	7	27	47	.141	.148	.216	.030	.030
NO.8	(.164)	8	28	48	.167	.174	.267	.042	.047
NO.10	(.190)	9	29	49	.193	.200	.294	.042	.047
1/4	(.250)	10	30	50	.252	.260	.363	.047	.078
5/16	(.312)	11	31	51	.314	.322	.457	.062	.093
3/8	(.375)	12	32	52	.377	.385	.550	.076	.125
7/16	(.437)	13	33	53	.440	.450	.644	.090	.140
1/2	(.500)	14	34	54	.502	.512	.733	.103	.172
5/8	(.625)	15	–	55	.628	.641	.917	.125	.203
3/4	(.750)	16	–	–	.753	.766	1.105	.154	.218
7/8	(.875)	17	–	–	.878	.894	1.291	.182	.234
1	(1.000)	18	–	–	1.003	1.024	1.478	.208	.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

3. QUALITY CONFORMANCE PROVISIONS:

3.1. THE SUPPLIERS SHALL BE RESPONSIBLE FOR THOSE IN PROCESS CONTROLS AND INSPECTIONS NECESSARY TO SUPPLY A PRODUCT CONSISTENTLY CONFORMING TO THE REQUIREMENTS OF THIS DOCUMENT.

3.2. UPON REQUEST, THE SUPPLIER WILL CERTIFY WITH DOCUMENTED TEST/INSPECTION EVIDENCE, THAT THE PART SUPPLIED MEET THE REQUIREMENTS OF THIS DOCUMENT.

4. NOTES:

4.1. DIMENSIONS ARE IN INCHES.

4.2. SOME SIZES ON THIS CID ARE NOT COVERED IN ASME B18.21.1.

4.3. THE PART IDENTIFYING NUMBER (PIN) SHALL CONSIST OF THE BASIC CID NUMBER PLUS A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: AA55612 – 10
- 10 — DASH NUMBER
- AA55612 — BASIC CID NUMBER

AA55612–10 INDICATES: WASHER, LOCK–HELICAL SPRING, HIGH COLLAR, 1/4 NOMINAL SIZE, CARBON STEEL, ZINC PLATING

TABLE II. CROSS – REFERENCE TABLE.

CANCELLED MS PIN	REPLACEMENT CID PIN
MS51848 – * 1/	AA55612 – * 1/

1/ * REPRESENTS THE SAME DESIGNATION CODES FOR BOTH MS AND CID PINS.

MILITARY INTERESTS

CUSTODIANS
NAVY – AS
ARMY – AR
AIR FORCE – 99

REVIEWER:
NAVY – MC, OS, SH, YD
ARMY – AT, AV, GL, ME, MI
AIR FORCE – 82
NSA –NS

PREPARING ACTIVITY

DLA–IS

(PROJECT: 5310–1976)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.