A-A-50965A
September 29, 1989
SUPERSEDING
A-A-50965
March 15, 1984

COMMERCIAL ITEM DESCRIPTION

HOLDER, CUT-OFF OR SIDE CUTTING BLADE, LATHE

The General Services Administration has authorized the use of this commercial item description.

Abstract. This description covers cut-off or side cutting blade tool holders that are designed to hold and support cut-off blades that are used on tool room and engine lathes.

Classification. The tool holders shall be of the following styles, classes, and sizes.

Style A - Rigid.
  Class 1 - Straight shank.
  Class 2 - Left-hand off-set shank.
  Class 3 - Right-hand off-set shank.

  Sizes - Sizes shall be selected from table I.

Style B - Spring or gooseneck.
  Class 1 - Straight shank.
  Class 2 - Left-hand off-set shank.
  Class 3 - Right-hand off-set shank.

  Sizes - Sizes shall be selected from table II.

Beneficial comments recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPIC-SSG, 2163 Airways Blvd., Memphis TN 38114-5051.

AMSC N/A
FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

TABLE I. Style A Sizes and dimensions.

Tool holder size			Dimensions of cut-off blade; (inches)	Thickness of shank; (inches)	Height of shank; (inches)	Length of shank; (inches)
Class 1	Class 2	Class 3				
4	5	6	1/16 x 3/8	5/16	1/2	2-1/2
10	20	30	3/32 x 5/8	3/8	7/8	3-1/4
11	21	31	1/8 x 3/4	1/2	1-1/8	3-3/4
12	22	32	1/8 x 7/8	5/8	1-3/8	4
13	23	33	3/16 x 1	3/4	1-5/8	4-1/2
14	24	34	5/16 x 1-1/8	7/8	1-3/4	5-1/2
15	25	35	1/4 x 1-1/4	1	2	6-1/2

TABLE II. Style B Sizes and dimensions.

Tool holder size			Dimensions of cut-off blade; (inches)	Thickness of shank; (inches)	Height of shank; (inches)	Length of shank; (inches)
Class 1	Class 2	Class 3				
7	8	9	1/16 x 3/8	5/16	1/2	2-1/2
40	50	60	1/32 x 5/8	3/8	7/8	3-1/4
41	51	61	1/8 x 3/4	1/2	1-1/8	3-3/4
42	52	62	1/8 x 7/8	5/8	1-3/8	4
43	53	63	3/16 x 1	3/4	1-5/8	4-1/2

Salient characteristics. The tool holder shall meet the followin minimum requirements.

1. Materials. The tool holder shall be manufactured from either drop-forged alloy steel, heat-treated to Rockwell "C" 40 to 48 hardness, or alloy steel surface hardened to Rockwell "C" 50 to 55 hardness when tested in accordance with ASTM E18.

2. Clamping device. The tool holder shall be provided with a clamping device that is hardened and finished, to restrict all movement of the blade during the cutting action.

3. Wrench. A wrench to fit the clamping device shall be furnished with each tool holder.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Fed-STD-376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Environmental protection. During the manufacture of the tool holders, materials hazardous to the ecological system as prohibited by Federal, state, or local statues in affect on the date of the contract shall not be used.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Responsibility for compliance. All items shall meet all requirements of the salient characteristics paragraphs. The inspection set forth in this description shall become a part of the contractors overall inspection system or quality program. The absence of any inspection requirements in the description shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Sampling inspection. As a minimum sampling inspection, the supplier shall randomly select the number of samples in table I that is applicable to the quantity of items being purchased. Each sample item shall be inspected to determine conformance with the examination, the test, and the inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

Should any of the sample items fail to meet either the examination, test, or inspection, the entire lot shall be considered defective and unsuitable for acceptance. A lot is defined as all items of the same type, and size presented at one time for acceptance.

TABLE I. Sampling plan.

Quantity of items being purchased	Sample size	Quantity of items being purchased	Sample size
2 to 8	2	151 to 280	32
9 to 15	3	281 to 500	50
16 to 25	5	501 to 1,200	80
26 to 50	8	1201 to 3,200	125
51 to 90	13	3201 to 10,000	200
91 to 150	20		


Examination. Each holder submitted for sample inspection shall be visually examined to determine conformance with all requirements of this description except for the hardness tests.

Dimensional inspection. Each holder submitted for sample inspection shall be inspected to assure conformance with all dimensional and tolerance requirements specified.

Hardness tests. After the sample inspection has been completed, a hardness test shall be performed on 10 percent of the sample holders. If any of the tests samples fail to meet the applicable hardness specified herein, the total lot from which the samples were selected shall be rejected.

Preservation, packaging, packing, and marking. Unless otherwise specified in the contract or purchase order preservation, packing, and marking shall be in accordance with ASTM D 3951. When specified, preservation, packing, and marking shall be in accordance with PPP-P-40 level as specified in the contract.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. Where applicable Arabic numbers shall be substituted for Roman numerals.

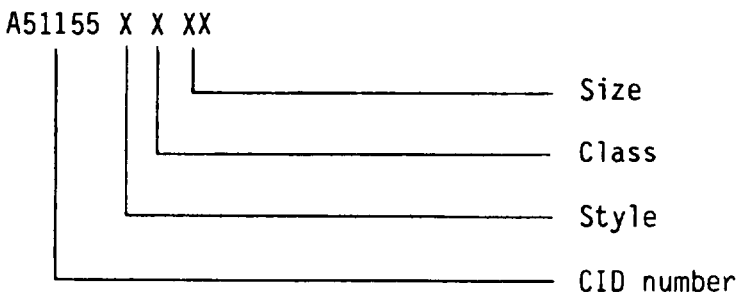

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

NOTES.

Ordering data. Purchasers should select the preferred options permitted herein, and include the following information.

a. Title, number, and date of this commercial item description.

b. Style, class, size, and quanity required.

Federal Specification PPP-P-40 is available from the Naval Publications and Form center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

Federal Standard FED-STD-376 is available from the Naval Publications and Form center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

ASTM D 3951 is available from American Society for Testing and Materials, 1916 Race street, Philadelphia, PA 19103-1187.

Cross reference data. Classification changes from the previous issue of this description are as follows.

TABLE I. Style A

A-A-50965 Tool Holder Number			A-A-50965A Tool Holder Size		
C-S- 4	C-L- 5	C-R- 6	4	5	6
C-S-10	C-L-20	C-R-30	10	20	30
C-S-11	C-L-21	C-R-31	11	21	31
C-S-12	C-L-22	C-R-32	12	22	32
C-S-13	C-L-23	C-R-33	13	23	33
C-S-14	C-L-24	C-R-34	14	24	34
C-S-15	C-L-25	C-R-35	15	25	35

TABLE II. Style B

A-A-50965 Tool Holder Number			A-A-50965A Tool Holder Size		
C-S- 7	C-L- 8	C-R- 9	7	8	9
C-S-40	C-L-50	C-R-60	40	50	60
C-S-41	C-L-51	C-R-61	41	51	61
C-S-42	C-L-52	C-R-62	42	52	62
C-S-43	C-L-53	C-R-63	43	53	63

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodians

Army - AL
Air Force - 99

Review Activities

Air Force - 84
DLA - GS

User Activity

Navy - MC

CIVIL AGENCY COORDINATION ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:
DLA - IP

Project 3460-0142

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.