INCH-POUND
A-A-50967B
30 May 2000
SUPERSEDING
A-A-50967A
28 February 1990

COMMERCIAL ITEM DESCRIPTION

GRINDING MACHINE, BENCH, HAND POWERED

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for hand-powered, bench-mounted, grinding machines with a six-inch diameter grinding wheel used for tool sharpening in situations where power-driven machines are impractical.

2. CLASSIFICATION. The machine shall be classified and identified by types in accordance with the defining duty ratings and gear ratios specified. The selected types of machines to be supplied shall be specified in the acquisition order (see 7.5(b)).

Type I - Heavy duty - Rotation of the grinding wheel is accomplished through the use of a gear mechanism with a ratio of 13 to 1 or more.

Type II - Light duty - Rotation of the grinding wheel is accomplished through the use of a gear mechanism with a ratio of 9 to 1 or more.

3. SALIENT CHARACTERISTICS. The machine shall meet the requirements specified in this document and shall conform to current industrial standards. Machine operation shall be smooth with minimal noise and the grinding wheel shall not slip during operation.

3.1 Components. The machine shall consist of bushings, a gear case, gears, a handcrank, a tool rest, a mounting flange, a screw clamp, an oil cap, paint, and a grinding wheel.

3.2 Bushings. Each machine shall have at least four bushing supports. Two of the bushings shall support the grinding wheel shaft and two shall support the hand crank shaft.

3.3 Gear case. The gear case shall have sufficient size and strength to support the machine components. All encased gears shall operate smoothly and without excessive noise.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

3.4 Gears. All gears shall be constructed from a material suitable for the intended purpose. All drive gears shall have sufficient hardness, surface finish, and toughness to transmit the full-rated torque of the drive without gear damage, failure, or premature deterioration and wear.

3.5 Hand crank. A hand crank and handle shall rotate the grinding wheel.

3.6 Tool rest. The tool rest height and position shall be adjustable as needed to accommodate edged hand tools.

3.7 Mounting flange. The mounting flange shall prevent the grinding wheel from slipping during operation.

3.8 Screw clamp. For type I machines, a screw clamp shall be furnished to mount the machine on a bench-top one to three inches thick. For type II machines, a screw clamp shall be furnished to mount the machine on a bench top 3/4 to 1-1/2 inches thick.

3.9 Lubrication. The machine shall provide a suitable means of lubrication for all bushings and gears. Hinged-lid oil caps shall be provided on all external oil holes to block out grit and dust.

3.10 Paint. The machine exterior surfaces shall be painted in accordance with the manufacturer's standard methods, materials, and colors.

3.11 Grinding wheel. The grinding wheel dimensions shall be six inches in diameter, one inch wide and be provided with a 3/8 inch diameter hole. The grinding wheel dimensions are applicable to both type I and type II machines. The wheel shall have aluminum oxide abrasives, vitrified bond, medium grain, medium grade of hardness, square faced and straight sides, and shall meet the requirements of American National Standard Institute (ANSI) B74.13, "Markings for Identifying Grinding Wheels and Other Bonded Abrasives" (DoD adopted).

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the machines supplied shall be preserved, packed, and marked as specified in the acquisition order (see 7.5(c)).

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

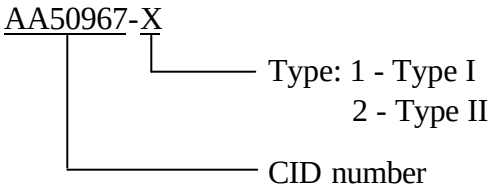

7.2 Sources of documents.

7.2 1 ANSI standards. Copies of ANSI standards may be obtained from the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

7.2.2 FAR. Copies of the FAR documents may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

7.3 National stock numbers (NSNs). The NSNs listed below are assigned for the listed machine types (see table I).

Type	Assigned NSN
I	3415-00-241-3116
II	3415-00-294-5026

7.4 Sources of supply. The manufacturers and/or suppliers listed below are known to supply products which meet the salient characteristics requirements of this document. Competition is not limited to the listed firms.

Prairie Tool Company
110 Prairie Tool Drive
Prairie Du Chein, WI 53821
(608) 326-6111

Black and Company
5351 Minnesota Street
Indianapolis, IN 46628
(317) 243-8676

Kampi Components Co., Inc.
210 US Highway 13
Bristol, PA 19007
(215) 788-2055

Industrial Supply Corporation
1905 Westwood Avenue
Richmond, VA 23230
(804) 355-8041

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

7.5 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision and CID PIN
b. Product classification type (see 2)
c. Packaging requirements (see 6.1)

MILITARY INTERESTS:

Custodian:
Air Force - 99

Reviewer:
Air Force - 84

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 6FET

Prepairing activity:
DLA - GS

(Project 3415-0252)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.