
INCH - POUND

MS51608A(AR)
15 OCTOBER 1992
SUPERSEDING
MS51608(MU)
15 MAY 1968

MILITARY SPECIFICATION SHEET

LAMP, INCANDESCENT, T-1¼SPECIAL SCREW BASE(956)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

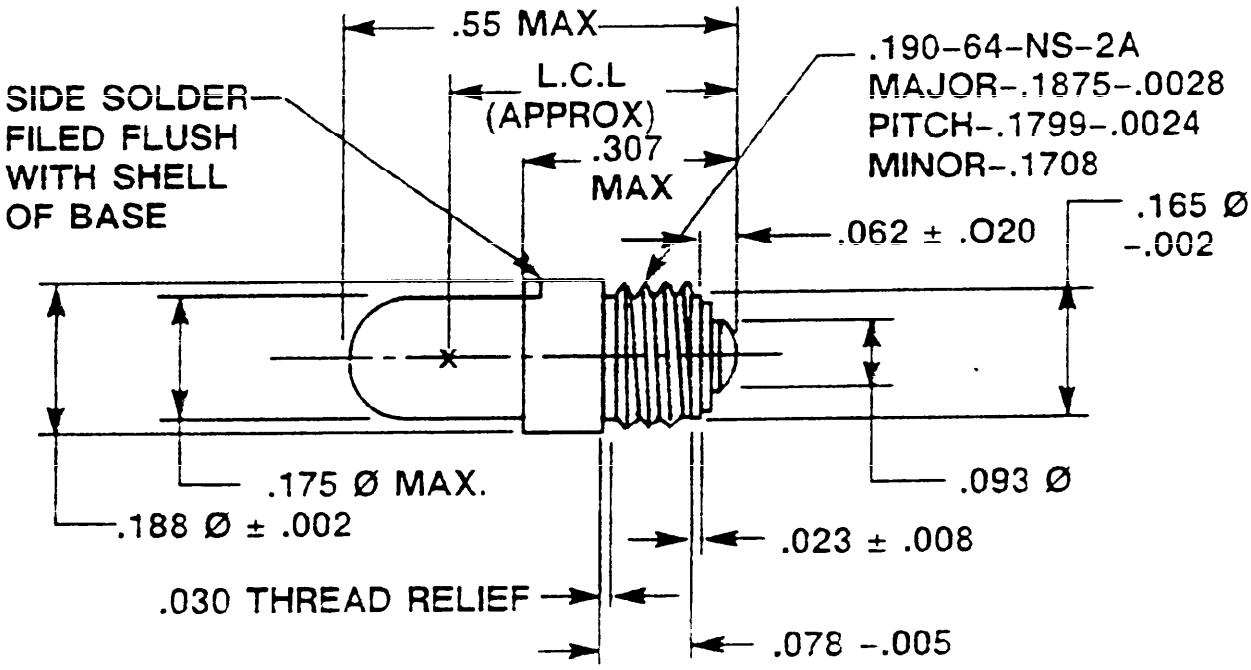

AMSC/NA

FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

MS PART NUMBER	TRADE NO.	DESIGN		FIL CONST	LCL	AVG LIFE (HOURS)	SPHER CP (APPROX)
		VOLTS	AMPS				
MS51608-1	8-641	1.35	.06	C-2R	.44	500	.006
MS51608-2	329	2.5	.40	C-2R	.44	30	0.55
MS51608-3	325	3.0	.19	C-2R	.43	350	0.25
MS51608-4	673	4.5	.29	C-2R	.43	100	1.05
MS51608-5	8-662	6.0	.04	C-2V	.43	1000	.03
MS51608-6	8-644	14.0	.08	C-2F	.44	750	.50
MS51608-7	8635	28.0	.04	C-2F	.44	1000	.32

NOTES:

1. Shape of bulb is designated by a letter. Size is expressed by a number denoting the approximate diameter in eighths of an inch.

2. Voltage, candle power and ampere ratings are in accordance with manufacturer's information and are not covered by specification.

3. No portion of bulb shall be more than .095 from the axis of the lamp.

4. DIMENSIONS AND TOLERANCE: Dimensions are in inches. Unless otherwise specified, tolerance is ± .010.

5. The MS part number shall consist of the MS number plus the dash number.

6. In the event of a conflict between the text of this Military Specification Sheet and the references cited herein, the text of this Military Specification Sheet shall take precedence.

7. Referenced Government and (non-government) documents of the issue listed in the Deparatment of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this Military Specification Sheet to the extent specified herein.

Custodian:
Army - AR

Preparing Activity:
Army - AR
Project Number 6240-A384

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.