USER SYMBOLS:
NAVY - MC

REVIEWER SYMBOLS:
NAVY - SH, EC
USAF - 11, 99
ARMY - AV

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5940

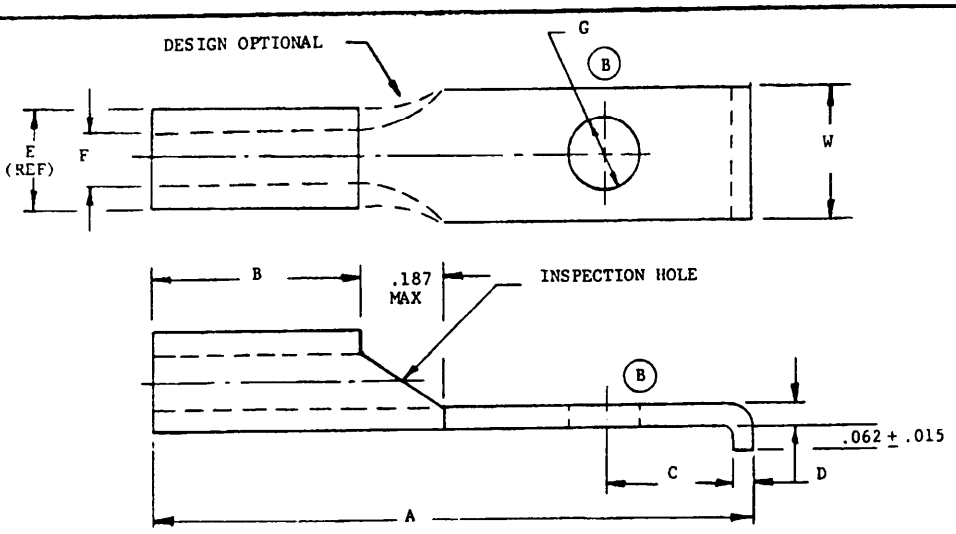


TABLE I

DASH NO.	WIRE SIZE	STUD SIZE	A MAX	B MIN	C ±.010	D MAX	D MIN	E	F	G MAX	G MIN	W MAX	W MIN	MIL-T-16366 (SHIPS) REFERENCE	
1	22-18	8	1.248	.250	.343	.037	.023	.165 / .110	.070 / .052	.178	.168	.322	.302	L60	1-2
2	16-14		1.311			.037	.023	.192 / .139	.090 / .081						2-1/2-4
3	12-10		1.436	.250		.046	.032	.255 / .199	.135 / .128						6-9

TABLE II (REF)

WIRE SIZE	NAVY CABLE SIZE	WIRE SIZE	NAVY CABLE SIZE	WIRE SIZE	NAVY CABLE SIZE
22-18	1 (1)	16-14	2-1/2 (1)	12-10	6 (7)
	1 (7)		2-1/2 (19)		6 (19)
	1 (10)		2-1/2 (26)		9 (7)
	1-1/2 (1)		3 (7)		9 (37)
	1-1/2 (7)		4 (1)		
	1-1/2 (16)		4 (19)		
	1-1/2 (41)		4 (7)		
	2 (7)		4 (41)		

ADDITIONAL REQUIREMENTS:
1. MATERIAL: SEE ACQUISITION SPECIFICATION.
2. FINISH: TIN PLATED. SEE ACQUISITION SPECIFICATION.
3. DIMENSIONS IN INCHES.
4. TENSILE STRENGTH: THE TENSILE STRENGTH SHALL BE THAT SPECIFIED IN ACQUISITION SPECIFICATION.
(B) 5. DESIGN AND CONSTRUCTION: LUG TERMINALS SHALL BE OF THE DESIGN, CONSTRUCTION, AND PHYSICAL DIMENSIONS SPECIFIED IN THE FIGURE AND TABLE I AND SHALL MEET THE PERFORMANCE REQUIREMENTS OF MIL-T-7928 WHEN CRIMPED ON MIL-C-915 AND MIL-C-2194 CABLE WITH A 9000-S6202-73809 CRIMPING TOOL AND MIL-C-22520/24 CRIMPING TOOL. THIS STANDARD DEPICTS ONLY GENERAL DESIGN CHARACTERISTICS AND IS NOT INTENDED TO LIMIT SPECIFIC MANUFACTURING PROCESSES. WIRE INSULATION SUPPORT NOT REQUIRED.
(B) 6. METRIC EQUIVALENTS (TO THE NEAREST 0.01mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4mm.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 26 Sept 67 REVISED (A) 12 March 1973 (B) 30 Oct 1981

(B) REVISED

P.A. NAVY - AS Other Cust Army - ER USAF - 85	TITLE TERMINAL, LUG, UNINSULATED, RECTANGULAR TONGUE LIPPED END, CRIMP STYLE, TYPE I, CLASS 1, FOR 175°C TOTAL CONDUCTOR TEMPERATURE (B)	MILITARY STANDARD MS21010
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
NAVY - SH, EC
USAF - 11gg
ARMY - AV

USER SYMBOLS:
NAVY - MC

FED. SUP CLASS
5940

(B)

INCHES	mm	INCHES	mm
.010	0.25	.187	4.75
.015	0.38	.190	4.83
.023	0.58	.192	4.88
.032	0.81	.250	6.35
.037	0.94	.302	7.67
.046	1.17	.322	8.18
.052	1.32	.343	8.71
.062	1.58	1.000	25.40
.070	1.78	1.248	31.70
.081	2.06	1.311	33.30
.090	2.29	1.436	36.47
.110	2.54	1.500	38.10
.128	3.25	2.000	50.80
.135	3.43	2.500	63.50
.139	3.53	3.000	76.20
.165	4.19	4.000	101.60
.168	4.26	6.000	152.40
.178	4.52	9.000	228.60

APPROVED 26 SEPT 67 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P.A.
NAVY - AS
Other Cust
Army - ER
USAF - 85

TITLE
TERMINAL, LUG, UNINSULATED, RECTANGULAR TONGUE LIPPED END, CRIMP STYLE, TYPE I, CLASS 1, FOR 175°C TOTAL CONDUCTOR TEMPERATURE

MILITARY STANDARD
MS 21010

ACQUISITION SPECIFICATION
MIL-T-7928

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 71 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—505-022/8583

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.