User Activities

Review Activities
DLA - IS

This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable

FED SUP CLASS
5355

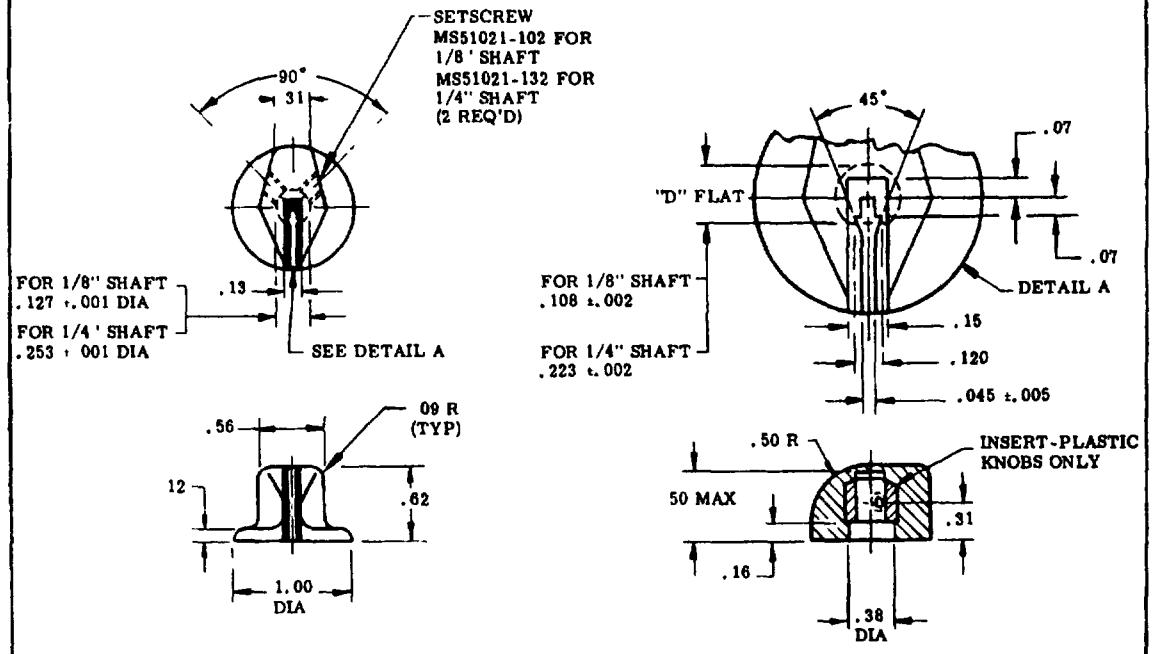


FIGURE 1

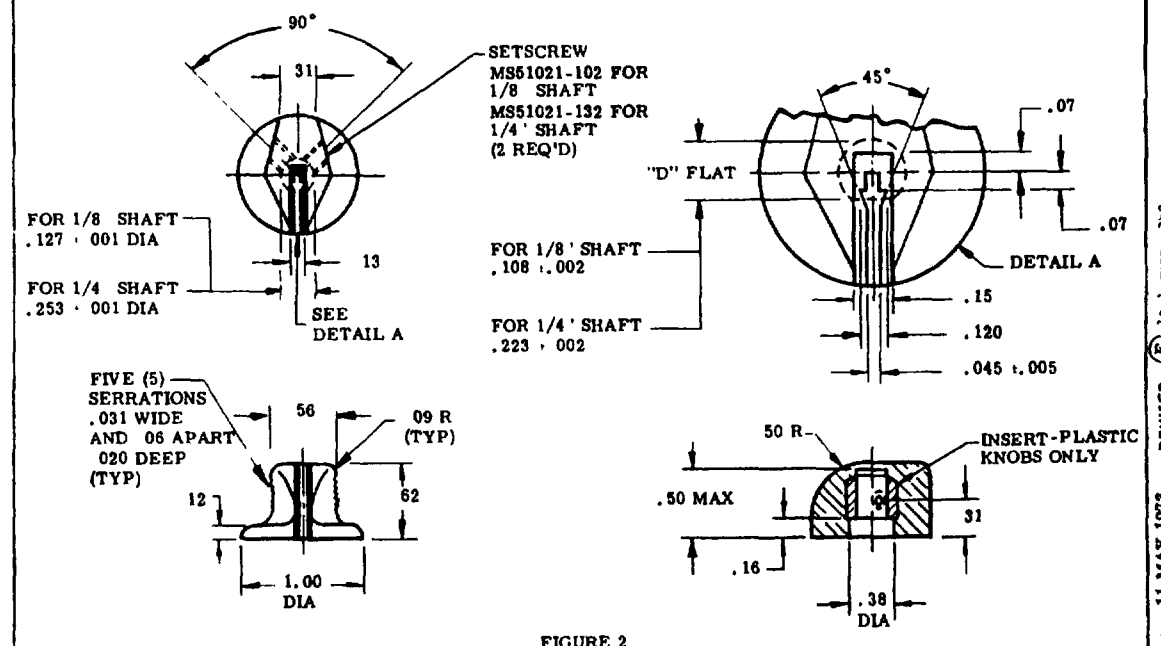


FIGURE 2

Ⓔ Entire standard revised

APPROVED 11 MAY 1973 REVISED Ⓔ

P A 11 Other Cust	TITLE KNOBS - POINTER ILLUMINATED AND NON-ILLUMINATED	MILITARY STANDARD MS21384(USAF)	
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 1 OF 4	

DD FORM 672-1 (Limited Coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5355-F042

PLATE NO 21065

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:38Z
Check the source to verify that this is the current version before use.

User Activities.
Review Activities.
DLA - ES

FED SUP CLASS
5355

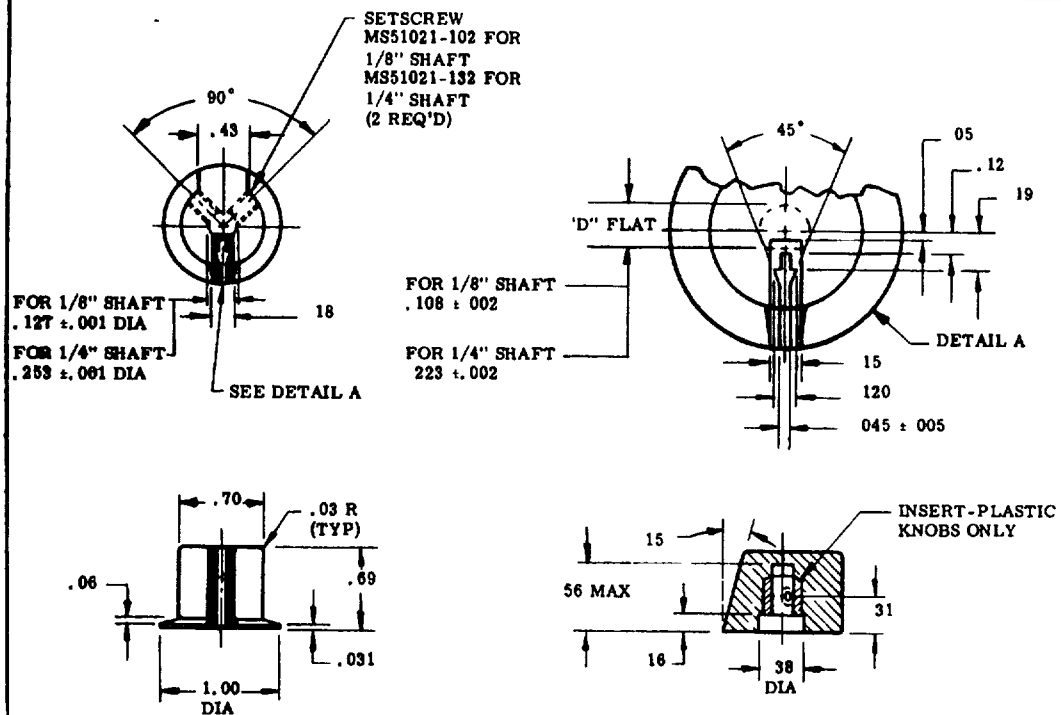


FIGURE 3

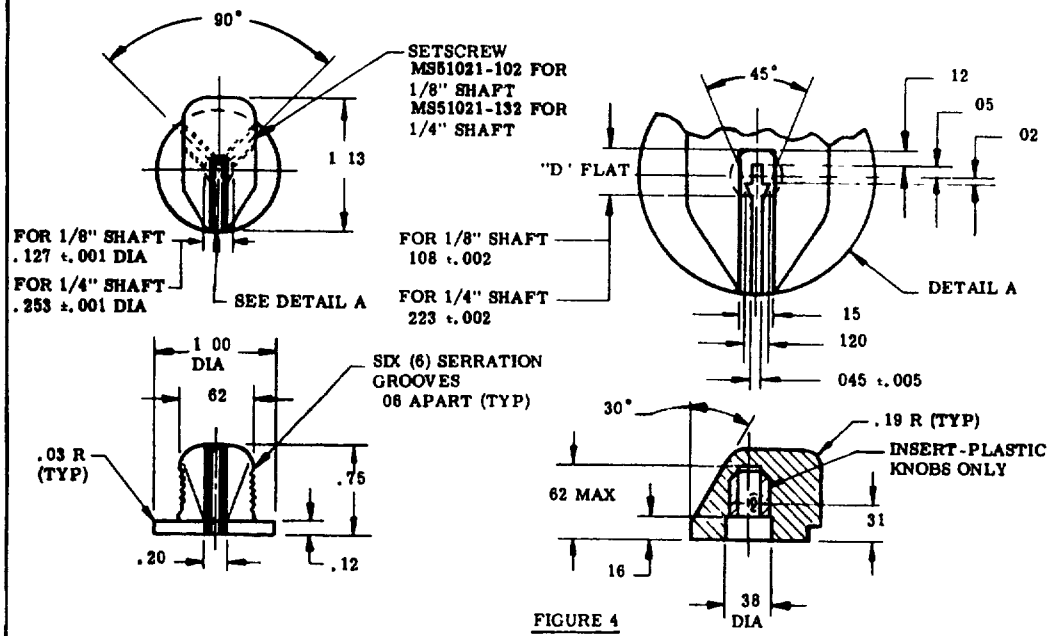


FIGURE 4

APPROVED 11 MAY 1973 REVISED (E) FOR CHANGES SEE SHEET 1

P A 11 Other Cust	TITLE KNOBS - POINTER ILLUMINATED AND NON-ILLUMINATED	MILITARY STANDARD MS21384(USAF)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 2 OF 4

This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:38Z
Check the source to verify that this is the current version before use.

User Activities
Review Activities
DLA - IS

TABLE I Interchangeability

MS21384 dash numbers	
Cancelled 1/	Superseding
-02	-02ANN
-04	-04ANN
-08	-04BNN
-13	-01DNN
-16	-04DNN
-20	-14ENN
-24	-14FNN
-30	-12HNN

1/ Knobs covered by cancelled dash numbers shall be used until existing stock is depleted For new procurement specify superseding dash numbers as shown in table III

TABLE II Knob styles

Illuminated			Non-illuminated	
Style	Figure Number	Illumination Ratio ±15%	Style	Figure Number
A	1	0 08	E	1
B	2	0 07	F	2
C	3	0 06	G	3
D	4	0 07	H	4

TABLE III MS dash numbers

MS21384 - 1 4 A N B

SERIES	SHAFT DIA	STYLE	COLOR-KNOB	INDICIA
0 - Plastic, illuminated	1 - 125 Round	See table II	N-Gray with black indicia border	N-White Round or "D" Flat as shown
1 - Plastic, non-illuminated	2 - 125 'D' Flat		B-Black	B-Black Round or "D" Flat as shown
2 - Aluminum	3 - 250 Round		G-Gray	C-White "D" Flat opposite to that shown
	4 - 250 'D' Flat		M-Metal, natural	

METRIC EQUIVALENTS

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
001	03	07	1 78	16	4 06	43	10 92
002	05	09	2 29	18	4 57	50	12 70
005	13	108	2 74	19	4 83	.56	14 22
02	.51	12	3 05	20	5.08	62	15 75
03	76	125	3 18	223	5 66	69	17 53
031	79	127	3.22	25	6 35	70	17 78
045	1 14	.13	3.30	253	6 43	75	19 05
05	1.27	15	3 81	31	7 87	1 00	25 40
06	1 52			38	9.65	1.13	28.70

APPROVED 11 MAY 1973 REVISED (E) FOR CHANGES SEE SHEET 1

This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity All other military activities are required to employ this standard when e suitable

P A 11	TITLE	MILITARY STANDARD
Other Cust	KNOBS - POINTER ILLUMINATED AND NON-ILLUMINATED	MS21384(USAF)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 3 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:38Z
Check the source to verify that this is the current version before use.

NOTES

1. Dimensions. In inches.

2. Tolerances. Unless otherwise specified, tolerances are .010 (.25 mm) for three place decimals, .02 (.51 mm) for two place decimals, and ±0° 30' on angles.

3. Weight. .33 ounces maximum.

4. Material. Insert: Brass in accordance with QQ-B-626
   Knob: Thermoplastic or Aluminum alloy.

5. Finish. Insert: Nickel plate in accordance with QQ-N-290, grade G, class 2.
   Knob: Bottom surface of illuminated knobs shall have no coating and shall be polished.

6. Color. Unless otherwise specified, colors shall be in accordance with FED-STD-595.

   Knob: Gray lusterless, color number 36231
   Black lusterless, color number 37038.
   Metal, natural-anodize in accordance with MIL-A-8625

   Indicia: White lusterless, color number 37875.
   Reflection may be reduced to 50% minimum
   Markings shall meet a daylight contrast of 9 minimum
   Black lusterless, color number 37038 for anodized knobs

   Indicia border: Black lusterless, color number 37038

7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

8. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

9. Metric equivalents (to the nearest .01 mm) are given for information only and are based on 1 inch = 25.4 mm.

APPROVED 11 MAY 1973 REVISED (E) FOR CHANGES SEE SHEET 1

User Activities:

Review Activities:
DLA - IS

This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P A 11 Other Cust	TITLE: KNOBS - POINTER ILLUMINATED AND NON-ILLUMINATED	MILITARY STANDARD MS21384(USAF)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:38Z
Check the source to verify that this is the current version before use.