(Project No. 6240-0228)

FED. SUP CLASS 6240

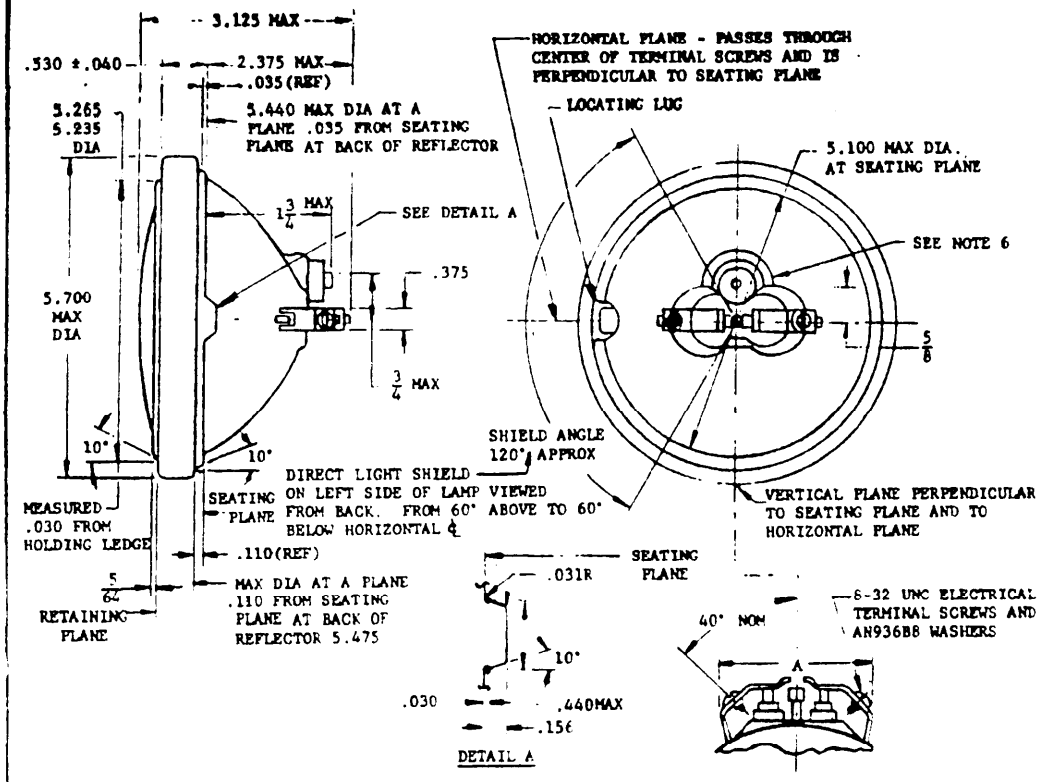


TABLE I

LAMP DESCRIPTION AND PERFORMANCE DATA

DASH NO.	TRADE NO.	MAX WGT LB	RATED VOLTS	INITIAL WATTS	FILAMENT TYPE	FILAMENT WITH OR WITHOUT SHIELD	MINIMUM BEAM CHARACTERISTICS THROUGH OPTICAL AXIS (NOTE 3) INTENSITY (CANDELAS) INITIAL	INTENSITY (CANDELAS) AT 70% LIFE	HORIZ SPREAD	VERT SPREAD	RATED LIFE HOURS (NOTE 2)	COVER GLASS TYPE	COVER GLASS NOM RAD
-4553	4553	1	28	250 ±12.5	CC-8	WITH SHIELD	225,000	157,000	2°	2°	25	CLEAR	34.0 APPROX
							65,000	45,000	7°	8°			
-4581	4581	1		450 ±22.5		WITHOUT SHIELD	350,000	210,000	1°	1°	10		
							35,000	21,000	12°	12°			
(NOTE 4) -4522	4522	1	13	250 ±12.5	C-2	WITH SHIELD	220,000	155,000	1°	1°	25		
							50,000	35,000	6°	6°			
(NOTE 6) -Q4681	Q4681	1	28	450 ±22.5	CC-6	WITHOUT SHIELD	270,000	240,000	1°	1°	50		
							27,000	24,000	14°	8°			

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓔ REVISED AND REDRAWN.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY - AS (Other Coast) USAF - 82 ARMY - AV	*	LAMP, INCANDESCENT, PAR-46 BULB, SCREW TERMINAL BASE, LANDING	MS25241
PROCUREMENT SPECIFICATION MIL-L-6363		SUPERSEDES: AN3129	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 15420

APPROVED 12 AUG 57 REVISED Ⓔ 21 MAR 1972

USER SYMBOLS:

REVIEWER SYMBOLS: USAF - 11, 82 NAVY - AS ARMY - AV

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft specification should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Suggestions for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6240

TABLE II

DASH NO.	A MAX.
-4553	2.25
-4581	2.25
-4522	2.25
-Q4681	2.50

NOTES:

1. EACH LAMP SHALL BE PERMANENTLY AND LEGIBLY MARKED WITH THE IDENTIFICATION NUMBER, MANUFACTURER'S TRADEMARK OR ABBREVIATION OF MANUFACTURER'S NAME, RATED VOLTS, AND WATTS.
2. LIFE TEST CYCLE: 5 MINUTES ON, 5 MINUTES OFF
3. MAXIMUM ALLOWABLE DEVIATION OF BEAM AXIS FROM MECHANICAL AXIS: 1.5°.
4. -4522 IS NOT FOR AIR FORCE USE.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .016 ANGLES ± 1°.
6. "Q" DESIGNATES A QUARTZ - HALOGEN LAMP ENCLOSED IN A PAR ENVELOPE. THE THIRD FILAMENT SUPPORT APPEARS ON THE Q4681 LAMP ONLY.
7. MS25241-4553 REPLACES AN3129-4523. AN3129-4523 CANNOT ALWAYS REPLACE MS25241-4553 AND SHOULD BE USED ONLY UNTIL EXISTING STOCK IS DEPLETED.

* CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (ASCC 12/2 STANAG 3544). WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILLIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES. IF REQUIRED

REVIEWER SYMBOLS:
USAF - 11, 82
NAVY - AS
ARMY - AV

USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 12 AUG 57 REVISED (E) FOR CHANGES SEE SHEETS 1 AND 2

P.A.	INTERNATIONAL INTEREST *	TITLE	MILITARY STANDARD
NAVY-AS Other Cust USAF-82 ARMY-AV		LAMP, INCANDESCENT, PAR-46 BULB, SCREW TERMINAL BASE, LANDING	MS25241
PROCUREMENT SPECIFICATION MIL-L-6363		SUPERSEDES AN3129	SHEET 2

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 19320

U. S. GOVERNMENT PRINTING OFFICE: 1972-716-163 6063

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.