




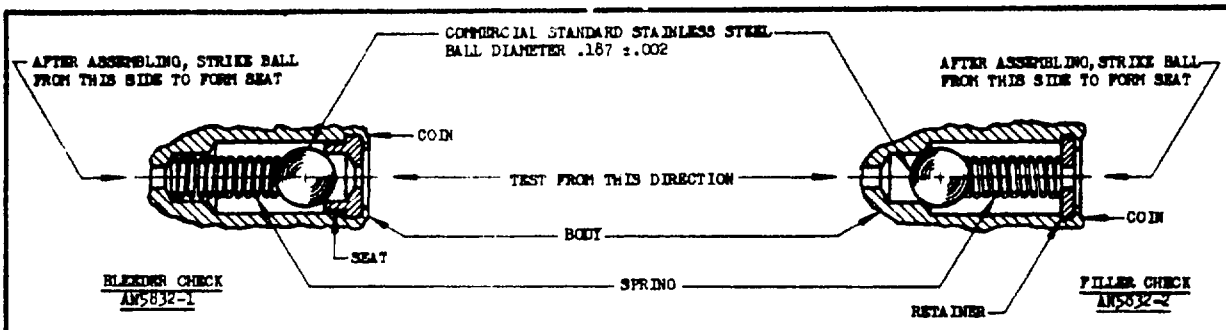

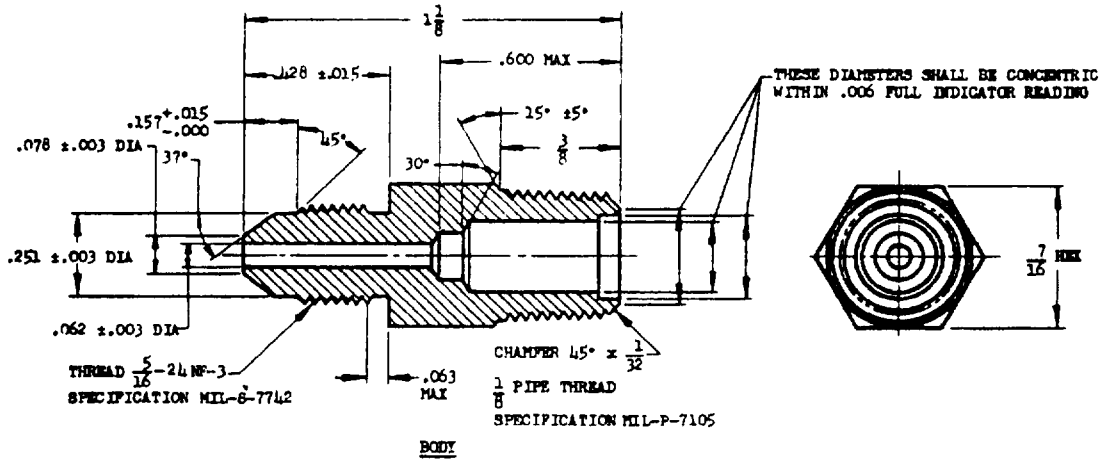

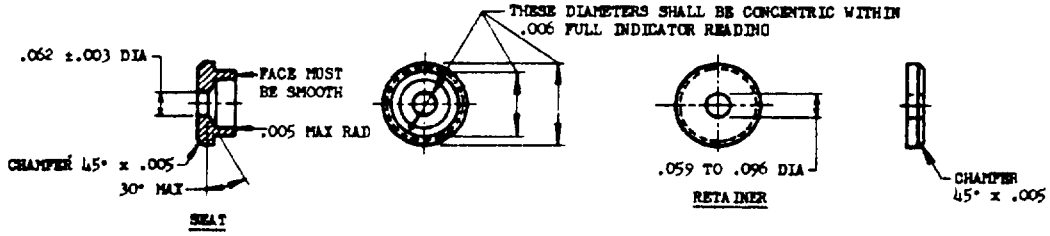

(5) FUNCTIONALLY BUT NOT PHYSICALLY INTERCHANGEABLE WITH SUPERSEDING STANDARD.

AN PART NO.	ITEM
AN5832-1	BLEEDER CHECK VALVE
AN5832-2	FILLER CHECK VALVE

(5) INACTIVE FOR DESIGN AFTER 21 SEPT. 1955. USE MS28052.

INTERNAL DESIGNS OTHER THAN THE ABOVE SHALL BE ACCEPTABLE, PROVIDED EXTERNAL DIMENSIONS AND PERFORMANCE REQUIREMENTS ARE MET.

MATERIAL: SPRING, PHOSPHOR BRONZE, SPECIFICATION QQ-W-401.
ALL OTHER PARTS, BRASS, SPECIFICATION QQ-B-611, COMPOSITION B HALF HARD.

VALVE TO HOLD, WITH SLIGHT LEAKAGE, TO 2 PSI, BREAK OPEN BETWEEN 2 AND 5 PSI. MAXIMUM LEAKAGE UNDER 2 PSI TO BE 50 CC OF AIR PER MINUTE.

STAMP LETTER B ON AN5832-1 AND LETTER F ON AN5832-2 ON 3 ALTERNATE HEX FLATS AND FILL WITH BLACK AND WHITE ENAMEL, RESPECTIVELY, SPECIFICATION MIL-E-7729. STAMP AN PART NO. ON FLATS OF HEX. ALL MARKINGS TO BE NOT LESS THAN 1/16 HIGH x 1/64 LINE WIDTH x 1/64 DEEP.

FINISH: AN5832-1, ALUMINUM OR BRASS; AN5832-2, ANY BLACK OXIDIZING FINISH.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, FRACTIONS ±1/64, ANGLES ±1/2°.

(5) FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE AMA BULLETIN NO. 267.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN5832
NONE	VALVES — PRESSURE GAGE LINES BLEEDER AND FILLER CHECK	

SUPERSEDES USAF DRAWINGS 43A14985, 43A14986, 43A14988, 43A14989, 43A21611, 43A21612, AND 43A21613.

APPROVED 17 Aug 43 REVISED (1) 2 Sep 43 (2) 7 Aug 44 (3) 2 Sep 49 (4) 29 May 51 (5) 21 Sep 55

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all authorized standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:21Z
Check the source to verify that this is the current version before use.