INCH-POUND

A-A-55508
April 22, 1994

COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER, BLOCK, 30 AMPERES, 250 V AC, 1 TO 12 POLES

The General Services Administration has authorized the use of this commercial item description (CID).

Abstract. This CID covers the general requirements for fuseholder blocks which accommodate 10.3 millimeters (mm) x 38.1 mm (.406 inch x 1.5 inches) cartridge fuses. Fuseholders covered by this CID are intended for commercial/industrial applications.

Part or Identifying Number (PIN). The PIN for the CID shall be as shown in the following example:

A-A-55508 - 001

A-A-55508: CID number

001: Dash number (see table I)

Salient characteristics

Ampere rating. The ampere rating shall be 30 amperes maximum.

Voltage rating. The voltage rating shall be 250 V ac maximum

Interrupting rating. This fuseholder shall have an interrupting rating of 10,000 amperes minimum.

Fuse clip material. Fuse clips shall be silver plated beryllium copper.

Terminals. The terminals shall be 8-32 THD screw type.

Fuseholder base. The fuseholder base shall be black phenolic laminate with a UL 94HB flammability rating as a minimum.

Design and construction Fuseholders supplied to this CID shall be as specified herein (see figure 1).

Marking. Fuseholders supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Fuse accommodation This fuseholder accepts fuses with dimensions of 10.3 mm x 38.1 mm (.406 inch x 1.5 inches).


Regulatory requirements. This section is not applicable to this CID.

AMSC N/A

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

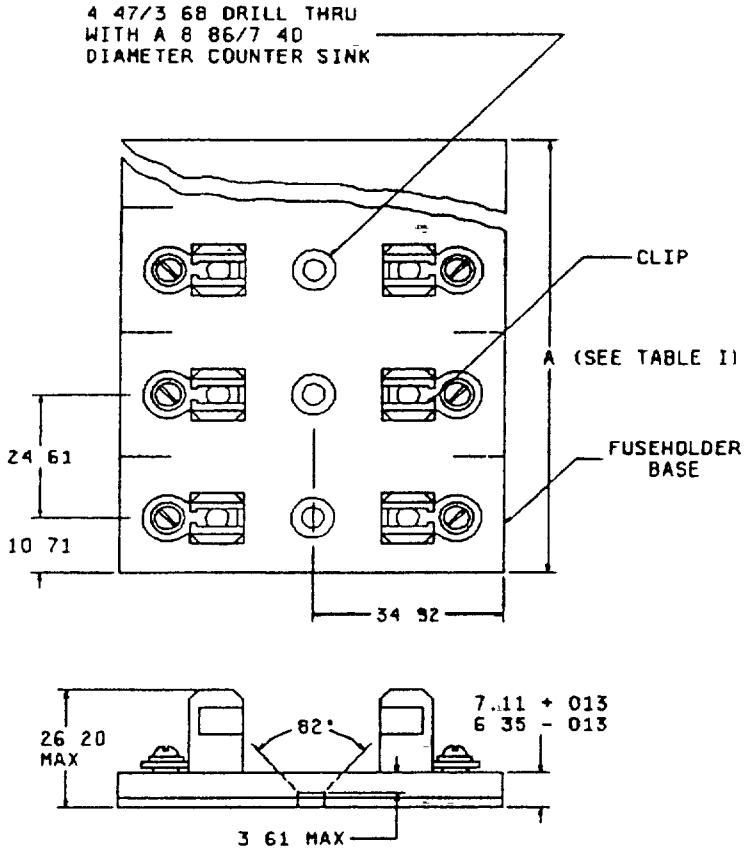

mm	Inches	mm	Inches
0.013	.0005	7.40	.291
3.61	.142	8.86	.349
3.68	.145	10.71	.422
4.47	.176	24.61	.969
6.35	.250	26.20	1.031
7 11	.280	34.92	1.375

NOTES
1. Dimensions are in millimeters.
2. Tolerance is ±0.5 mm (.20 inch), unless otherwise specified.
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence

Figure 1. Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

A-A-55508-	Number of poles	Dimension A
001	1	21.33 (.84)
002	2	45.97 (1.81)
003	3	70.61 (2.78)
004	4	95.25 (3.75)
005	5	119.88 (4.72)
006	6	144.52 (5.69)
007	7	169 16 (6.66)
008	8	193.80 (7.63)
009	9	218.18 (8.59)
010	10	242.82 (9.56)
011	11	267.46 (10.53)
012	12	292.10 (11.5)

Quality assurance provisions.

Responsibility for inspection. The contractor is responsible for the performance of all inspection, examination, and test requirements specified in the contract or purchase order. The contractor may use his own or any other facilities suitable for inspection requirements specified in the contract or purchase order, unless otherwise disapproved by the acquiring activity. The acquiring activity reserves the right to perform any of the inspections set forth in the contract or purchase order where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample. The acquiring activity reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance. A certificate of compliance shall accompany all fuseholders supplied to this CID

Packaging.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or purchase order.

Notes. This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

Referenced document. The following document, of the issue in effect on date of invitation for bids for request for proposal, form a part of this CID to the extent specified herein.

Other Publication

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 94 - Safety Tests for Flammability of Plastic Materials for Parts in Devices in Appliances, Standard For.

(Applications for copies should be addressed to the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

Ordering data. The contract or purchase order shall specify the following:

a. CID document number and revision and CID PIN.

b Quality assurance provisions.

c. Packaging requirements.

Comments. Comments on this CID should be directed to Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

Suggested sources of supply. Suggested sources of supply are listed herein. Additional sources will be added as they become available

CID dash number (see table I) A-A-55508-	Vendor commercial PIN CAGE 71400	Vendor commercial PIN CAGE 75915
001	3835-1	556001
002	3835-2	556002
003	3835-3	556003
004	3835-4	556004
005	3835-5	556005
006	3835-6	556006
007	3835-7	556007
008	3835-8	556008
009	3835-9	556009
010	3835-10	556010
011	3835-11	556011
012	3835-12	556012

Vendor CAGE number	Vendor name and address
71400	Bussmann P.O Box 14460 St. Louis, MO 63178 (314) 527-1253
75915	Littelfuse, Incorporated 800 E. Northwest Highway Des Plaines, IL 60016 (708) 391-0898

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

Project 5920-D227

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.