INCH-POUND

MIL-DTL-83723/97C
w/AMENDMENT 2
12 March 2024
SUPERSEDING
MIL-DTL-83723/97C
w/AMENDMENT 1
27 June 2011

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, SELF-LOCKING, R.F.I. GROUNDING, CRIMP SOCKET CONTACTS), (SERIES III, CLASSES N AND S FIREWALL)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

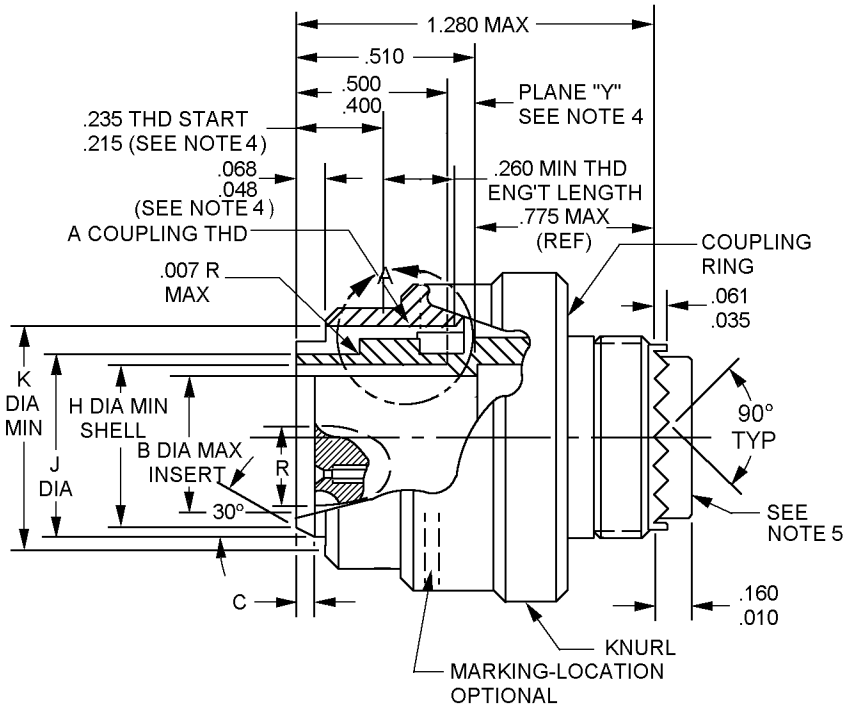


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.


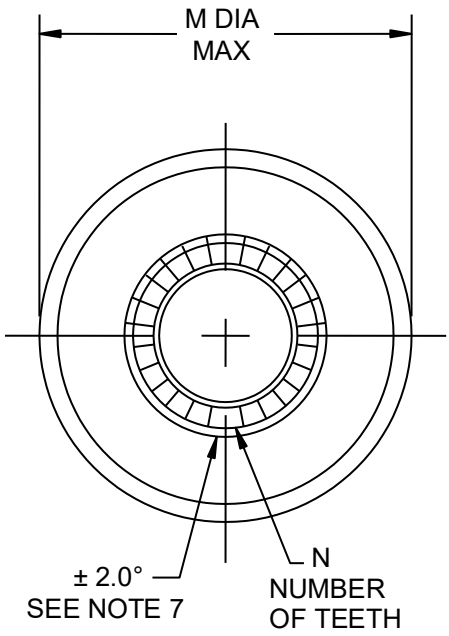


FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

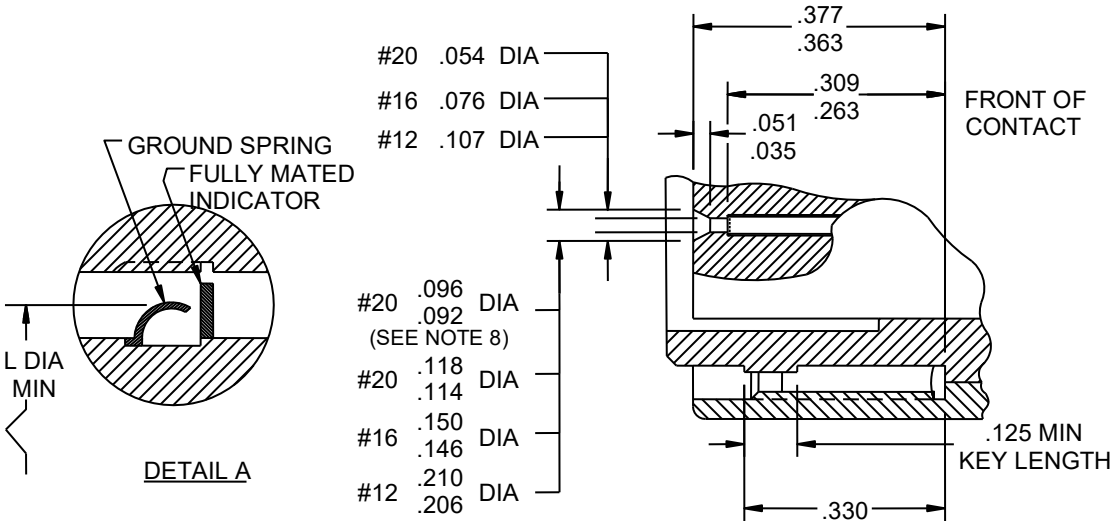

Shell size	A Thread UNEF-2B	B	C	H	J	K	L	M	N number of teeth
08	.562-24	.290	.025	.294	.405 .396	.575	.425	.967	12
10	.688-24	.388	.031	.428	.526 .517	.707	.546	1.093	15
12	.875-20	.558	.031	.598	.696 .687	.895	.711	1.170	21
14	.938-20	.627	.031	.667	.765 .756	.957	.785	1.310	24
16	1.062-18	.772	.031	.794	.892 .883	1.084	.912	1.500	30
18	1.188-18	.860	.031	.900	.998 .989	1.209	1.018	1.562	33
20	1.312-18	.985	.031	1.025	1.123 1.114	1.334	1.143	1.710	36
22	1.438-18	1.110	.031	1.150	1.248 1.239	1.459	1.268	1.812	39
24	1.562-18	1.235	.031	1.275	1.373 1.364	1.584	1.393	1.948	42

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are .005 inches (0.13 mm) for three place decimals and .01 inches (0.25 mm) for two place decimals, and angular tolerance +/- 1°0' and +/- 30'.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. The centerline of indicated projection shall be located on vertical centerline within 2.0°.
8. See table I for contact cavities requiring these dimensions.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This connector mates with MIL-DTL-83723/83, /85, /88, /89 and /90.

Insert arrangement and polarizing positions: See MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameter for lead-in chamfer on outer row of the cavities as indicated.

Shell size	Insert arrangement	Contact cavities
08	03	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

Connector accessories: See SAE-AS85049.

RFI spring strip shall have a minimum of six fingers per inch and shall point to the rear of the connector.

Part or Identifying Number (PIN) example:

M 83723/97 S 08 03 N

M	Military designation
83723/97	Specification sheet
S	Class (see MIL-DTL-83723)
08	Shell size
03	Insert arrangement
N	Polarizing position

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-DTL-26500
MIL-DTL-83723/83
MIL-DTL-83723/85
MIL-DTL-83723/88
MIL-DTL-83723/89
MIL-DTL-83723/90
MIL-STD-1554
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force - 19, 99

Preparing activity:
DLA-CC

(Project 5935-2024-106)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.