MILITARY SPECIFICATION

CONNECTORS, COAXIAL, RADIOFREQUENCY,

GENERAL SPECIFICATION FOR

This supplement forms a part of Military Specification MIL-C-39012C, dated

SPECIFICATION SHEETS

MIL-C-39012/1	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency (Series N (Cabled), Pin Contact, Class 2).
MIL-C-39012/2	-	Connectors, Plugs and Receptacles, Electrical, (Coaxial, Radio Frequency, (Series N (Cabled), Flanye Mounted, Socket Contact, Class 2).
MIL-C-39012/3	-	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series N (Cabled), Jam Nut Mounted, Socket Contact, Class 2).
MIL-C-39012/4	-	Connectors, Coaxial, Radio Frequency (Series N (Uncabled) - Receptacles - Jam Nut and Flange Mounted, Socket Contact, Class 2).
MIL-C-39012/5	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series N (Cabled), Right Angle, Pin Contact, Class 2).
MIL-C-39012/6	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series C, (Cabled), Male, Class 2).
MIL-C-39012/7	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series C, (Cabled), Female, Class 2).
MIL-C-39012/8	-	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series C, (Cabled), Female, Flanye Mounted, Rear Mounted, Class 2).
MIL-C-39012/9-	-	Connectors, Coaxial, Radio Frequency Series C (Cable-Receptacle, Female, Jam Nut, Front Mounted, Class 2).
MIL-C-39012/10	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series C, (Cabled), Male, Right Angle, Class 2).
MIL-C-39012/11	-	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series C, (Cabled), Female, Jam Nut, Rear Mounted, Class 2).
MIL-C-39012/12	-	Connectors, Coaxial, Radio Frequency, Series C (Uncabled-Receptacle, Female, Flanye Mounted, Rear Mounted, Class 2).
MIL-C-39012/13	-	Connectors, Coaxial, Radio Frequency, Series C (Uncabled-Receptacle, Female, Jam Nut Mounted, Front Mounted, Pressurized, Class 2).
MIL-C-39012/14	-	Connectors, Coaxial, Radio Frequency Series C (Uncabled-Receptacle, Female, Jam Nut Mounted, Hermetic Seal, Class 2).
MIL-C-39012/15	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency (Series C, (Cabled), Male, Class 2).
MIL-C-39012/16	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency (Series BNC (Cabled), Pin Contact, Class 2).
MIL-C-39012/17	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series BNC, (Cabled), Socket Contact, Class 2).
MIL-C-39012/18	-	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series BNC (Cabled), Socket Contact, Flange Mounted, Class 2).
MIL-C-39012/19	-	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series BNC (Cabled), Socket Contact, Jam Nut Mounted, Class 2).
MIL-C-39012/20	-	Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series BNC (Cabled), Pin Contact, Right Angle, Class 2).
MIL-C-39012/21	-	Connectors, Coaxial, Radio Frequency (Series BNC (Uncabled) - Receptacles, Female, Jam Nut Mounted, Class 2).

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

MIL-C-39012/22 - Connectors, Coaxial, Radio Frequency, (Series BNC (Uncabled) - Receptacles, Female, Flange Mounted, Class 2).

MIL-C-39012/23 - Connectors, Coaxial, Radio Frequency, (Series BNC (Uncabled) - Receptacles, Female, Right Angle, Class 2).

MIL-C-39012/24 - Connectors, Coaxial, Radio Frequency, (Series BNC (Uncabled) - Receptacles, Female, Hermetic Sealed, Jam Nut Mounted, Class 2).

MIL-C-39012/25 - Connectors, Coaxial, Radio Frequency (Hardware for Radio Frequency Coaxial Connectors).

MIL-C-39012/26 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series TNC (Cabled), Pin Contact, Class 2).

MIL-C-39012/27 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series TNC (Cabled), Socket Contact, Class 2).

MIL-C-39012/28 - Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series TNC (Cabled), Socket Contact, Jam Nut Mounted, Class 2).

MIL-C-39012/29 - Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series TNC (Cabled), Socket Contact, Flange Mounted, Class 2).

MIL-C-39012/30 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series TNC (Cabled), Pin Contact, Right Angle, Class 2).

MIL-C-39012/31 - Connectors, Coaxial, Radio Frequency, (Series TNC (Uncabled) - Receptacle, Socket, Jam Nut Mounted, Class 2).

MIL-C-39012/32 - Connectors, Coaxial, Radio Frequency Series TNC (Uncabled - Receptacle, Socket, Flange Mounted, Class 2).

MIL-C-39012/33 - Connectors, Coaxial, Radio Frequency, Series TNC (Uncabled - Receptacle, Socket, Right Angle, Class 2).

MIL-C-39012/34 - Connectors, Coaxial, Radio Frequency, Series TNC (Uncabled - Receptacle, Socket, Hermetic Sealed, Jam Nut Mounted, Class 2).

MIL-C-39012/35 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series SC (Cabled), Pin Contact, Class 2).

MIL-C-39012/36 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series SC, (Cabled), Socket Contact, Class 2).

MIL-C-39012/37 - Connectors, Coaxial, Radio Frequency Series SC (Cabled-Receptacle, Female, Jam Nut, Front Mounted, Class 2).

MIL-C-39012/38 - Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series SC (Cabled), Socket Contact, Flange Mounted, Rear Mounted, Class 2).

MIL-C-39012/39 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series SC (Cabled), Pin Contact, Right Angle, Class 2).

MIL-C-39012/40 - Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series SC (Cabled), Socket Contact, Jam Nut, Rear Mounted, Class 2).

MIL-C-39012/41 - Connectors, Coaxial, Radio Frequency Series SC (Uncabled-Receptacle, Female, Flange, Rear Mounted, Class 2).

MIL-C-39012/42 - Connectors, Coaxial, Radio Frequency, Series SC (Uncabled - Receptacle, Female, Jam Nut Mounted, Front Mounted, Class 2).

MIL-C-39012/43 - Connectors, Coaxial, Radio Frequency Series SC (Uncabled - Receptacle, Female, Jam Nut Mounted, Rear Mounted, Class 2).

MIL-C-39012/44 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series QL, (Cabled), Male, Class 2).

MIL-C-39012/45 - Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series QL, (Cabled), Female, Jam Nut Mounted, Class 2).

MIL-C-39012/46 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series QL (Cabled), Male, Right Angle, Class 2).

MIL-C-39012/47 - Connectors, Coaxial, Radio Frequency, Series QL, (Uncabled - Receptacle, Female, Jam Nut Mounted, With Solder Terminals, Class 2).

MIL-C-39012/48 - Connectors, Plug, Electrical, Coaxial, Radio Frequency, (Series QM (Cabled), Male, Class 2).

MIL-C-39012/49 - Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series QM (Cabled), Female, Bulkhead, Class 2).

MIL-C-39012/55 - Connectors, Coaxial, Radio Frequency (Series SMA (Cabled) - Plug, Pin Contact, Class 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

MIL-C-39012/56	-	Connectors, Coaxial, Radio Frequency (Series SMA (Cabled) - Plug, Pin Contact, Right Angle, Class 2).
MIL-C-39012/57	-	Connectors, Coaxial, Radio Frequency (Series SMA (Cabled) - Plug, Socket Contact, Class 2).
MIL-C-39012/58	-	Connectors, Coaxial, Radio Frequency (Series SMA (Cabled) - Receptable, Socket Contact, Flange Mounted, Class 2).
MIL-C-39012/59	-	Connectors, Coaxial, Radio Frequency (Series SMA (Cabled) - Receptacle, Socket Contact, Jam Nut Mounted, Class 2).
MIL-C-39012/60	-	Connectors, Coaxial, Radio Frequency Series SMA (Uncabled-Receptacle, Female, Flange Mounted, Class 2).
MIL-C-39012/61	-	Connectors, Coaxial, Radio Frequency Series SMA (Uncabled-Receptacle, Female, Jam Nut Mounted, Class 2).
MIL-C-39012/62	-	Connectors, Coaxial, Radio Frequency Series SMA (Uncabled-Receptacle, Female, Jam Nut Mounted, Hermetic Seal, Class 2).
MIL-C-39012/63	-	Connectors, Coaxial, Radio Frequency, Series QSC (Cabled - Plugs, Male, Class 2).
MIL-C-39012/64	-	Connectors, Coaxial, Radio Frequency, Series QSC (Cabled - Plugs, Socket Contact, Class 2).
MIL-C-39012/65	-	Connectors, Coaxial, Radio Frequency, Series QNC (Cabled - Plugs, Male, Class 2).
MIL-C-39012/66	-	Connectors, Coaxial, Radio Frequency, Series QNC (Cabled - Plugs, Female, Class 2).
MIL-C-39012/67	-	Connectors, Coaxial, Radio Frequency, Series SMB (Cabled - Plug, Female, Class 2).
MIL-C-39012/68	-	Connectors, Coaxial, Radio Frequency, Series SMB (Cabled - Plug, male, Class 2).
MIL-C-39012/69	-	Connectors, Coaxial, Radio Frequency, Series SMB (Cabled - Plug, Female, Right Angle, Class 2).
MIL-C-39012/70	-	Connectors, Coaxial, Radio Frequency, Series SMB (Cabled-Receptacle, Male, Jam-nut Mounted, Rear Mounted, Class 2).
MIL-C-39012/71	-	Connectors, Coaxial, Radio Frequency, Series SMB (Uncabled-Receptacle, Male, Jam-nut Mounted, Class 2).
MIL-C-39012/72	-	Connectors, Coaxial, Radio Frequency, Series SMB (Uncabled-Receptacle, Male Jam-nut Mounted, Hermetic Seal, Class 2).
MIL-C-39012/73	-	Connectors, Coaxial, Radio Frequency, Series SMC (Cabled-Plug, Female, Class 2).
MIL-C-39012/74	-	Connectors, Coaxial, Radio Frequency, Series SMC (Cabled-Plug, male, Class 2).
MIL-C-39012/75	-	Connectors, Coaxial, Radio Frequency, Series SMC (Cabled-Plug, Female, Right Angle, Class 2).
MIL-C-39012/76	-	Connectors, Coaxial, Radio Frequency, Series SMC (Cabled-Receptacle, Male Jamnut Mounted, Rear Mounted, Class 2).
MIL-C-39012/77	-	Connectors, Coaxial, Radio Frequency, Series SMC (Uncabled-Receptacle, Male Jamnut Mounted, Class 2).
MIL-C-39012/78	-	Connectors, Coaxial, Radio Frequency, Series SMC (Uncabled-Receptacle, Male Jamnut Mounted, Hermetic Seal, Class 2).
MIL-C-39012/79	-	Connectors, Coaxial, Radio Frequency, Series SMA (Cabled-Plug, Pin, Class 2, Semirigid Cable).
MIL-C-39012/80	-	Connectors, Coaxial, Radio Frequency, Series SMA (Cabled-Plug, Pin, Right Angle, Class 2, Semirigid Cable).
MIL-C-39012/81	-	Connectors, Coaxial, Radio Frequency, Series SMA (Cabled-Plug, Socket, Class 2, Semirigid Cable).
MIL-C-39012/82	-	Connectors, Coaxial, Radio Frequency, Series SMA (Cabled-Receptacle, Socket, Flange Mounted, Class 2, Semirigid Cable).
MIL-C-39012/83	-	Connectors, Coaxial, Radio Frequency, Series SMA (Cabled-Receptacle, Socket Jam Nut Mounted, Class 2, Semirigid Cable).
MIL-C-39012/84	-	Connectors, Coaxial, Radio Frequency, Series QSC (Cabled-Plugs, Pin Contact, Right Angle, Class 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

MIL-C-39012/85 - Connectors, Coaxial, Radio Frequency, Series QSC (Cabled-Receptacle, Socket Contact, Jam Nut Rear Mounted, Class 2).

MIL-C-39012/86 - Connectors, Coaxial, Radio Frequency, Series QSC (Cabled-Receptacle, Socket Contact, Jam Nut, Front Mounted, Class 2).

MIL-C-39012/87 - Connectors, Coaxial, Radio Frequency, Series QSC (Uncabled - Receptacle, Socket Contact, Hermetic Sealed, Jam Nut, Front and Rear Mounted, Class 2).

MIL-C-39012/88 - Connectors, Coaxial, Radio Frequency, Series QNC (Cabled - Plugs, Pin Contact, Right Angle, Class 2).

MIL-C-39012/89 - Connectors, Coaxial, Radio Frequency, Series QNC (Cabled - Receptacle, Socket Contact, Jam Nut Mounted, Class 2).

MIL-C-39012/90 - Connectors, Coaxial, Radio Frequency, Series, QNC (Uncabled-Receptacle, Socket Contact, Jam Nut, Front and Rear Mounted, Class 2).

MIL-C-39012/91 - Connectors, Coaxial, Radio Frequency, Series QNC (Uncabled -Receptacle, Socket Contact, Hermetic Sealed, Jam Nut, Front and Rear Mounted, Class 2).

MIL-C-39012/92 - Connectors, Coaxial, Radio Frequency, (Series SMA (Cabled) - Plug, Class 2, Without Contact, .141 Semirigid Cable).

MIL-C-39012/93 - Connectors, Coaxial, Radio Frequency, Series SMA (Uncabled-Receptacle, Female, Printed Circuit, Class 2).

MIL-C-39012/94 - Connectors, Coaxial, Radio Frequency, Series SMA (Uncabled-Receptacle, Female, Printed Circuit, Right Angle, Class 2).

MIL-C-39012/95 - Connectors, Coaxial, Radio Frequency, Series SMA, (Uncabled-Receptacle, Male Printed Circuit, Class 2).

MIL-C-39012/96 - Connectors, Coaxial, Radio Frequency, Series SMA (Uncabled-Receptacle, Male Printed Circuit, Right Angle, Class 2).

MIL-C-39012/100 - Connectors, Coaxial, Radio Frequency, High Voltage (Series MHV (Cabled) - Plug, Pin Contact, Class 2).

MIL-C-39012/101 - Connectors, Coaxial, Radio Frequency, (Series MHV (Cabled) - Plug, Socket Contact, Class 2).

MIL-C-39012/102 - Connectors, Coaxial, Radio Frequency, (Series MHV (Cabled) - Receptacles, Socket Contact, Flange Mounted, Class 2).

MIL-C-39012/103 - Connectors, Coaxial, Radio Frequency, (Series MHV (Uncabled)-Receptacles, Female, Flange Mounted, Class 2).

MIL-C-39012/104 - Connectors, Coaxial, Radio Frequency, High Voltage (Series MHV) (Uncabled) - Receptacles, Socket Contact, Jam Nut Mounted, Class 2).

MIL-C-39012/105 - Connectors, Coaxial, Radio Frequency, High Voltage, (Series SHV (Cabled) - Plug, Socket Contact, Class 2).

MIL-C-39012/106 - Connectors, Coaxial, Radio Frequency, High Voltage, (Series SHV (Cabled) - Plug, Socket Contact, Right Angle, Class 2).

MIL-C-39012/107 - Connectors, Coaxial, Radio Frequency, High Voltage, (Series SHV (Cabled) - Receptacles, Pin Contact, Class 2).

MIL-C-39012/108 - Connectors, Coaxial, Radio Frequency, High Voltage, (Series SHV (Cabled) - Receptacles, Pin Contact, Flange Mounted, Class 2).

MIL-C-39012/109 - Connectors, Coaxial, Radio Frequency, High Voltage, (Series SHV (Uncabled) - Receptacles, Pin Contact, Flange Mounted, Class 2).

MIL-C-39012/110 - Connectors, Coaxial, Radio Frequency, High Voltage, (Series SHV (Uncabled) - Receptacles, Pin Contact, Jam Nut Mounted, Class 2).

MIL-C-39012/111 - Connectors, Coaxial, Radio Frequency, High Voltage, (Series SHV (Cabled) - Receptacles, Pin Contact, Jam Nut Mounted, Class 2).

MIL-C-39012/112 - Connectors, Coaxial, Radio Frequency, (Series TNC (Cabled) - Plug, Pin Contact, Class 2). For Semi-rigid cable.

MIL-C-39012/113 - Connectors, Coaxial, Radio Frequency, (Series TNC (Cabled) - Plug, Socket Contact, Class 2). For Semi-rigid cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.




MIL-C-39012/114	-	Connectors, Coaxial, Radio Frequency, (Series TNC (Cabled) - Plug, Pin Contact, Right Angle, Class 2). For Semi-rigid cable.
MIL-C-39012/115	-	Connectors, Coaxial, Radio Frequency, (Series TNC (Cabled) - Receptacle, Socket Contact, Jam Nut Mounted, Class 2). For Semi-Rigid Cable.
MIL-C-39012/116	-	Connectors, Coaxial, Radio Frequency, (Series TNC (Cabled) - Receptacle, Socket Contact, Flange Mounted, Class 2). For Semi-Rigid Cable.
MIL-C-39012/117(EC)	-	Connectors, Coaxial, Radio Frequency, Series N (Plugs and Jacks, Semi-Rigid Cable, Male, Class 2) (For use with MIL-C-28830/3).
MIL-C-39012/118(EC)	-	Connectors, Coaxial, Radio Frequency, Series N (Plugs and Jacks, Semi-Rigid Cable, Female, Class 2) (For use with MIL-C-28830/3).
MIL-C-39012/119(EC)	-	Connectors, Coaxial, Radio Frequency, Series N (Plugs and Jacks, Semi-Rigid Cable, Male, Class 2) (For use with MIL-C-28830/4).
MIL-C-39012/120(EC)	-	Connectors, Coaxial, Radio Frequency, Series N (Plug and Jacks, Semi-Rigid Cable, Female, Class 2) (For use with MIL-C-28830/4).
MIL-C-39012/121(EC)	-	Connectors, Coaxial, Radio Frequency, Series N (Plug and Jacks, Semi-Rigid Cable, Female, Class 2) (For use with MIL-C-28830/5).
MIL-C-39012/122(EC)	-	Connectors, Coaxial, Radio Frequency, Series EIA Flange (Semi-rigid cable, Class 2) (For use with MIL-C-28830/3).
MIL-C-39012/123(EC)	-	Connectors, Coaxial, Radio Frequency, Series EIA Flange (Semi-rigid cable, Class 2) (For use with MIL-C-28830/4).
MIL-C-39012/124(EC)	-	Connectors, Coaxial, Radio Frequency, Series EIA Flange (Semi-rigid cable, Class 2) (For use with MIL-C-28830/5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

SECTION 2

CONNECTOR SELECTION GUIDE




Series BNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		16	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 95-RG180A 97-RG210A 84-RG223 110-RG302A 111-RG303 113-RG316 119-RG174 128-RG400
Cabled plug, Male, Pin, Right Angle, Class 2		20	28-RG58 54-RG122 60-RG142 95-RG180A 84-RG223 110-RG302A 111-RG303 113-RG316 119-RG174 128-RG400
Cabled plug, Female, Socket, Straight, Class 2		17	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 95-RG180A 97-RG210A 84-RG223 110-RG302A 111-RG303 113-RG316 119-RG174 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

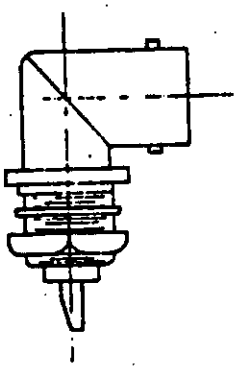


Series BNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable MIL/
Uncabled Receptacle, Female, Socket, Hermetic, Jam Nut, Rear Mounted, Class 2	 Hermetic	24	Not applicable
Uncabled Receptacle, Female, Socket, Jam Nut, Front Mounted, Class 2		21	Not applicable
Cabled Receptacle, Female, Socket, Jam Nut, Rear Mounted, Class 2		19	28-RG58 29-RG59Δ 30-RG62Δ 90-RG71Δ 54-RG122 60-RG142 95-RG180Δ 97-RG210Δ 84-RG223 110-RG302Δ 111-RG303 113-RG316 119-RG174 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

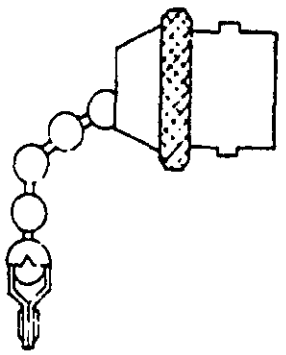
Series BNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Female, Socket, Right Angle, Jam Nut, Front Mounted, Class 2		23	Not applicable
Uncabled Receptacle, Female, Socket, Flange Mounted, Class 2		22	Not applicable
Cabled Receptacle, Female, Socket, Flange Mounted, Class 2		18	28-RG58 29-RG59A 30-RG62A 90-RG71A 58-RG122 60-RG142 95-RG180A 97-RG210A 88-RG223 110-RG302A 111-RG303 113-RG316 119-RG174 128-RG400


See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

All MIL-C-39012 Series

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Caps, Covers, Shorting Plugs, Hardware		25	Not applicable



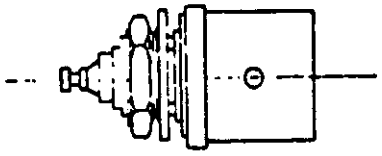
Series C

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		6	6-RG11A 92-RG115 65-RG165 72-RG211 73-RG212 74-RG213 75-RG214 76-RG215 78-RG217 79-RG218 RG-225/U 112-RG304
		15 1/	28-RG58 29-RG59A 30-RG62A 90-RG71A 84-RG223

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.


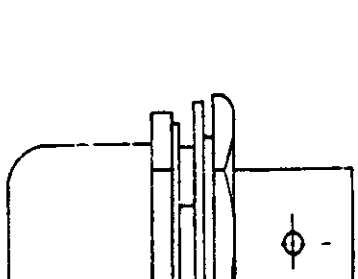
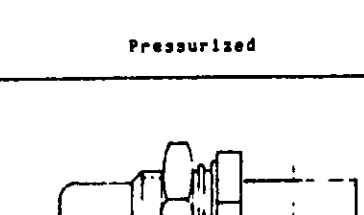
Series C

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable MIL/
Cabled plug, Male, Pin, Right Angle, Class 2		10	92-RG115 65-RG165 74-RG213 75-RG214 74-RG215 RG-225/U
Cabled plug, Female, Socket, Straight, Class 2		7	6-RG11A 92-RG115 65-RG165 73-RG212 74-RG213 75-RG214 74-RG215 RG-225/U 112-RGJ04
Uncabled Receptacle, Female, Socket, Pressurized, Jam Nut, Front Mounted, Class 2		13	Not applicable

See footnotes end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.



Series C

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Female, Socket, Hermetic, Jam Nut, Rear Mounted, Class 2	 Hermetic	18	Not applicable
Cabled Receptacle, Female, Socket, Pressurized, Jam Nut, Rear Mounted, Class 2	 Pressurized	11	6-RG11A 92-RG11S 65-RG16S 73-RG212 74-RG213 75-RG214 76-RG215 RG-225/U 112-RG304
Cabled Receptacle, Female, Socket, Jam Nut, Front Mounted, Class 2		9 1/	28-RG58 29-RG59A 30-RG62A 90-RG71A 84-RG223


See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series C

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Female, Socket, Flange Mounted, Rear Mounted, Class 2		12	Not applicable
Cabled Receptacle Female, Socket, Flange Mounted, Rear Mounted, Class 2		8	92-RG115 65-RG155 73-RG212 74-RG213 75-RG214 74-RG215 RG-225/U 112-RG304


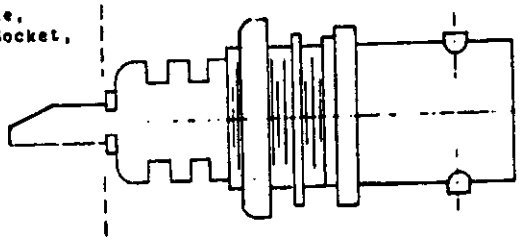
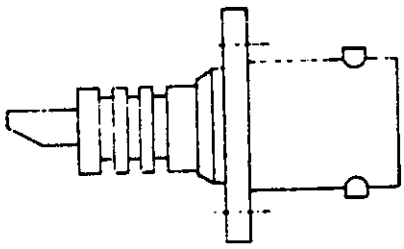
Series MHV

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		100 1/	29-RG59A 30-RG62A 90-RG71A 97-RG210A

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

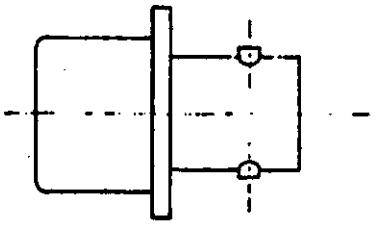
Series MHV

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Female, Socket, Straight, Class 2		101 1/	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ
Uncabled Receptacle, Female, Socket, Jam Nut, Class 2		104 1/	Not applicable
Uncabled Receptacle, Female, Socket, Flange Mounted, Class 2		103 1/	Not applicable


See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series MRV

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Flange Mounted, Class 2		102 1/	29-RG59A 30-RG62A 90-RG71A 97-RG210A


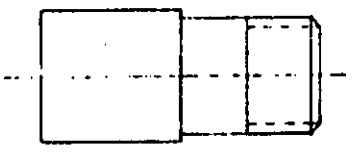
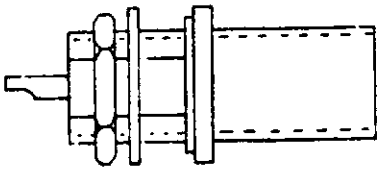
Series N

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		1	2-RG6A 5-RG11A 60-RG142 62-RG144 65-RG165 73-RG212 74-RG213 75-RG214 76-RG215 77-RG216A 78-RG217 79-RG218 RG-222/U RG-225/U 127-RG393 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.


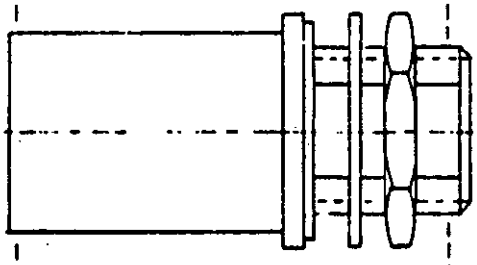

Series N

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Right Angle, Class 2		5	2-RG6A 6-RG11A 60-RG142 62-RG144A 65-RG165 73-RG212 74-RG213 75-RG214 77-RG216A RG-222/U RG-225/U 127-RG393 128-RG400
Cabled plug, Female, Socket, Straight, Class 2		2	2-RG6A 6-RG11A 60-RG142 62-RG144A 65-RG165 73-RG212 74-RG213 75-RG214 74-RG215 77-RG216A 78-RG217 RG-222/U RG-225/U 127-RG393 128-RG400
Uncabled Receptacle, Female, Socket, Jam Nut, Front Mounted, Class 2		4	Not applicable

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.


Series N

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Female, Socket, Jam Nut, Rear Mounted, Class 2		4	Not applicable
Cabled Receptacle, Female, Socket, Jam Nut, Rear Mounted, Class 2		3	2-RG6A 6-RG11A 60-RG142 62-RG144A 65-RG165 73-RG212 74-RG213 75-RG214 77-RG216A 78-RG217 RG-222/U RG-225/U 127-RG393 128-RG400
Uncabled Receptacle, Female, Socket, Flange Mounted, Rear Mounted, Class 2		4	Not applicable

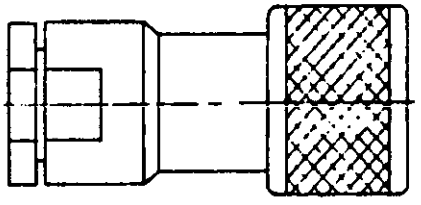

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series N

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Flange Mounted, Class 2		2	2-RG6A 6-RG11A 60-RG142 62-RG144A 65-RG165 73-RG212 74-RG213 75-RG214 76-RG215 77-RG216A RG-222/U RG-225/U 127-RG393 128-RG400

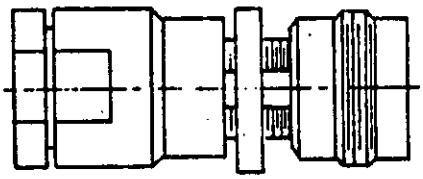
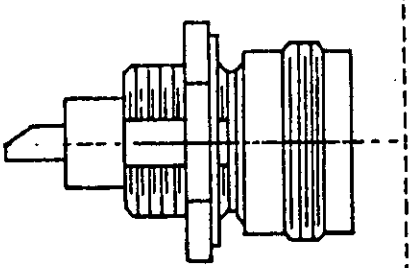
Series QL

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		44	79-RG218 RG-220/U
Cabled plug, Male, Pin, Right Angle, Class 2		46	79-RG218 RG-220/U

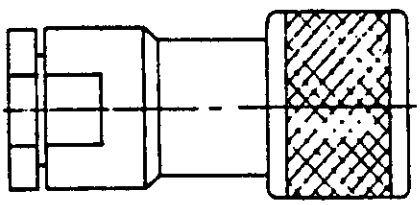
See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series QL

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Straight, Class 2		45	79-RG218 RG-220/U
Uncabled Receptacle, Female, Socket, Front Mounted, Jam Nut, Class 2		47	Not applicable

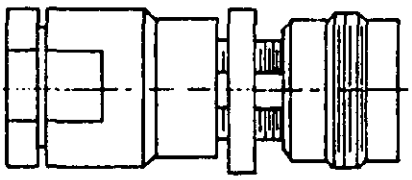
Series QM

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		48	78-RG217

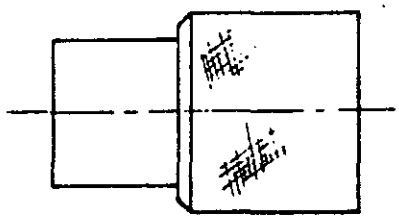
See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series QM

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Straight, Class 2		49	78-RG217

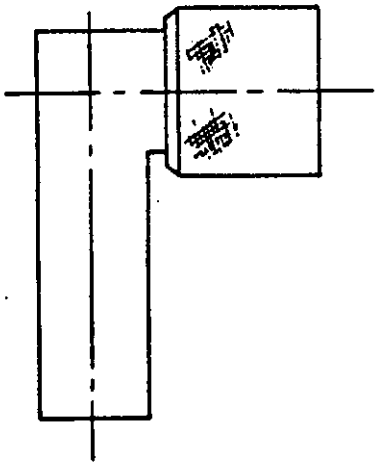
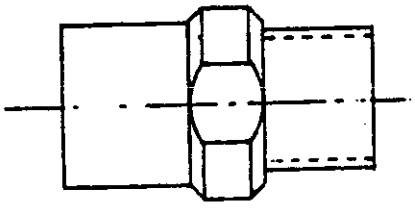
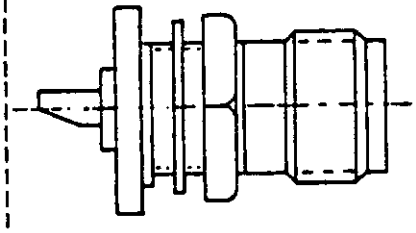
Series QNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		65	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 97-RG210A 84-RG223 110-RG302A 111-RG303

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

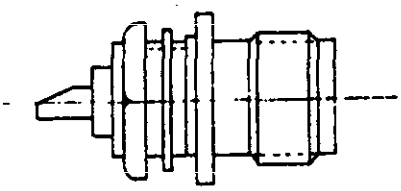
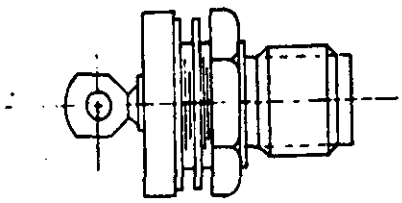
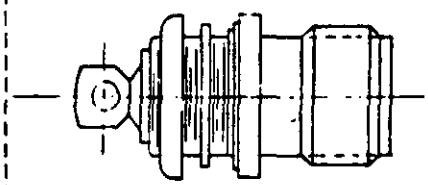
Series QMC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Right Angle, Class 2		88	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 97-RG210A 84-RG223 110-RG302A 111-RG303
Cabled plug, Female, Socket, Straight, Class 2		66	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 97-RG210A 84-RG223 110-RG302A 111-RG303
Uncabled Receptacle, Rear Mounted, Jam Nut, Class 2		90	Not applicable

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

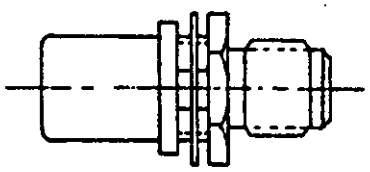
Series QNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Front Mounted, Jam Nut, Class 2		90	Not applicable
Uncabled Receptacle, Hermetic, Rear Mounted, Jam Nut, Class 2	 Hermetic	91	Not applicable
Uncabled Receptacle, Hermetic, Front Mounted, Jam Nut, Class 2	 Hermetic	91	Not applicable

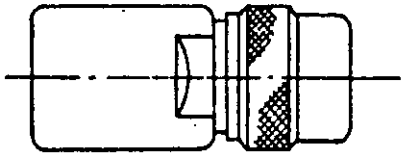
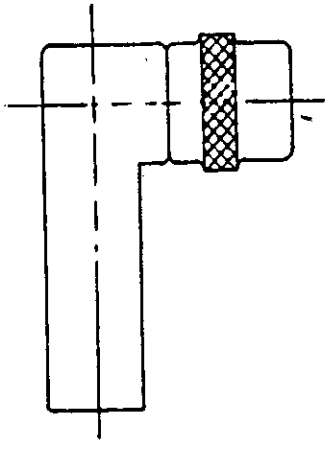
See footnotes at end of section 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series QMC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Rear Mounted, Jam Nut, Class 2		89	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 97-RG210A 84-RG223 110-RG302A 111-RG303

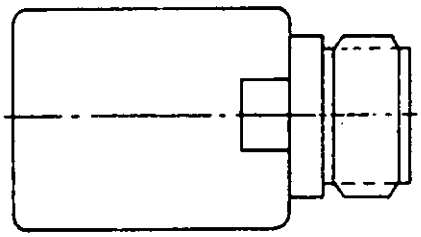

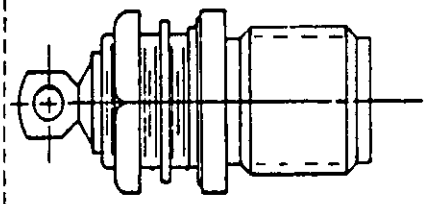
Series QSC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		63	2-RG6A 6-RG11A 65-RG165 72-RG211 73-RG212 74-RG213 75-RG214 77-RG216A 78-RG217 79-RG218 RG-225/U 112-RG304
Cabled plug, Male, Pin, Right Angle, Class 2		84	2-RG6A 6-RG11A 65-RG165 72-RG211 73-RG212 74-RG213 75-RG214 77-RG216A 78-RG217 79-RG218 RG-225/U 112-RG304

See footnotes at end of section 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

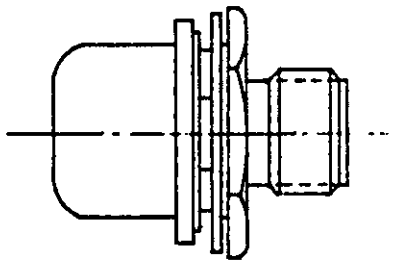
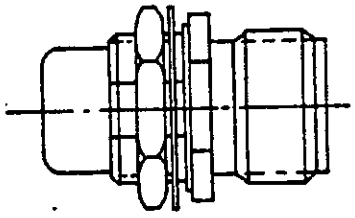
Series QSC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Female, Socket, Straight, Class 2		64	2-RG6A 6-RG11A 65-RG165 73-RG212 74-RG213 75-RG214 77-RG216A RG-225/U 112-RG304
Uncabled Receptacle, Hermetic, Rear Mounted, Jam Nut, Class 2	 Hermetic	87	Not applicable
Uncabled Receptacle, Hermetic, Front Mounted, Jam Nut, Class 2	 Hermetic	87	Not applicable


See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series QSC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Rear Mounted, Jam Nut, Class 2		85	2-RG6A 6-RG11A 65-RG165 72-RG211 73-RG212 74-RG213 75-RG214 77-RG216A 78-RG217 79-RG218 RG-225/U 112-RG304
Cabled Receptacle, Front Mounted, Jam Nut, Class 2		86	2-RG6A 6-RG11A 65-RG165 72-RG211 73-RG212 74-RG213 75-RG214 77-RG216A 78-RG217 79-RG218 RG-225/U 112-RG304

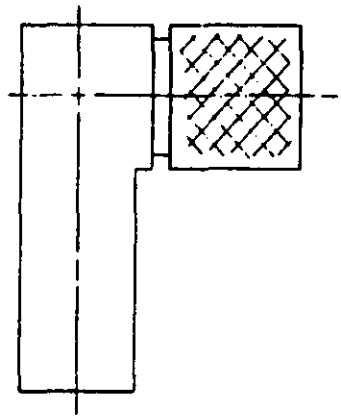
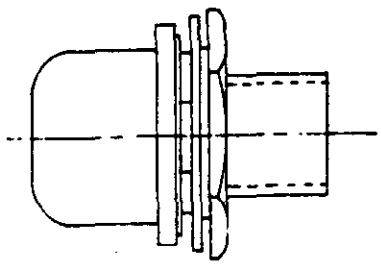
Series SC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		35	6-RG11A 92-RG115 60-RG142 62-RG144A 65-RG165 72-RG211 73-RG212 74-RG213 75-RG214 76-RG215 78-RG217 79-RG218 RG-225/U 112-RG304 127-RG393 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.



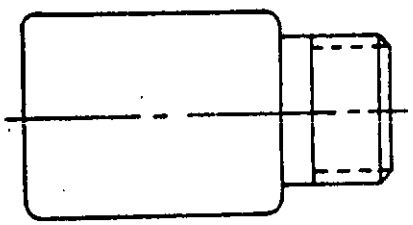
Series SC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Right Angle, Class 2		39	92-RG115 60-RG142 65-RG165 74-RG213 75-RG214 74-RG215 RG-225/U 127-RG393 128-RG400
Cabled Receptacle, Female, Socket, Rear Mounted, Jam Nut, Class 2		40	6-RG11A 92-RG115 60-RG142 62-RG144A 65-RG165 73-RG212 74-RG213 75-RG214 74-RG215 77-RG216A 78-RG217 79-RG218 RG-225/U 112-RG304 127-RG393 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

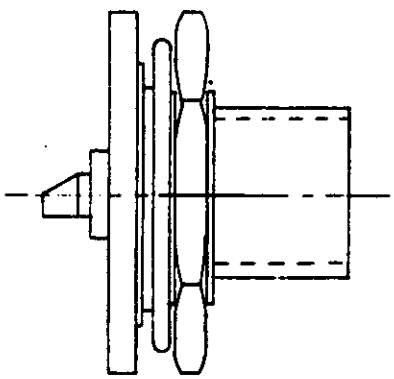
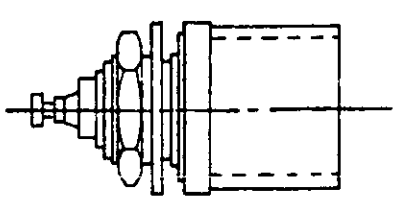
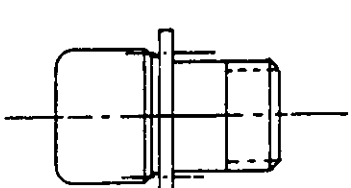
Series SC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Front Mounted, Jam Nut, Class 2		37 1/	28-RG58 29-RG59A 30-RG62A 90-RG71A 84-RG223
Uncabled Receptacle, Female, Socket, Flange Mounted, Class 2		41	Not applicable
Cabled plug, Female, Socket, Straight, Class 2		36	6-RG11A 92-RG115 60-RG142 62-RG148A 65-RG165 72-RG211 73-RG212 74-RG213 75-RG214 76-RG215 78-RG217 79-RG218 RG-225/U 112-RG304 127-RG393 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

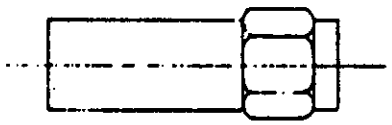
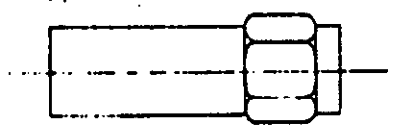

Series SC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Female, Socket, Rear Mounted, Jam Nut, Class 2		43	Not applicable
Uncabled Receptacle, Female, Socket, Front Mounted, Jam Nut, Class 2		42	Not applicable
Cabled Receptacle, Female, Socket, Flange Mounted, Rear Mounted, Class 2		38	92-RG115 60-RG142 65-RG165 73-RG212 74-RG213 75-RG214 74-RG215 RG-225/U 112-RG304 127-RG393 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.




Series SMA

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		55	28-RG58 54-RG122 60-RG142 119-RG174 93-RG178 84-RG223 111-RG303 113-RG316 128-RG400
Cabled plug, Male, Pin, Straight, Semirigid Cable, Class 2	 For Semirigid Cable	79	130-RG402 133-RG405
Cabled plug, Male, Pin, Straight, Semirigid Cable, Class 2	 For Semirigid Cable	92	130-RG402

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

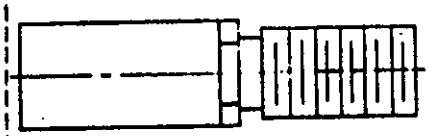


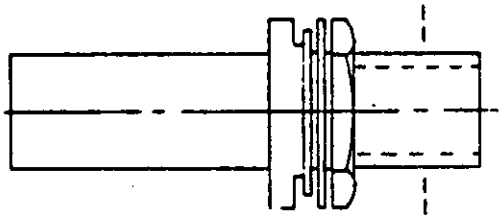
Series SMA

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Right Angle, Class 2		56	28-RG58 54-RG122 60-RG142 119-RG174 93-RG178 84-RG223 111-RG303 113-RG316 128-RG400
Cabled plug, Male, Pin, Right Angle, Semirigid Cable, Class 2	 For Semirigid Cable	80	130-RG402 133-RG405
Cabled plug, Female, Socket, Straight, Class 2		57	28-RG58 54-RG122 60-RG142 119-RG174 93-RG178 84-RG223 111-RG303 113-RG316 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

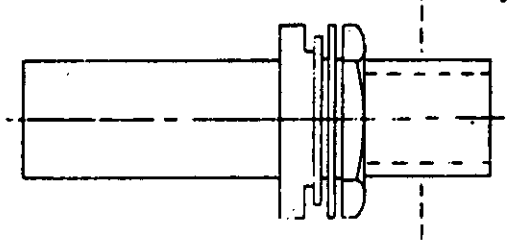
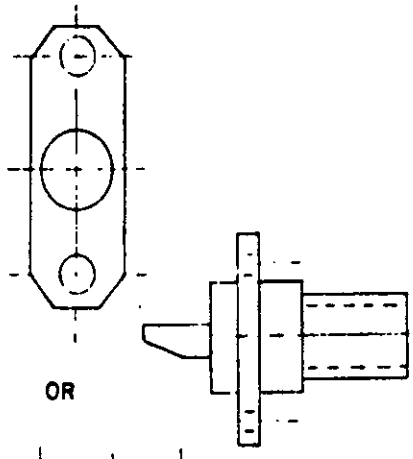

Series SMA

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Female, Socket, Straight, Semirigid Cable, Class 2	 For Semirigid Cable	61	130-RG402 133-RG405
Uncabled Receptacle, Female, Socket, Jam Nut, Class 2		61	Not applicable
Uncabled Receptacle, Female, Socket, Hermetic, Jam Nut, Class 2	 Hermetic	62	Not applicable
Cabled Receptacle, Female, Socket, Jam Nut, Class 2		59	28-RG58 54-RG122 60-RG142 119-RG174 93-RG178 84-RG223 111-RG303 113-RG316 126-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

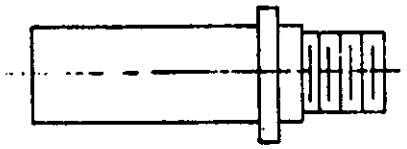
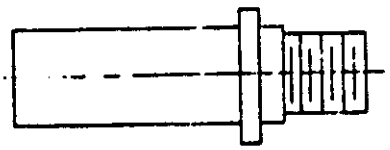
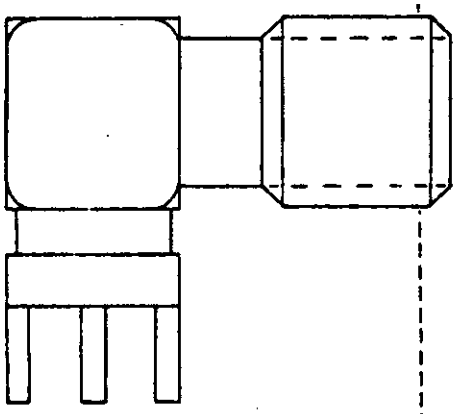
Series SMA

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Semirigid Cable, Jam Nut, Class 2	 For Semirigid Cable	83	130-RG402 133-RG405
Uncabled Receptacle, Female, Socket, Flange Mounted, Class 2	 OR 	60	Not applicable

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

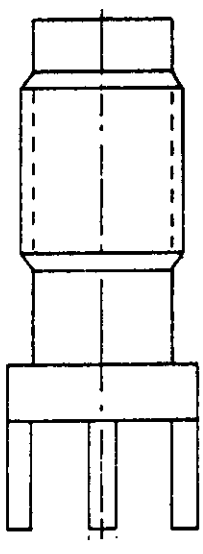
Series SMA

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Flange Mounted, Class 2		58	28-RG58 54-RG122 60-RG142 119-RG174 93-RG178 84-RG223 111-RG303 113-RG316 128-RG400
Cabled Receptacle, Female, Socket, Semirigid Cable, Flange Mounted, Class 2	 For Semirigid Cable	82	130-RG402 133-RG405
Uncabled Receptacle, Female, Socket, Printed Circuit, Right Angle, Class 2	 For Printed Circuit Boards	94	Not applicable

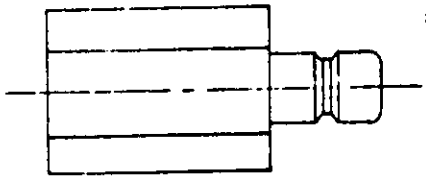
See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series SMA

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Female, Socket, Printed Circuit, Straight, Class 2	 For Printed Circuit Boards	93	Not applicable

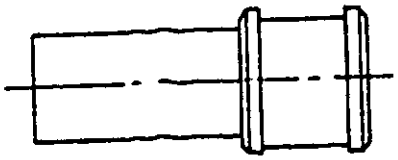
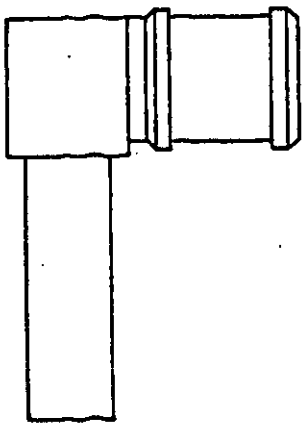
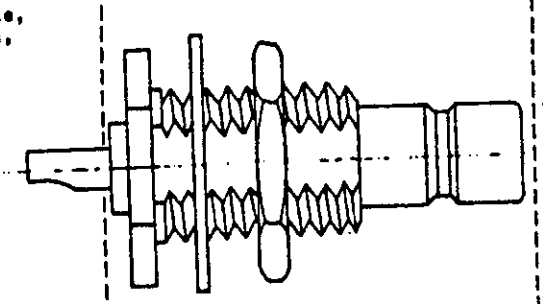
Series SMB

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		68	119-RG174 93-RG178 94-RG179Δ 113-RG316

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

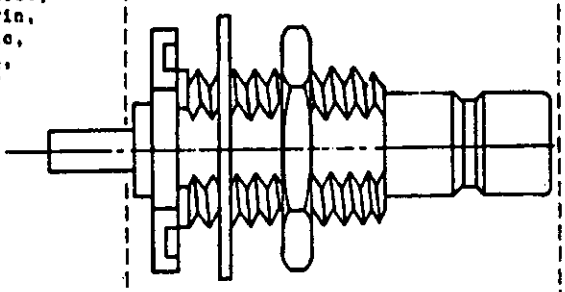
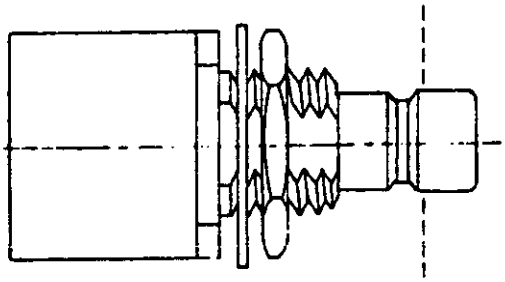
Series SMB

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Female, Socket, Straight, Class 2		67	119-RG174 93-RG178 94-RG179A 113-RG316
Cabled plug, Female, Socket, Right Angle, Class 2		69	119-RG174 93-RG178 94-RG179A 113-RG316
Uncabled Receptacle, Male, Pin, Jam Nut, Class 2		71	Not applicable solder termination

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

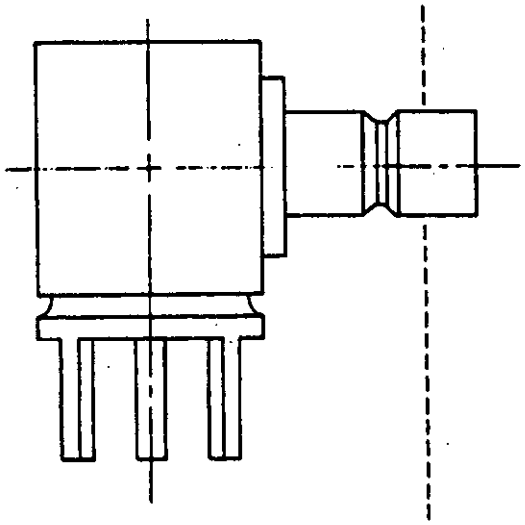
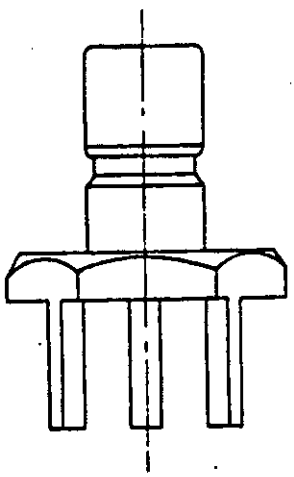
Series SMB

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Male, Pin, Hermetic, Jam Nut, Class 2	 Hermetic	72	Not applicable solder termination
Cabled Receptacle, Male, Pin, Jam Nut, Class 2		70	119-RG174 93-RG178 94-RG179Δ 113-RG316

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.



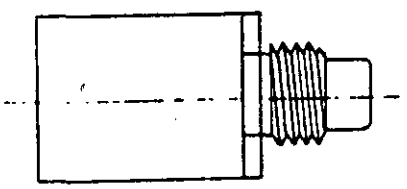
Series SMB

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Male, Pin, Printed Circuit, Right Angle, Class 2	 For Printed Circuit Boards	96	Not applicable
Uncabled Receptacle, Male, Pin, Printed Circuit, Straight, Class 2	 For Printed Circuit Boards	95	Not applicable

See footnotes at end of section 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

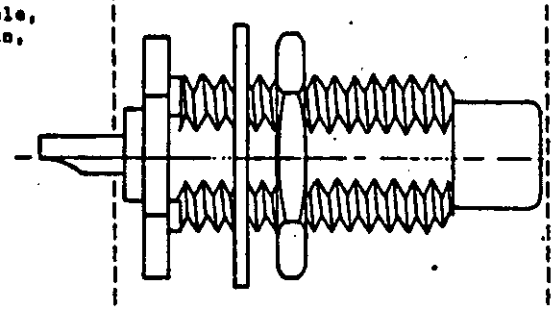
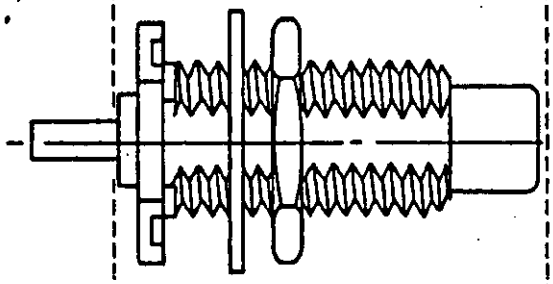
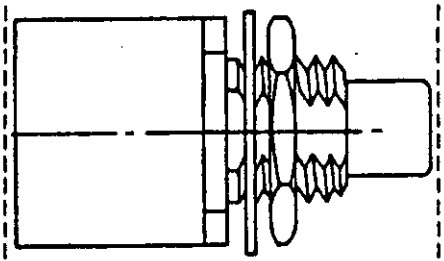
Series SMC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Female, Socket, Straight, Class 2		73	119-RG174 93-RG178 94-RG179A 113-RG316
Cabled plug, Female, Socket, Right Angle, Class 2		75	119-RG174 93-RG178 94-RG179A 113-RG316
Cabled plug, Male, Pin, Straight, Class 2		74	119-RG174 93-RG178 94-RG179A 113-RG316

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.


Series SMC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Male, Pin, Jam Nut, Class 2		77	Not applicable
Uncabled Receptacle, Male, Pin, Hermetic, Jam Nut, Class 2	 Hermetic	78	Not applicable
Cabled Receptacle, Male, Pin, Jam Nut, Class 2		76	119-RG174 93-RG178 94-RG179A 113-RG316

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

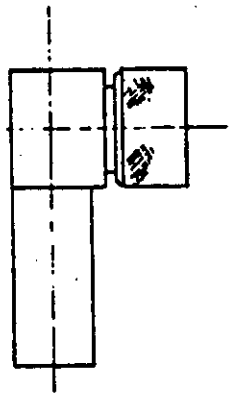

Series TNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Straight, Class 2		26	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 119-RG174 95-RG180A 97-RG210A 84-RG223 110-RG302A 111-RG303 113-RG316 128-RG400
Cabled plug, Male, Pin, Semirigid Cable, Straight, Class 2	 For Semirigid Cable	112	129-RG401 130-RG402
Cabled plug, Male, Pin, Right Angle, Class 2		30	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 119-RG174 95-RG180A 97-RG210A 84-RG223 110-RG302A 111-RG303 113-RG316 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.


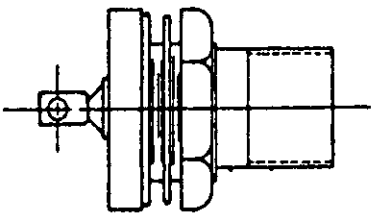
Series TNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Male, Pin, Semirigid Cable, Right Angle, Class 2	 For Semirigid Cable	114	129-RG401 130-RG402
Cabled plug, Female, Socket, Straight, Class 2		27	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 119-RG174 95-RG180A 97-RG210A 84-RG223 110-RG302A 111-RG303 113-RG316 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

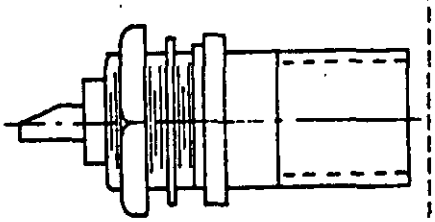
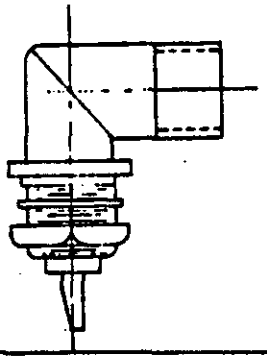

Series TNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, Female, Socket, Semirigid Cable, Straight, Class 2	 For Semirigid Cable	113	129-RG401 130-RG402
Uncabled Receptacle, Female, Socket, Hermetic, Jam Nut, Rear Mounted, Class 2	 Hermetic	34	Not applicable

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.




Series TNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled Receptacle, Female, Socket, Jam Nut, Front Mounted, Class 2		31	Not applicable
Uncabled Receptacle, Female, Socket, Right Angle, Jam Nut, Front Mounted, Class 2		33	Not applicable
Cabled Receptacle, Female, Socket, Jam Nut, Rear Mounted, Class 2		28	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 119-RG174 95-RG180A 97-RG210A 84-RG223 110-RG302A 111-RG303 113-RG316 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

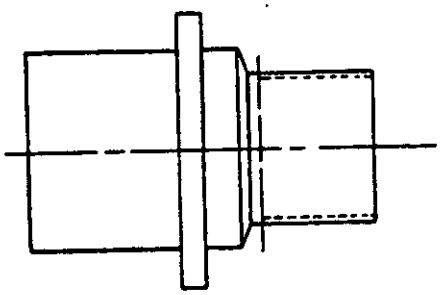
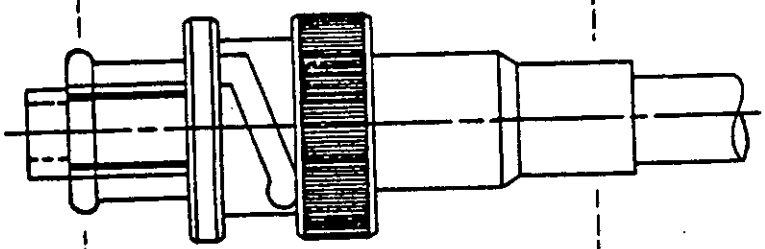
Series TNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Semirigid Cable, Jam Nut, Rear Mounted, Class 2	 For Semirigid Cable	115	129-RG401 130-RG402
Uncabled Receptacle, Female, Socket, Flange Mounted, Class 2		32	Not applicable
Cabled Receptacle, Female, Socket, Flange Mounted, Class 2		29	28-RG58 29-RG59A 30-RG62A 90-RG71A 54-RG122 60-RG142 119-RG174 95-RG180A 97-RG210A 84-RG223 110-RG302 111-RG303 113-RG316 128-RG400

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

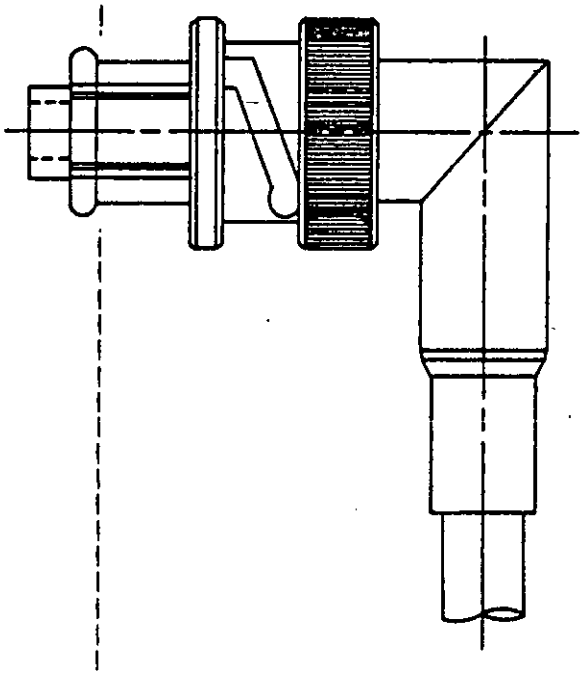
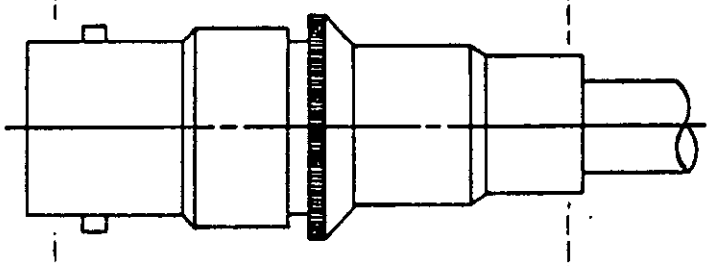
Series TNC

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled Receptacle, Female, Socket, Semirigid Cable, Flange Mounted, Class 2		116	129-RG401 130-RG402
Series SHV			
Cabled plug, female socket, straight, class 2		105	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

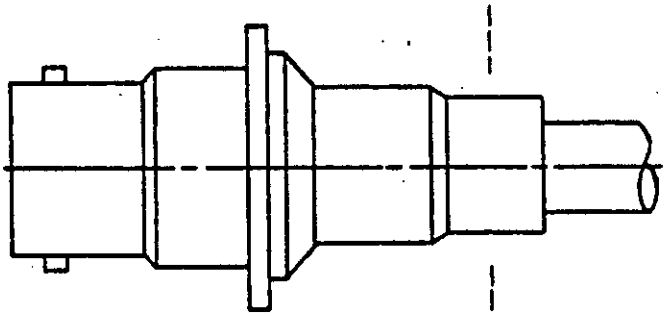
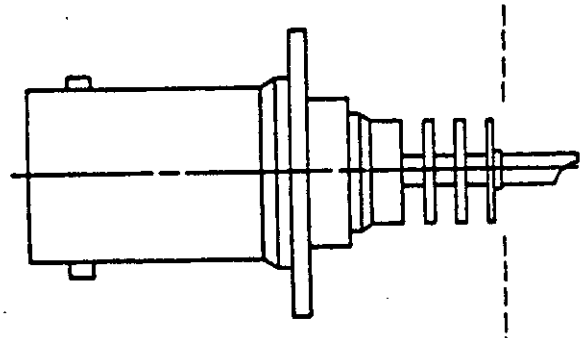
Series SHV

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled plug, female socket right angle, class 2		106	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ
Cabled receptacles, male pin, straight, class 2		107	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

See footnotes at end of section 2.

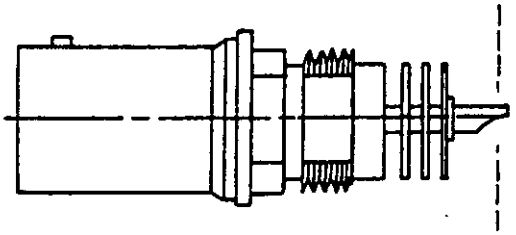
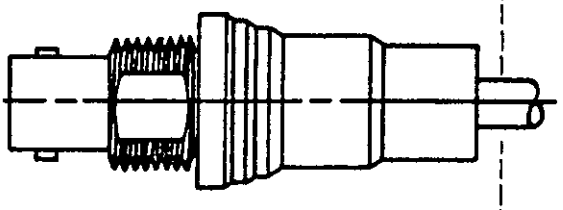
Series SHV

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Cabled receptacle flange mounted pin, straight class 2		108	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ
Uncabled receptacle, flange mounted, male pin, straight, class 2		109	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ

See footnotes at end of section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.

Series SHV

Description	Body style	Specification sheet MIL-C-39012/	Applicable cable M17/
Uncabled receptacle, jam nut front mounted, male pin, straight, class 2		110	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ
Cabled receptacles, jam nut rear mounted, male pin, straight, class 2		111	29-RG59Δ 30-RG62Δ 90-RG71Δ 97-RG210Δ

1/ Specification sheets which are inactive for new design.
Δ Denotes non-50 ohm coaxial cables.

Preparing activity:
Army - CR

(Project 5935-3183-32)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:36Z
Check the source to verify that this is the current version before use.