# MILITARY STANDARD

MIL-STD 1320 213
(NAVY)


22 OCTOBER 1984

## TRUCKLOADING
## AIRBOC
## IN PALLET CRATE, CNU-313/E

### CONTAINER DATA

| | |
|---|---|
| LENGTH | 48 |
| WIDTH | 44 |
| HEIGHT | 43 3/4 |
| GROSS WT | 1430 LBS |
| CUBE | 53.5 CU FT |

DOT HAZARD CLASSIFICATION EXPL C

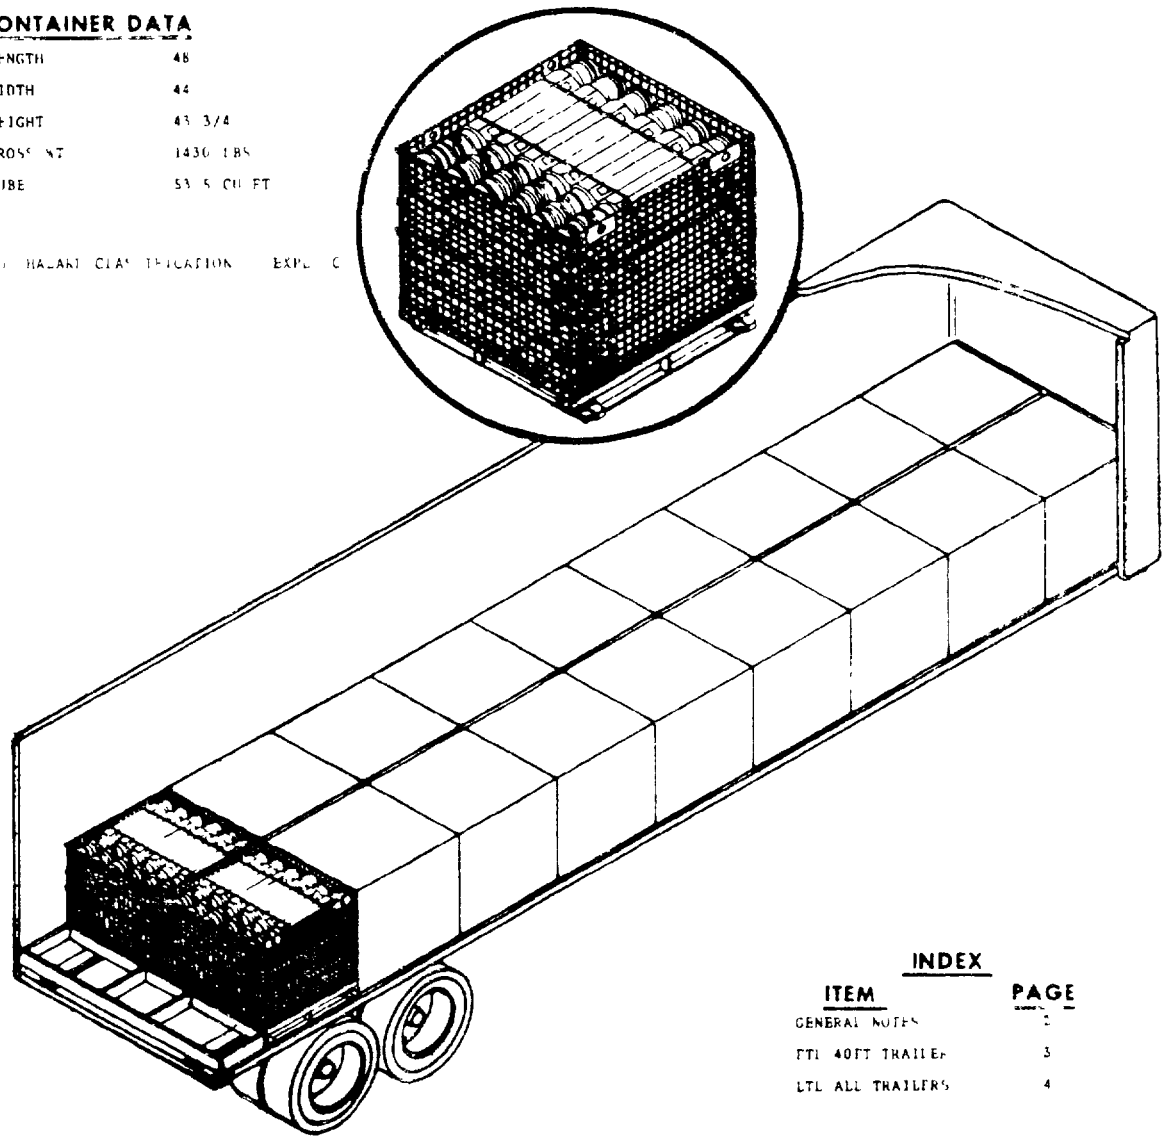

### INDEX


| ITEM | PAGE |
|---|---|
| GENERAL NOTES | 2 |
| FTL 40FT TRAILER | 3 |
| LTL ALL TRAILERS | 4 |


NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS, MIL HDBK 138 (NAVY)

AUTHORIZED FOR HIGHWAY SHIPMENT ONLY

D.K.S. Gray DDMC 10/12/84
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J. Kelly 10/22/84
SIGNATURE AIRSYSCOM SAT DIRECTION DATE

ORIGINATOR Charles McCarthy 9/27/84
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

# GENERAL NOTES

1 THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING AIRBOC WHEN CONTAINED IN THE CNU 313/E PALLET CRATE.

2 THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44 AND 45 FT VAN TRAILERS WITH NAILABLE OR NON NAILABLE FLOORS. ALL TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE EXTREME REAR OR WESTERN POSITION.

3 THE REAR BLOCKING ASSEMBLY, DETAIL B, SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED.

**WARNING**

DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING BY THIS METHOD

4 SWAYBRACING CONSISTS OF DOUBLED 2 X 4'S CENTERED ON THE FLOOR OF THE TRAILER. TRAILERS WITH NON NAILABLE FLOORS USE THE SAME SWAYBRACING WITHOUT NAILING TO THE FLOOR.

5 THE LOADING SEQUENCE CONSISTS OF INSTALLING THE FRONT BULKHEAD, PLACING THE FIRST PALLET CRATE AGAINST IT AND THE TRAILER SIDEWALL. THEN PLACE THE NEXT PALLET CRATE IN THE ROW AND NAIL THE FIRST 8 FOOT SECTION OF SWAYBRACING TO THE FLOOR. THEN PLACE THE FIRST TWO PALLET CRATES IN THE ADJOINING ROW UP AGAINST THE BULKHEAD AND BETWEEN THE SIDEWALL AND SWAYBRACING. REPEAT UNTIL LOAD IS COMPLETE (SEE TABLE 1 BELOW) AND INSTALL REAR BLOCKING ASSEMBLY. LADING IS ONE LAYER HIGH, DO NOT STACK.


6 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR TRAILER WILL NOT EXCEED THESE LIMITATIONS.

7 AFTER BLOCKING AND BRACING HAVE BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA, CLOSE AND SEAL TRAILER DOORS AND ATTACH PROPER PLACARDS TO BOTH SIDES, FRONT AND BACK OF TRAILER.


8 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL STD 1320 (NAVY).

# FTL 40,42,44 &45 FT TRAILERS (VAN)

| TRAILER LENGTH | NO. OF CONTAINERS | TRUCKLOAD WEIGHT |
|---|---|---|
| 40 FT | 18 | 25,900 LB |
| 42 OR 44 FT | 20 | 28,650 LBS |
| 45 FT | 22 | 31,500 LBS |

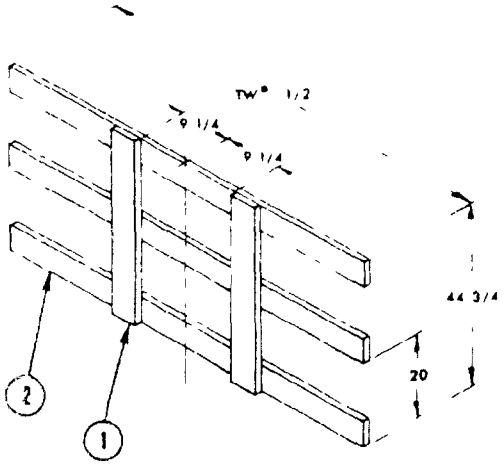


**DETAIL A**
FRONT BULKHEAD
(1 REQUIRED)

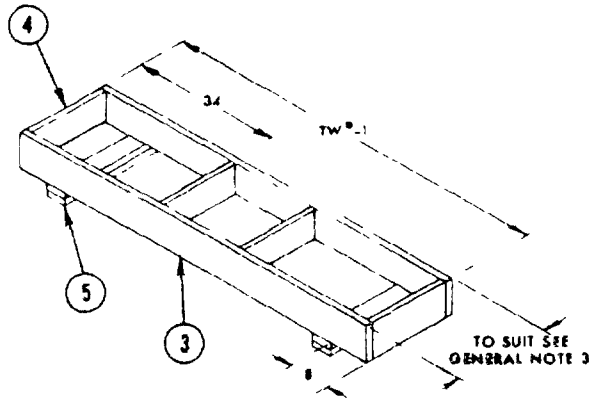



**DETAIL B**
REAR BLOCKING ASSEMBLY
(1 REQUIRED)

* TW = TRAILER WIDTH



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

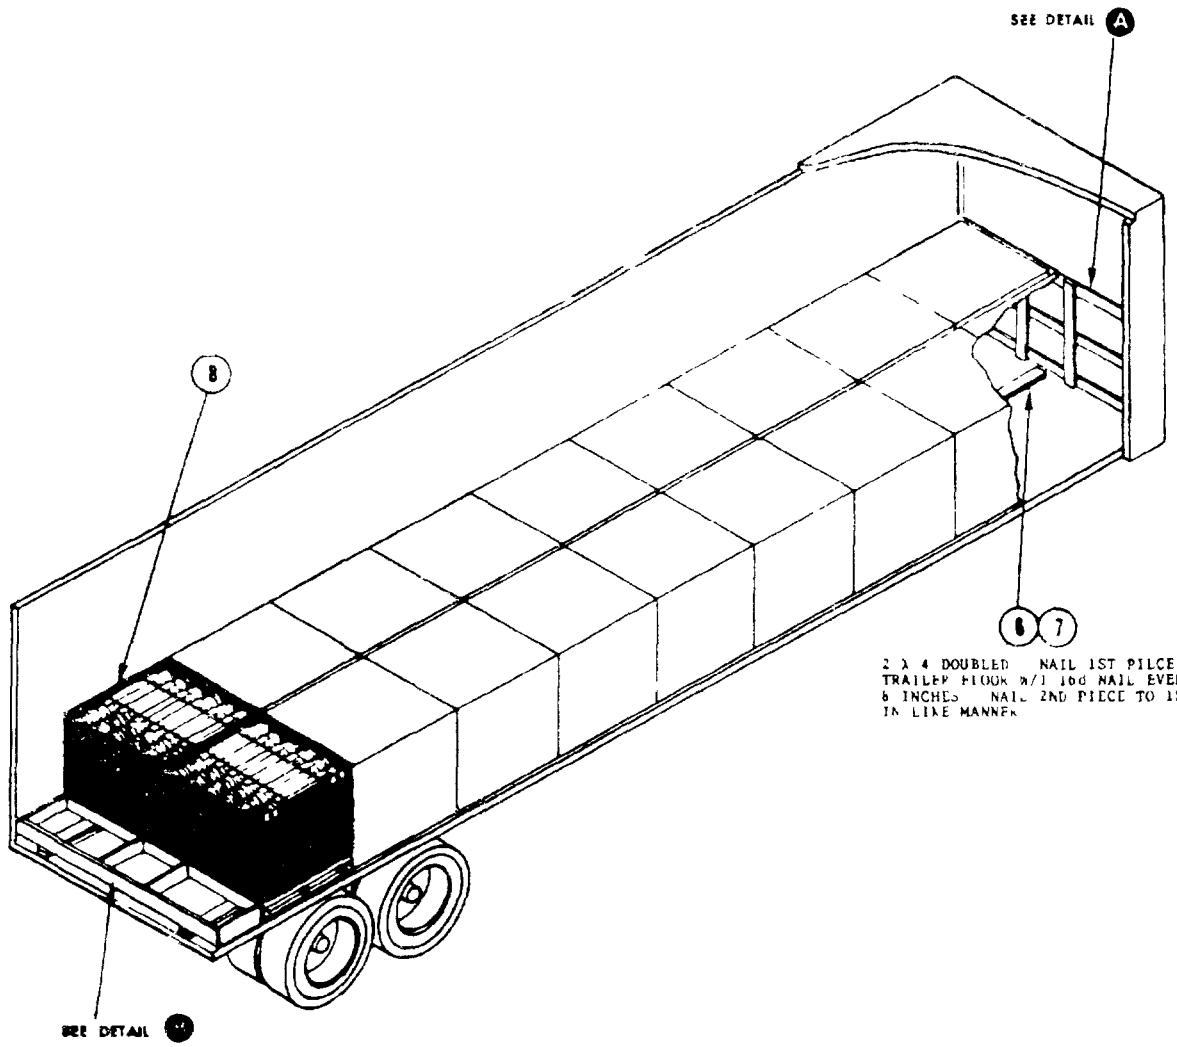


| NO REQ | ITEM NO | DESCRIPTION | DIMENSIONS | NAIL TO | NUMBER | SIZE |
|---|---|---|---|---|---|---|
| | | LIST OF MATERIALS | | | NAILS | |
| AS REQ'D | 8 | PALLET CRATE CNo - 3137C MIL-C 2121 SIZE 4 | 48) 44 X 4" 3/4 | - | | |
| 2 | 7 | SWAY BRACE | 2 X 4 X 48 | SEE FIELD NOTE 6 | | |
| 8 | 6 | SWAY BRACE | 2 X 4 X 96 | SEE FIELD NOTE 6 | | |
| 4 | 5 | SUPPORT | 2 X 4 X TO SUIT | 7<br>4 | 4/JOINT<br>3/PIECE | 10d<br>10d |
| 4 | 4 | STRUT | 2 X 8 X TO SUIT | SEE 7 | - | - |
| 2 | 3 | HORIZONTAL | 2 X 8 X TW*-1 | 4 | 4/JOINT | 16d |
| 3 | 2 | HORIZONTAL | 2 X 6 X (TW*1/2) | SEE 1 | - | - |
| 2 | 1 | VERTICAL | 2 X 8 X 44 3/4 | 2 | 4/JOINT | 10d |

* TW - TRAILER WIDTH

FTL 10 FT TRAILER (VAN)




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

# LTL ALL LENGTH TRAILERS (VAN)

1. WHEN REQUIRED TO SHIP LESS THAN TRUCKLOAD LADING MUST CONSIST OF AN EVEN NUMBER OF PALLET CRATES USE THE SAME BULKHEAD AS SHOWN IN DETAIL A USE FLOOR BLOCKING AS SHOWN BELOW INSTEAD OF REAR BLOCKING ASSEMBLY DETAIL B
2. USE SWAY BRACING OF PROPER LENGTH PIECES 3 AND 4

**WARNING**

DO NOT USE TRAILERS WITH NON NAILABLE FLOORS WHEN SHIPPING ANY LTL TRAILERS MUST HAVE NAILABLE FLOORS

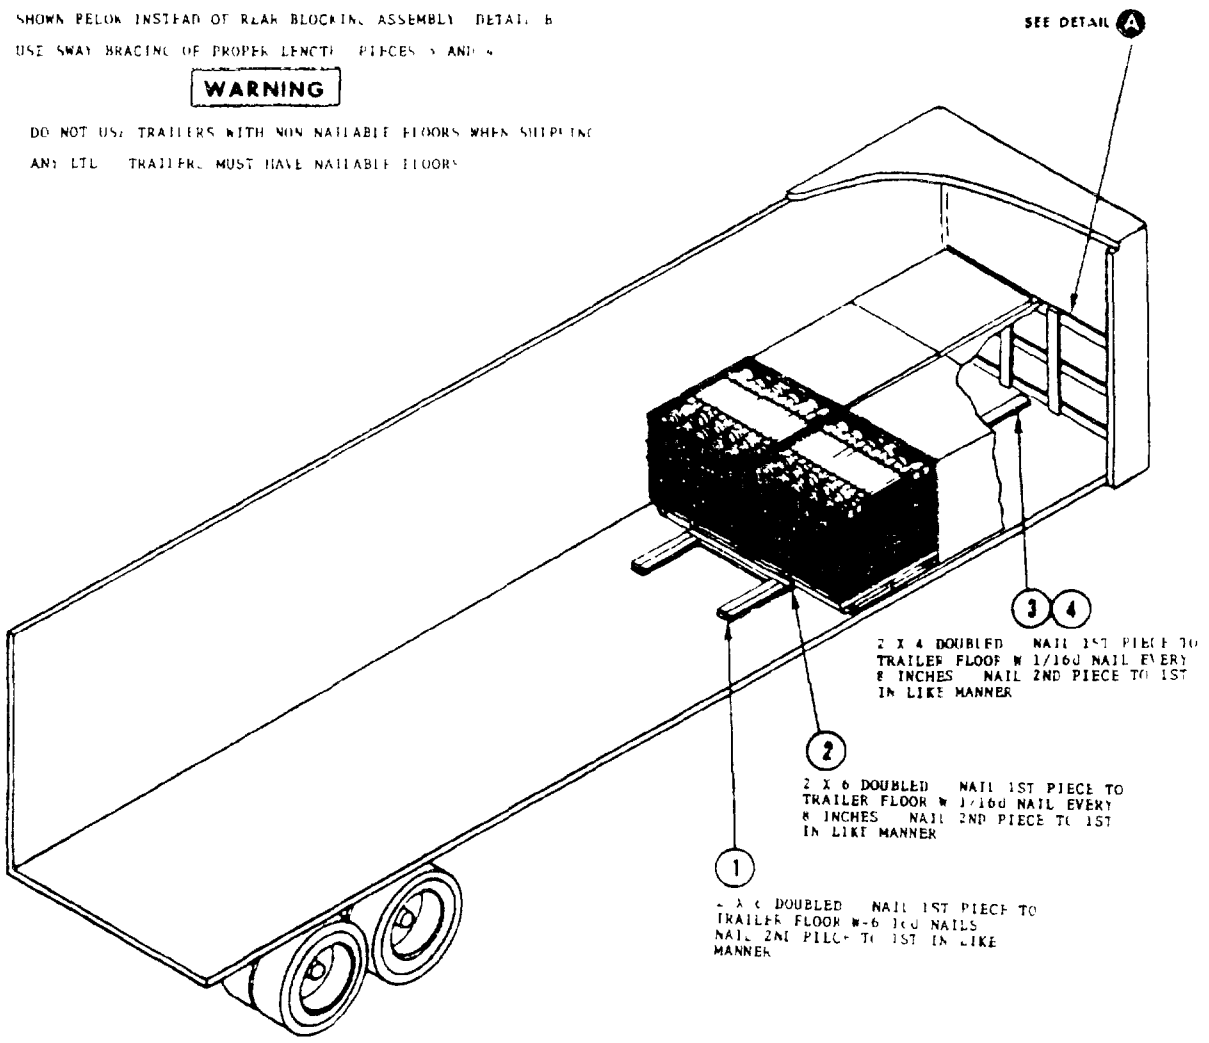


| NO REQ'D | ITEM NO | DESCRIPTION | DIMENSION | NAIL TO | NUMBER | SIZE |
|---|---|---|---|---|---|---|
| | | | | | NAILS | |
| AS REQ'D | 4 | SWAY BRACE | 2 X 4 X 4 | SEE FIELD NOTE | | |
| AS REQ'D | 3 | SWAY BRACE | X 4 X 96 | SEE FIELD NOTE | | |
| 2 | 2 | CROSSMEMBER | 2 X 6 X 2 | SEE FIELD NOTE | | |
| 2 | 1 | BACKUP CLEAT | 2 X 6 X 20 | SEE FIELD NOTE | | |

LIST OF MATERIALS

**TYPICAL LTL (VAN)**

REVIEW ACTIVITY
NAVY AS OS

PREPARING ACTIVITY
NAVY OS
(PROJECT NO 8140 N624)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**OFFICIAL BUSINESS**
PENALTY FOR PRIVATE USE $300

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12062 WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding Officer
Navy Weapons Station Earle
Attn: NWHC (Code 803-SR2)
Colts Neck, NJ 07722-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions — Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)* |

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |
| | |

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2006-10-23T22:48Z
Check the source to verify that this is the current version before use.

DD FORM 1426 82 MAR — PREVIOUS EDITION IS OBSOLETE