MILITARY SPECIFICATION SHEET

CLIP, DOUBLE SLOT, SPRING TENSION

The complete requirements for procuring the clip described herein shall consist of this document and the latest issue of specificatcn MIL-C-24066.

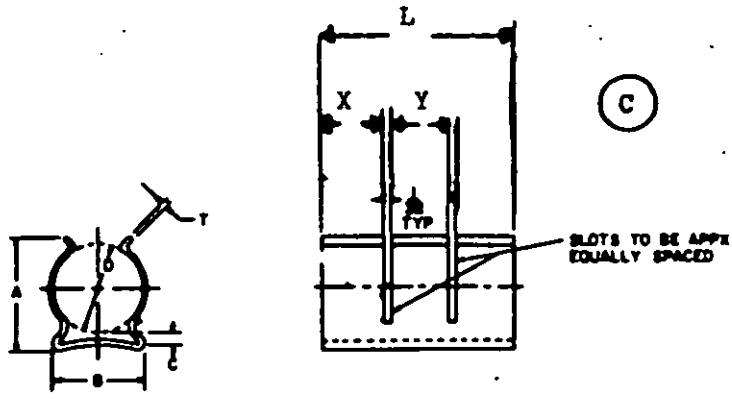


FIGURE 1

FIGURE 2

Notes:
All dimensions are in inches.
Tolerances are not cumulative.

Configuration

(C) Denotes change

PSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:55Z
Check the source to verify that this is the current version before use.

Requirements.

1. All dimensions are with clip secured to a flat surface with nominal part inserted.

Part Number	Part Number	D (Dia.) ±0.010	L Length ±0.010	H Mtg. Hole ±0.003	T Material thk. ±0.003	A ±0.020	B ±0.020	C Min.	E ±0.010	F ± 0.005	G ±0.005	X * ±.030	Y * ±.030	Superseded Part number of MS28137(Wep)	Superseded Part number of MS28137(Wep)
Spring Steel	Copper Beryllium													Spring Steel	Copper Beryllium
Cadmium Plated	Cadmium Plated													Cadmium Plated	Silver Plated
						Figure 1									
M24066/4-101	M24066/4-001	0.195	0.625	0.093	0.012	0.270	0.220	0.035	0.156	0.312	-----	.190	.190	MS28137-1	MS28137-101
M24066/4-102	M24066/4-002	.235	.625	.093	.012	.320	.260	.040	.156	.312	-----	.190	.190	MS28137-2	MS28137-102
M24066/4-103	M24066/4-003	.400	.875	.093	.012	.490	.420	.050	.187	.500	-----	.190	.190	MS28137-3	MS28137-103
M24066/4-104	M24066/4-004	.500	1.031	.093	.016	.610	.530	.050	.234	.562	-----	.230	.230	MS28137-4	MS28137-104
M24066/4-105	M24066/4-005	.562	1.062	.128	.016	.690	.590	.085	.250	.562	-----	.330	.330	MS28137-5	MS28137-105
M24066/4-106	M24066/4-006	.875	.625	.128	.024	1.016	.930	.110	.156	.312	-----	.190	.190	MS28137-6	MS28137-106
						Figure 2									
M24066/4-107	M24066/4-007	.135	1.187	.077	.010	.270	.210	.035	.156	.875	0.438	.380	.380	MS28137-7	MS28137-107
M24066/4-108	M24066/4-008	.375	1.000	.093	.012	.450	.400	.040	.093	.813	.406	.280	.390	MS28137-8	MS28137-108
M24066/4-109	M24066/4-009	.375	1.187	.093	.012	.450	.400	.040	.187	.813	.406	.380	.390	MS28137-9	MS28137-109
M24066/4-110	M24066/4-010	.400	1.000	.093	.012	.490	.420	.050	.093	.813	.406	.280	.390	MS28137-10	MS28137-110
M24066/4-111	M24066/4-011	.400	1.125	103	.016	.490	420	.050	.187	.750	.375	.380	.380	MS28137-11	MS28137-111
M24066/4-112	M24066/4-012	.500	1.625	.128	.016	.610	.530	.050	.250	1.125	.[illegible]	.560	.440	MS28137-12	MS28137-112
M24066/4-113	M24066/4-013	.562	1.625	.128	.022	.690	.600	.080	.250	1.125	.562	.560	.440	MS28137-13	MS28137-113
M24066/4-114	M24066/4-014	.670	1.375	.128	.024	.820	.720	.090	.250	.875	.437	.440	.440	MS28137-14	MS28137-114
M24066/4-115	M24066/4-015	.750	2.000	.144	.028	.920	.810	.100	.250	1.500	.750	.640	.640	MS28137-15	MS28137-115
M24066/4-116	M24066/4-016	.875	2.000	.144	.028	1.110	.930	.110	.250	1.500	.750	.640	.640	MS28137-16	MS28137-116
M24066/4-117	M24066/4-017	1.000	1.875	.144	.032	1.220	1.060	.120	.250	1.375	.688	.600	.600	MS28137-17	MS28137-117

* OPTIONAL DESIGN WHERE SLOTS DIVIDE CLIP INTO 3 EQUAL PARTS (±.030) IS PERMISSIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:55Z
Check the source to verify that this is the current version before use.

2. Material. - Copper-beryllium alloy, cadmium plated conforming to QQ-C-533 and QQ-P-416; Spring steel, cadmium plated conforming to QQ-S-777 and QQ-P-416.

Review activity:
Navy - AS

Preparing activity
Navy - EC
(Project 5340-N053)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:55Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:55Z
Check the source to verify that this is the current version before use.