
FED. SUP CLASS
6680

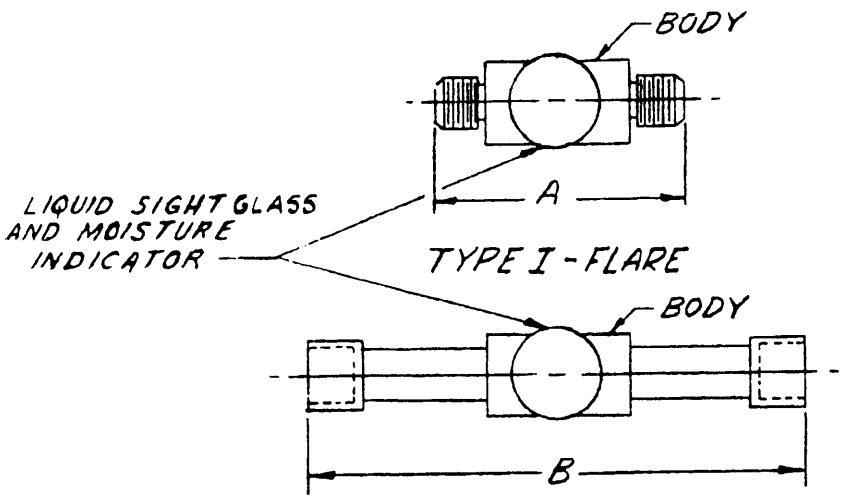

DASH NO. (D)	FORMER PART NO. (D)	TYPE	SIZE	"A" DIMENSION ± 3/4 INCH	"B" DIMENSION ± 1 INCH
-3F	MS -7	I	3/8	3	
-4F	MS -8	I	1/2	3 1/2	
-5F	MS -9	I	5/8	3 3/4	
-3S	MS -10	II	3/8		5 1/2
-4S	MS -11	II	1/2		5 1/2
-5S	MS -12	II	5/8		5 3/4

CONNECTION END

TYPE I - EXTERNAL FLARE, REFRIGERATION, DIMENSIONS SPECIFIED ON MS 35873.

TYPE II - SOLDER JOINT, FEMALE, REFRIGERATION, DIMENSIONS SPECIFIED ON MS 35925.

NOTES

1. INDICATORS SHALL BE SUITABLE FOR REFRIGERANT TYPE 12 OR TYPE 22 OF BB-F-1421.
2. PROTECTIVE SIGHT GLASS CAPS OR COVERS ARE ACCEPTABLE IF INTEGRAL PART OF MANUFACTURER'S DESIGN.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. REFERENCES DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
5. (D) PART NUMBERS: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 17798-3F. THE DASH NUMERAL INDICATES END CONNECTION SIZE IN 1/8 INCH INCREMENTS. THE DASH LETTER INDICATES TYPE OF END CONNECTION, I.E., "F" EQUALS FLARE END, "S" EQUALS SOLDER END.

APPROVED 26 FEB 1962 REVISED (A) 24 MAY 1965 (B) 29 MAY 1969 (C) 19 NOV 1971 (D) 21 MAR 75

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review: ARMY MD, DSA GS
User: CS

P.A.		TITLE	MILITARY STANDARD
ARMY	GL	INDICATOR, SIGHT, LIQUID REFRIGERANT	MS 17798
OTHER GOVT NAVY	YD		
Procurement Specification MIL-I-23208		SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.