FED. SUP CLASS
6230

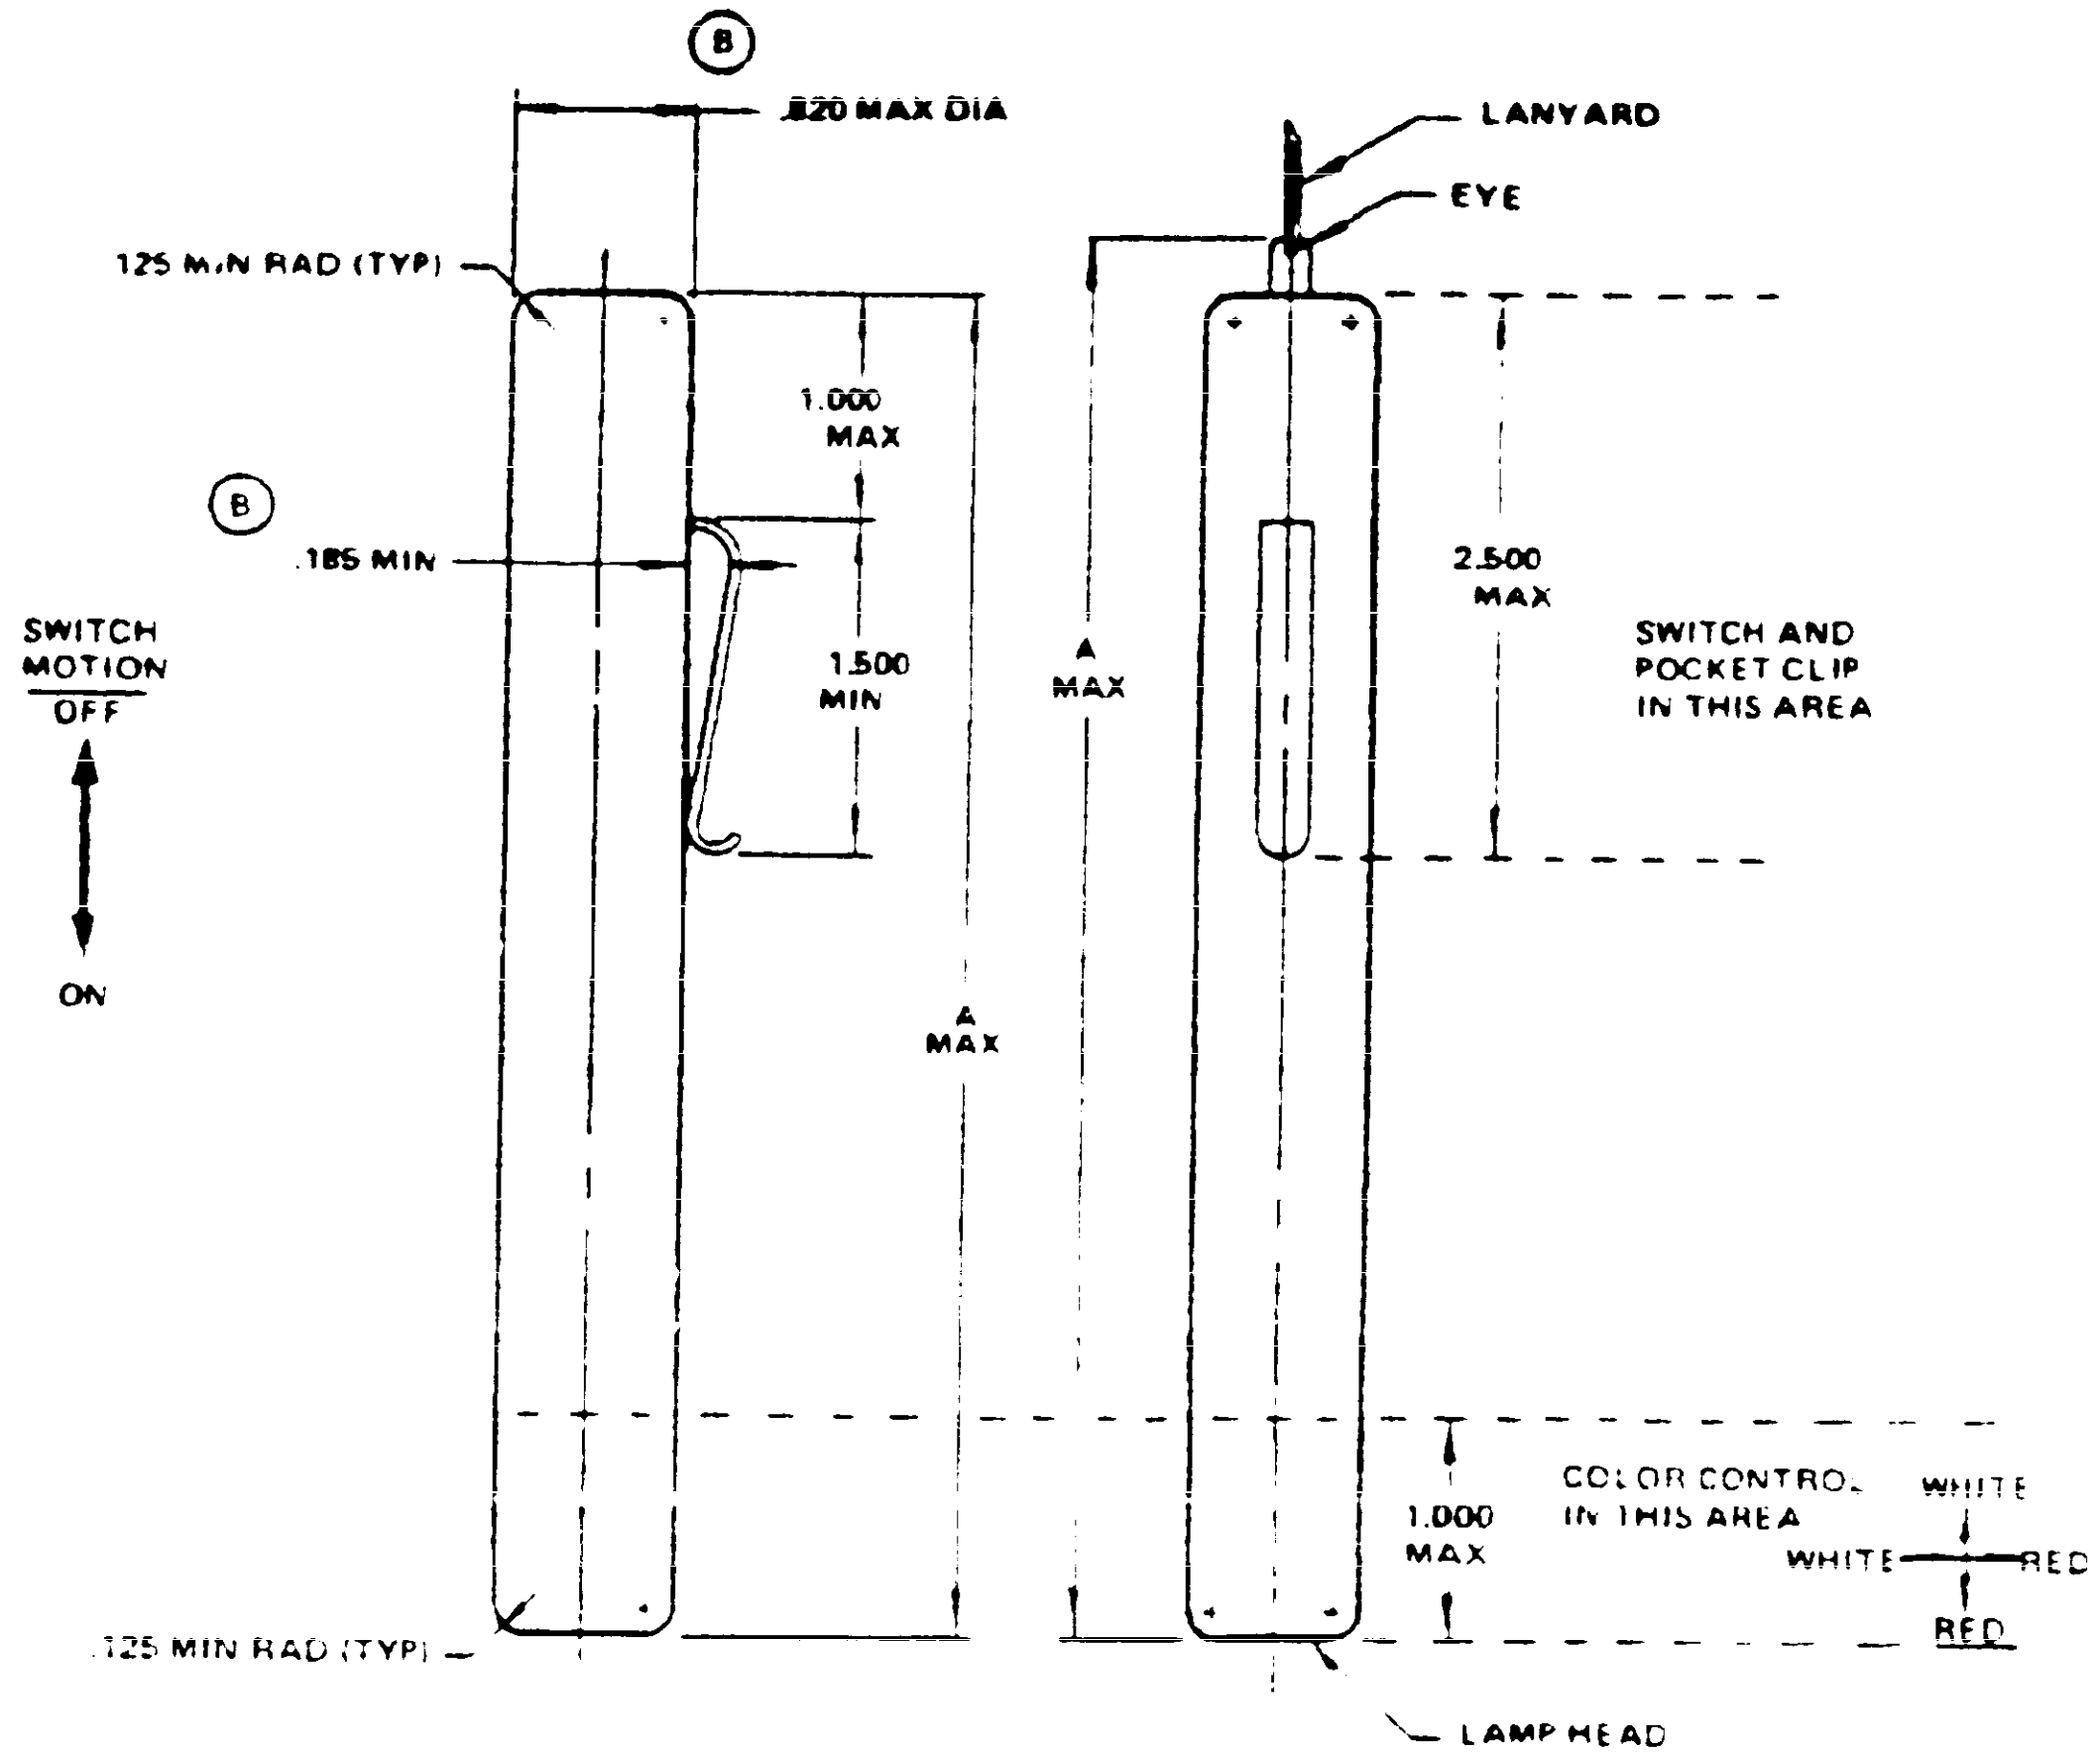

DASH NO.	ITEM	A MAX LENGTH	MAX WT OZ	SUPERSEDES	SUPERSEDES MIL-F-7726D (ASG)
-1	FLASHLIGHT, NO LANYARD, R/W LENS	6.00	1.5	AN8023-2	STYLE I
-2	FLASHLIGHT, LANYARD, R/W LENS	6.25		AN8023-1	STYLE II
Ⓒ -3	FLASHLIGHT, NO LANYARD, NVG/W LENS	6.00			
Ⓒ -4	FLASHLIGHT, LANYARD, NVG/W LENS	6.25			

R/W (RED AND WHITE) NVG/W (NIGHTVISION GREEN AND WHITE)

Ⓒ NOTES:

1. WEIGHT IS LESS BATTERY CELLS AND LANYARD.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE IS DECIMAL ±.02.
3. THE FLASHLIGHT NEED NOT HAVE THE EXACT SHAPE SHOWN, BUT SHALL BE CONTAINED WITHIN THE DIMENSIONAL OUTLINE SHOWN, DESIGNED TO ACCOMMODATE TWO (2) SIZE "AA" CELL BATTERIES AND ONE (1) LAMP, INDUSTRY TRADE NUMBER 222.
4. SWITCH MAY BE LOCATED IN BUTT END OF FLASHLIGHT.
5. COLOR OF LENS IS CHANGED BY TWISTING THE COLOR CONTROL HEAD, RIGHT OR LEFT.
6. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
7. FOR DESIGN PURPOSED, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.

APPROVED 1 Mar 61 REVISED Ⓐ 15 Mar 63 Ⓑ 1 OCT 71 Ⓒ 15 [illegible] 1990

Review Activity
DLA - GS

DIST. STMT. A. Approved for public release; distribution is unlimited

Ⓒ AMSC N/A

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P.A. USAF 82 Other Cust ARMY AV AIR FORCE - 99 NAVY AS	TITLE Ⓒ FLASHLIGHT, PENLIGHT STYLE	MILITARY STANDARD MS21998
PROCUREMENT SPECIFICATION MIL-F-7326	SUPERSEDES AN8023	SHEET 1 OF 1

DD FORM 1 SEP 61 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.