
FSC 5975

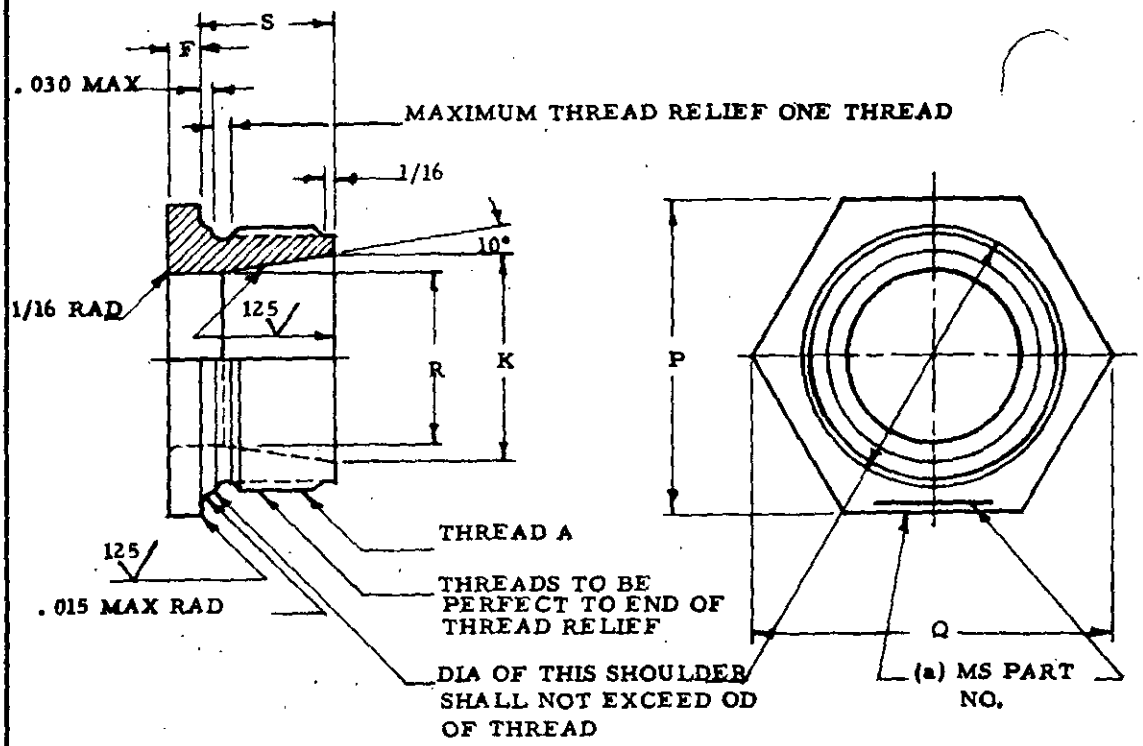

THREADS TO BE IN ACCORDANCE WITH SPECIFICATION MIL-S-7742, EXCEPT 1-3/4-18 NS-2A AND 2-18 NS-2A THREADS WHICH SHALL BE IN ACCORDANCE WITH AMERICAN STANDARD ASA B-1.

MATERIAL: ALUMINUM ALLOY; SPECIFICATION QQ-A-351, CONDITION T; SPECIFICATION QQ-A-601, CLASS 4; SPECIFICATION QQ-A-591, OR COMMERCIAL GRADE SUITABLE TO THE PROCURING ACTIVITY.

FINISH: THE SURFACE FINISH SHALL BE IN ACCORDANCE WITH STANDARD MIL-STD-10, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS C.

REMOVE ALL BURRS AND SHARP EDGES.

(a) OPTIONAL MARKING: ROLL MS PART NUMBER IN THE CENTER OF HEX FLAT.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES; FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.

(A) CANCELLED 5 JANUARY 1965. USE AN 3064

APPROVED 4 MARCH 1959 REVISED (A) 5 JANUARY 1965

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS39074
ARMY-MU	A- N- AF-	BOX CONNECTOR, ELECTRICAL	(MU)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 OCT 52 672

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.

APPROVED 4 MARCH 1959 REVISED (A) 5 JANUARY 1965

FSC 5975

MS PART NUMBER	CONDUIT SIZE	THREAD A	F	K DIA	P	Q APPROX	R DIA	S	FIN
-3	3/16	1/2-28 UNEF-2A	1/8	.332	11/16	51/64	.167	5/8	
-4	1/4	5/8-24 NEF-2A	1/8	.394	13/16	15/16	.229	5/8	
-6	3/8	3/4-20 UNEF-2A	1/8	.519	15/16	1- 3/32	.354	5/8	
-8	1/2	7/8-20 UNEF-2A	3/16	.669	1- 1/16	1-15/64	.479	11/16	
-10	5/8	1 -20 UNEF-2A	3/16	.794	1- 1/4	1- 7/16	.604	11/16	
-12	3/4	1-3/16-18 NEF-2A	3/16	.929	1- 3/8	1-19/32	.729	11/16	
-16	1	1-7/16-18 NEF-2A	3/16	1.214	1- 5/8	1- 7/8	.979	11/16	
-20	1-1/4	1-3/4-18 NS-2A	3/16	1.469	2	2- 5/16	1.229	3/4	
-24	1-1/2	2 -18 NS-2A	3/16	1.724	2- 3/16	2-17/32	1.479	13/16	
-28	1-3/4	2-1/4-16 UN-2A	1/4	1.976	2- 7/16	2-13/16	1.729	7/8	
-32	2	2-1/2-16 UN-2A	1/4	2.229	2-13/16	3- 1/4	1.979	15/16	
-40	2-1/2	3 -16 UN-2A	1/4	2.744	3- 3/8	3-57/64	2.479	1	

EXAMPLE OF PART NUMBER: MS -10= 5/8 CONDUIT SIZE, 1-1/4 ACROSS FLATS.

(A) CANCELLED 5 JANUARY 1965. USE AN 3064

MS39074 (Mc)

MILITARY STANDARD

BOX CONNECTOR, ELECTRICAL

SHEET 2 OF 2

SUPERSEDES:

PROCUREMENT SPECIFICATION NONE

OTHER INT. A- N- AF-

CUSTODIANS ARMY- MU

DD FORM 1 OCT 52 672

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z Check the source to verify that this is the current version before use.